

Edition: 02/05 - subject to change


supersedes: 05/02

Status: valid

64516 (230/240V)

■ Product description

The 64516 for photo- and video- luminaries and for studio. The 64516 is the long-life lamp of the 64515 with 75h average service life.

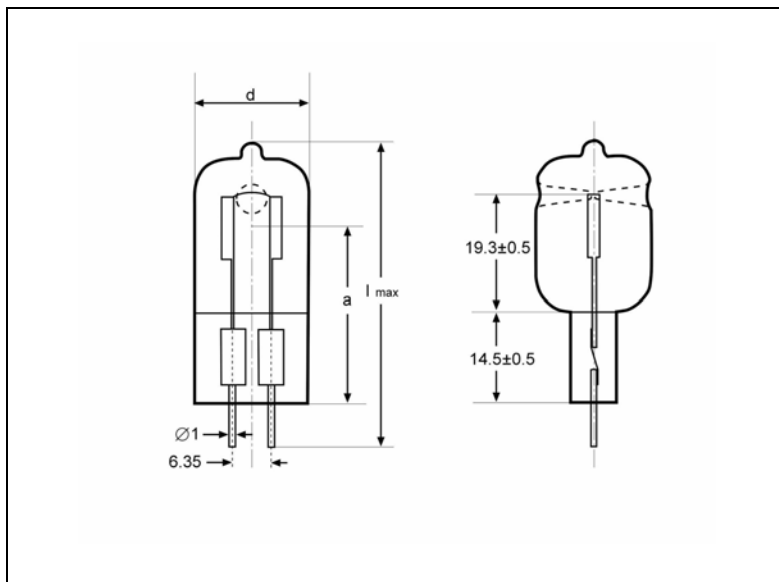

■ Technical data

Order reference	64516
ANSI	-
LIF	CP/97
Rated wattage	W 300
Voltage	V 230 (240)
Average service life	h 75
Colour temperature	K 3100
Luminous flux	lm 7900 (7800)*
Base	GX 6.35
Bulb diameter d	mm max. 18.5
Lamp length l	mm max. 53
LCL a	mm 27±1
Filament dimensions (w x h)	mm 9.72 x 12.5
Type of filament	Dimple technology

* referring to 240V

■ Required conditions of operation

Maximum permissible seal temperature	°C 450
Burning position	s90
Required protection	G-melt flow field 250V, quick, 4 A, DIN 41660 (CEE 4/IEC 127)