

Edition: 12/05 - subject to change

Substitutes: 03/04

Status: valid


64663 HLX

■ Product description

The OSRAM 64663 HLX is a tungsten halogen low voltage lamp for projection purposes.

■ Technical data

Order reference	64663 HLX	
ANSI	EVD	
LIF	A1/239	
Rated lamp wattage	W	400
Rated lamp voltage	V	36
Average service life	h	50
Luminous flux	lm	16000
Colour temperature	K	approx. 3550
Diameter d	mm	15 max.
Lamp length (overall) L	mm	60 max.
Pinch Width B	mm	20
Q	mm	18
q	mm	6
LCL a	mm	36 ± 0.25
Filament type	CBar-6	
Filament dimensions	mm ²	approx. 9.3 x 4.9
Base	G6.35	
Deviation of filament center from base axis not more than:	mm	1.0

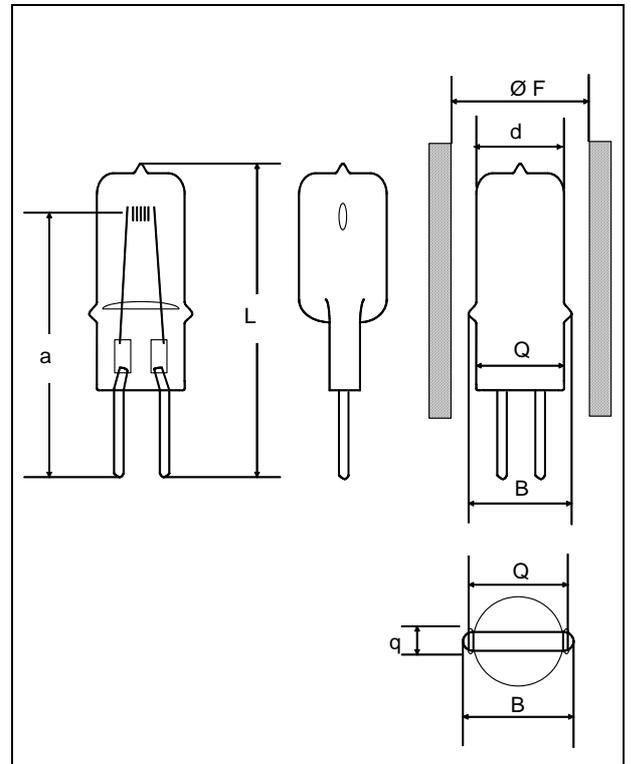

■ Lamp operation

Maximum permissible pinch temperature	°C	400
Burning position	s90	
Required fuse protection	16 A quick-acting in the secondary circuit	
Further	F denotes minimum free space required due to the size of the lamp. In practice a greater free space may be necessary to get heat emission under control. (min. 21 mm)	