

# DENON

## PROFESSIONAL

### Setting up additional mics with the Envoi System

#### Additional UHF Receiver for 2<sup>nd</sup> Mic Channel:

ENVOI FREQ AGILE UHF RECEIVER – Order code: ENVOIRECEIVER2XEU

#### 2<sup>nd</sup> Hand Held Mic:


ENVOI MIC – Order code: ENVOIMICXEU

#### Belt Pack Transmitter complete with Headset and Lavalier Microphones:

ENVOI BELT PACK – Order code: ENVOIHLTRANSMITXEU

---

#### How to fit the UHF Receiver.

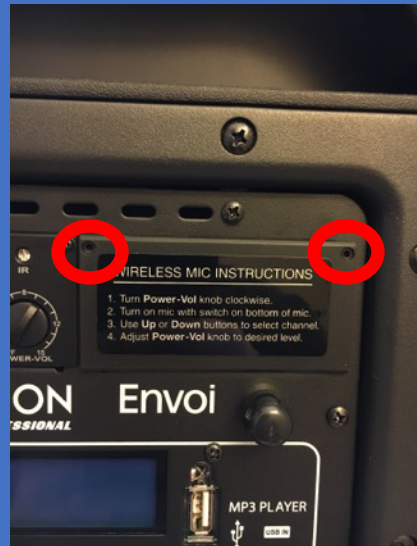

Remove the two screws as highlighted

Lift out cover panel.




Untwist cable tie to remove panel



# Unpack the receiver module





# Locate the two connectors, one large and one small.

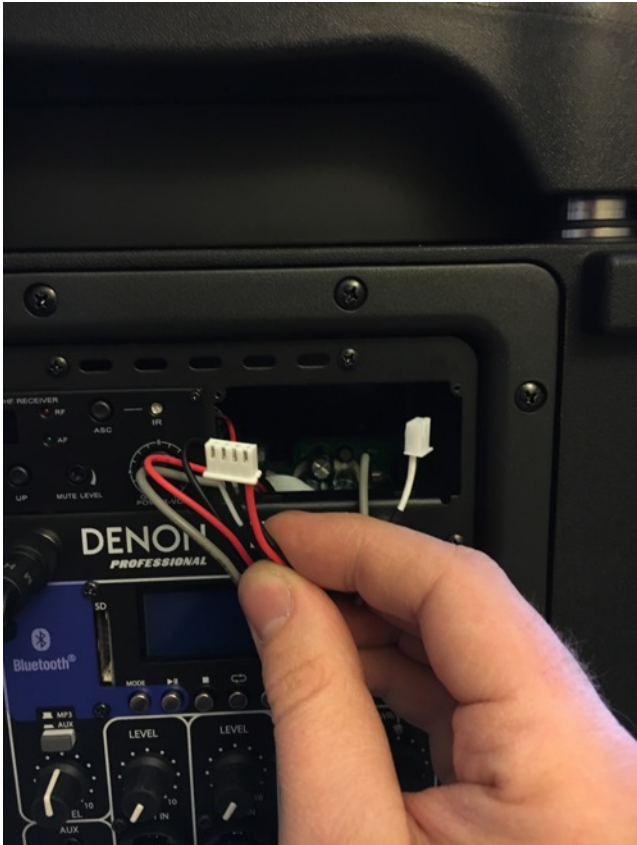




**Plug the large connector to the socket on the top side of the board**

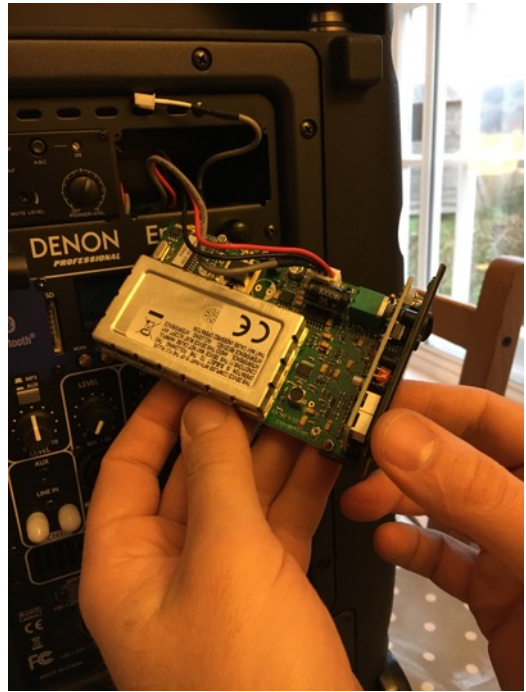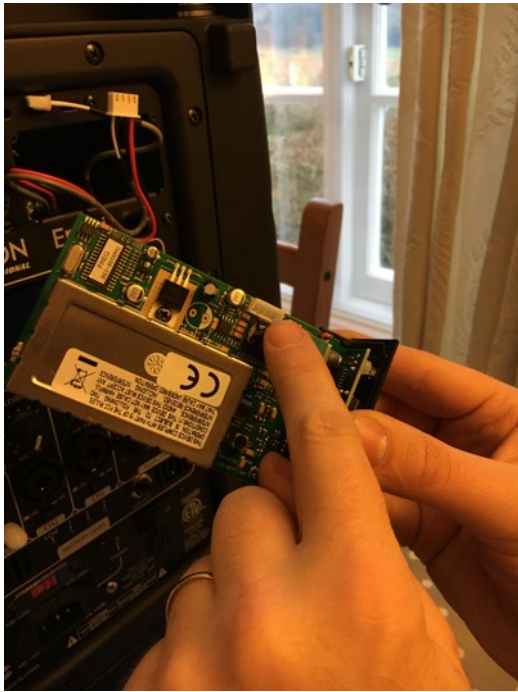

**And the small connector to the socket on the bottom of the board**

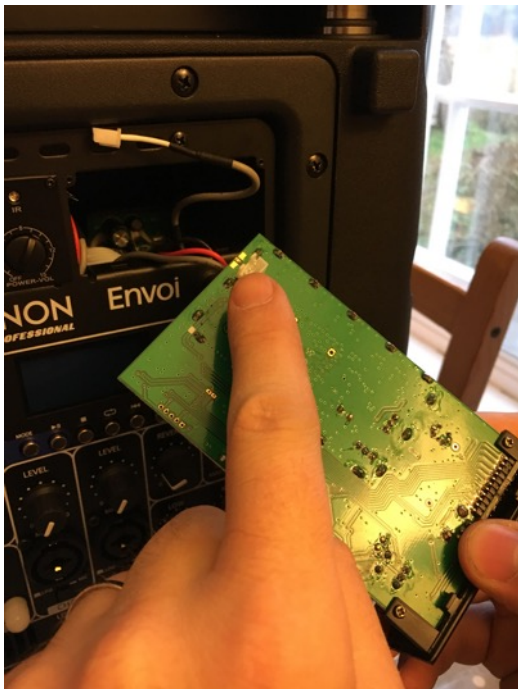


**Now slot the receiver in to the Envoi taking care not to trap the cables.**

Secure the receiver in place using the screws removed in step one. Remove the antenna cover and fit the new antenna supplied as part of the receiver kit.



Switch on the receiver and select a different channel to the one selected on the first receiver.

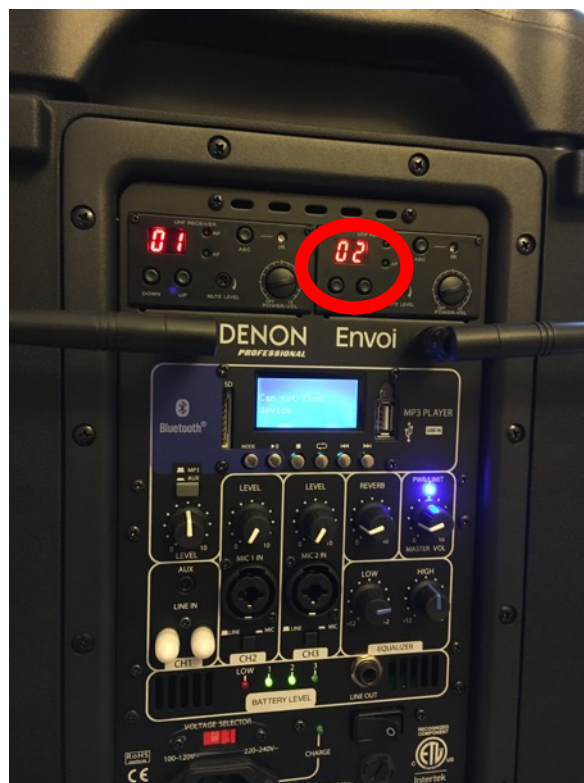



Now take your 2<sup>nd</sup> Microphone, either handheld or belt pack kit



Insert batteries and locate the IR receiver



Press the “ASC” button and the IR LED will light up



Point the microphones IR receiver towards the LED. When connected the “RF” LED will light up.

