

# 12CXN76

---

Coaxials - 12.0 Inches





- 700 W continuous program power capacity
- 80° nominal coverage
- 45 - 18000 Hz response
- 99 dB sensitivity
- 50.5 mm (2") HF unit exit diameter
- Single Neodymium magnet assembly



# 12CXN76

Coaxials- 12.0 Inches

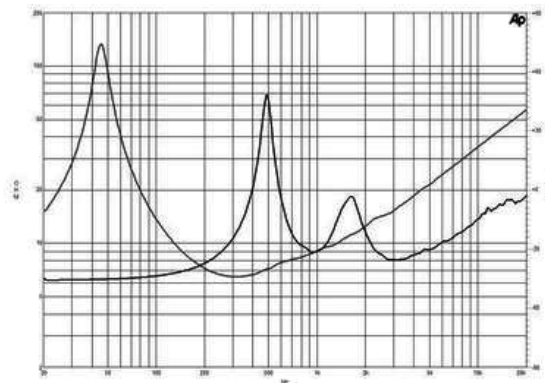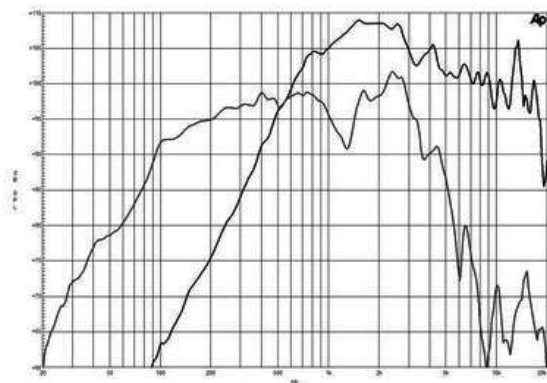

## SPECIFICATIONS

Nominal diameter	320 mm (12.0 in)
Nominal impedance	8 Ω
Minimum impedance lf	6.5 Ω
Minimum impedance hf	8.0 Ω
Frequency range	45 - 18000 Hz
Dispersion angle <sup>1</sup>	80 °
Magnet material	Neodymium Ring

## PARAMETERS

Fs	42 Hz
Re	5.0 Ω
Qes	0.2
Qms	8.0
Qts	0.19
Vas	120.0 dm <sup>3</sup> (4.2 ft <sup>3</sup> )
Sd	522.0 cm <sup>2</sup> (80.9 in <sup>2</sup> )
η <sub>o</sub>	4.1 %
X <sub>max</sub>	4.0 mm
X <sub>var</sub>	6.0 mm
M <sub>ms</sub>	47 g
Bl	17.6 Txm
Le	0.8 mH
EBP	210 Hz

## SPECIFICATIONS LF UNIT

LF Sensitivity <sup>2</sup>	99.0 dB
LF Nominal Power Handling <sup>3</sup>	350 W
LF Continuous Power Handling <sup>4</sup>	700 W
LF Voice Coil Diameter	76 mm (3.0 in)
LF Winding Material	Copper

## MOUNTING AND SHIPPING INFO

Overall diameter	315 mm (12.4 in)
Bolt circle diameter	298 mm (11.7 in)
Baffle cutout diameter	282 mm (11.1 in)
Depth	170 mm (6.7 in)
Flange and gasket thickness	14 mm (0.55 in)
Net weight	5.0 kg (11.0 lb)
Shipping units	1
Shipping weight	5.9 kg (13.0 lb)
Shipping box	380x380x240 mm (15x15x9.4 in)

## SPECIFICATIONS HF UNIT

HF Sensitivity <sup>5</sup>	105.0 dB
HF Nominal Power Handling <sup>6</sup>	80 W
HF Continuous Power Handling <sup>7</sup>	160 W
HF Voice Coil Diameter	75 mm (3.0 in)
HF Winding Material	Aluminium
Diaphragm material	Polyester/Titanium
Recommended crossover <sup>8</sup>	1.2 kHz

## SERVICE KIT

Service kit lf	RCK12CXN768
Replacement diaphragm	MMD9028M

- Included by -6 dB down points.
- Applied RMS Voltage is set to 2.83V.
- 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
- Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- Applied RMS Voltage is set to 2.83V.
- 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. Loudspeaker in free air.
- Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- 12 dB/oct. or higher slope high-pass filter.