



6PEV13

LF Drivers - 6.5 Inches

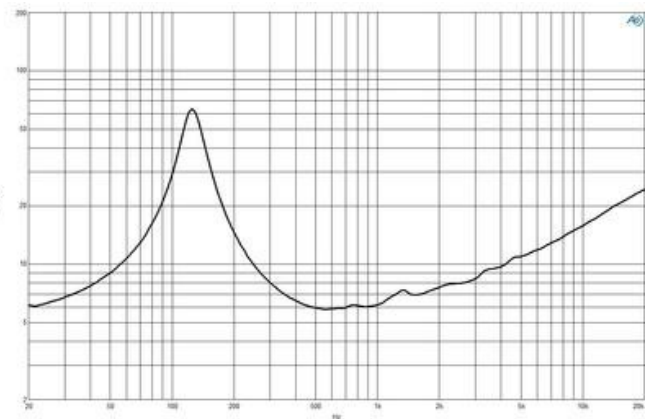

- 240 W continuous program power capacity
- 38 mm (1.5 in) aluminium voice coil
- 150 - 8000 Hz response
- 99 dB sensitivity

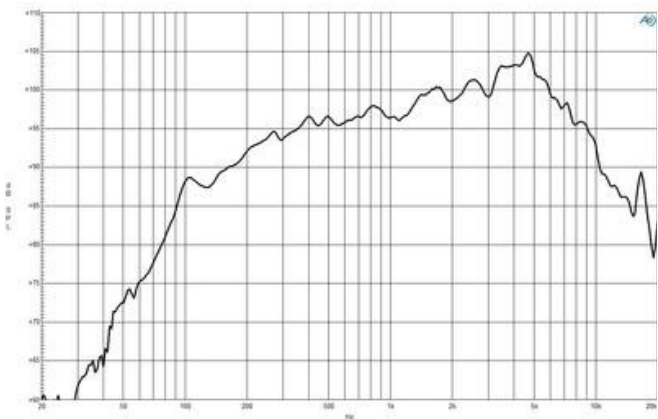

6PEV13

LF Drivers- 6.5 Inches

SPECIFICATIONS

Nominal diameter	170 mm (6.5 in)
Nominal impedance	8 Ω
Minimum impedance	6.0 Ω
Nominal power handling ¹	120 W
Continuous power handling ²	240 W
Sensitivity (1W/1m) ³	99.0 dB
Frequency range	150 - 8000 Hz
Voice coil diameter	38 mm (1.5 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	7 mm (0.28 in)
Magnetic gap depth	6 mm (0.24 in)
Flux density	1.4 T

MOUNTING AND SHIPPING INFO

Overall diameter	187 mm (7.36 in)
Bolt circle diameter	172 mm (6.77 in)
Baffle cutout diameter	145.0 mm (5.71 in)
Depth	78 mm (3.07 in)
Flange and gasket thickness	11 mm (0.43 in)
Air volume occupied by driver	0.8 dm ³ (0.03 ft ³)
Net weight	2.4 kg (5.29 lb)
Shipping units	1
Shipping weight	10.9 kg (24.03 lb)
Shipping box	215x215x135 mm (8.46x8.46x5.31 in)

DESIGN

Surround shape	Flat
Cone shape	Exponential
Magnet material	Ferrite
Spider	Single
Pole design	Straight Pole
Woofer cone treatment	None

SERVICE KIT

RCK06PEV138

PARAMETERS

F _s	126 Hz
R _e	5.2 Ω
Q _{es}	0.39
Q _{ms}	4.6
Q _{ts}	0.36
V _{as}	6.0 dm ³ (0.21 ft ³)
S _d	132.0 cm ² (20.46 in ²)
η_0	3.0 %
X _{max}	2.5 mm
X _{var}	1.5 mm
M _{ms}	6 g
Bl	8.2 Txm
L _e	0.6 mH
EBP	323 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range F_s-10F_s. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggioromo, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com