




# 6PS38

LF Drivers - 6.5 Inches

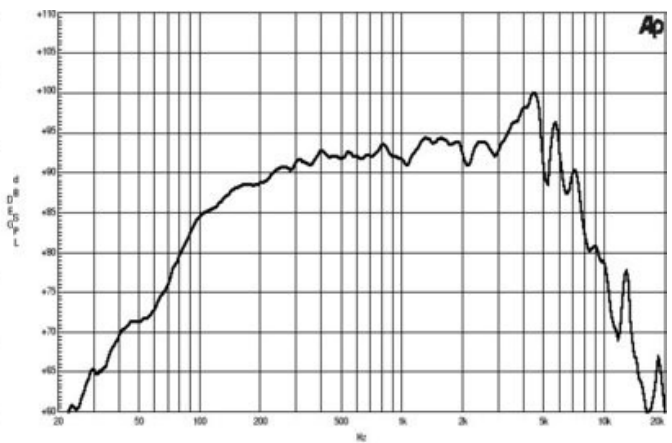

- 300W continuous power capacity
- 38 mm (1.5 in) aluminium voice coil
- 70 - 5000 Hz frequency response
- 94 dB sensitivity

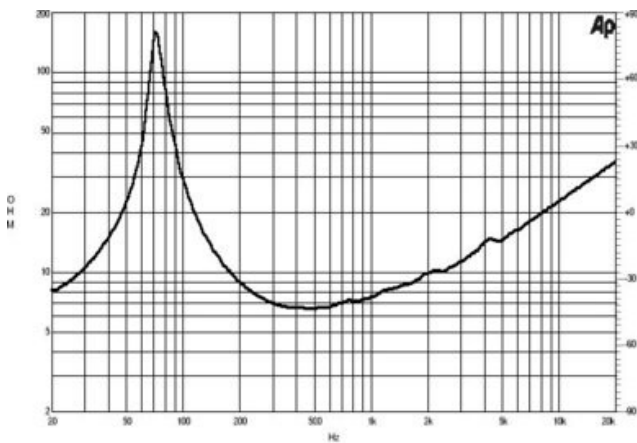

# 6PS38

LF Drivers- 6.5 Inches

## SPECIFICATIONS

Nominal diameter	170 mm (6.69 in)
Nominal impedance	8 $\Omega$
Minimum impedance	6.6 $\Omega$
Nominal power handling <sup>1</sup>	150 W
Continuous power handling <sup>2</sup>	300 W
Sensitivity (1W/1m) <sup>3</sup>	94.0 dB
Frequency range	70 - 5000 Hz
Voice coil diameter	38 mm (1.5 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	12 mm (0.49 in)
Magnetic gap depth	6 mm (0.24 in)
Flux density	1.4 T

## MOUNTING AND SHIPPING INFO

Overall diameter	187 mm (7.36 in)
Bolt circle diameter	172 mm (6.77 in)
Baffle cutout diameter	145.0 mm (5.71 in)
Depth	82 mm (3.23 in)
Flange and gasket thickness	9 mm (0.35 in)
Air volume occupied by driver	0.8 dm <sup>3</sup> (0.03 ft <sup>3</sup> )
Net weight	2.2 kg (4.85 lb)
Shipping units	4
Shipping weight	10.1 kg (22.27 lb)
Shipping box	405x225x210 mm (15.94x8.86x8.27 in)

## DESIGN

Surround shape	Roll
Cone shape	Radial
Magnet material	Ferrite Ring
Spider	Single
Pole design	Straight Pole
Woofer cone treatment	WP Waterproof Front Side
Recommended enclosure	9.0 dm <sup>3</sup> (0.32 ft <sup>3</sup> )
Recommended tuning	80 Hz

## SERVICE KIT

RCK06PS388

## PARAMETERS

Fs	75 Hz
Re	5.4 $\Omega$
Qes	0.31
Qms	11.7
Qts	0.3
Vas	8.0 dm <sup>3</sup> (0.28 ft <sup>3</sup> )
Sd	132.0 cm <sup>2</sup> (20.46 in <sup>2</sup> )
$\eta_0$	1.0 %
Xmax	6.0 mm
Xvar	7.5 mm
Mms	14 g
Bl	10.8 Txm
Le	0.6 mH
EBP	241 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggioromo, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY  
Tel. +39 055 65721 - Fax +39 055 6572312  
mail@bcspeakers.com