

Shielded flat audio cables



Applications:
Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly.
Low capacity cable.

Characteristics:
Conductors: O.F.C. red copper
Cond. Insulation: Compact PE
Core colours: Red, White
Shields: Spiral covering 100%
O.F.C. red copper
Sheath: PVC
Sheath colours: Black, Red, Blue, Yellow, Green



tasker® Code	Cond. number	Nominal section mm ²	Cond. Format. mm.	External Core Ø mm.	External Cable Dimension mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C121	2	2 x 0,25 (23 AWG)	8x0,20	2,3	4,5 x 9,0	100	B	5,5

nightly blue®



Applications:
Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly.
Low capacity cable.

Characteristics:
Conductors: O.F.C. red copper
Cond. Insulation: Compact PE
Core colours: Red, White
Shields: Spiral covering 100%
O.F.C. red copper
Sheath: Flame Retardant PVC CEI 20-22/II°
Sheath colours: Blue-night



tasker® Code	Cond. number	Nominal section mm ²	Cond. Format. mm.	External Core Ø mm.	External Cable Dimension mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C138	2	2 x 0,25 (23 AWG)	8x0,20	2,3	4,6 x 9,2	100	B	7,0


nightly blue®



Conductor Resistance Ω/Km ± 5%	Capacity Core/core pF/mt	Capacity Core/shield pF/mt
75	36	96
	Max rated Voltage AC - V	Operative Temperature °C
	49	-15 / +70

Applications:
Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly.
Low capacity cable.

Characteristics:
Conductors: n. 1 O.F.C. red copper
n. 1 O.F.C. tinned copper
Cond. Insulation: Compact PE
Core colours: Transparent
Shields: Braided covering 100%
O.F.C. tinned copper
Sheath: PVC
Sheath colours: Transparent

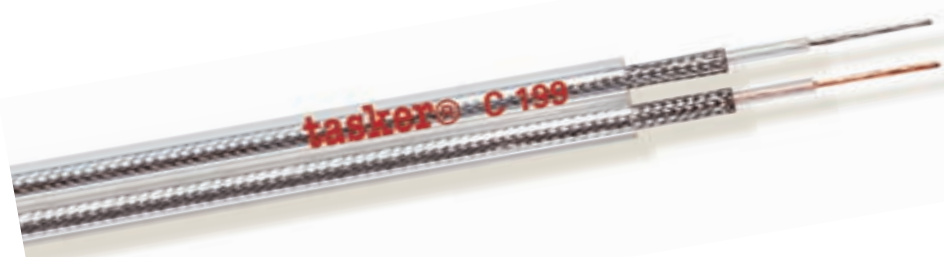

tasker® Code	Cond. number	Nominal section mm ²	Cond. Format. mm.	External Core Ø mm.	External Cable Dimension mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C199	2	2 x 0,25 (23 AWG)	8x0,20	1,6	5,0 x 10,3	100	B	6,0

Conductor Resistance Ω/Km ± 5%	Capacity Core/core pF/mt	Capacity Core/shield pF/mt
75	42	130
	Max rated Voltage AC - V	Operative Temperature °C
	49	-15 / +70