

Electro Mechanical Specifications

Nominal Chassis Diameter	15 inch/381 mm
Impedance	4,8 or 16 Ω ¹
Power Handling	600 (A.E.S.) ²
Maximum Output Continuous/Peak	121/127 dB
Power Compression at Rated Power	3.5 dB
Usable Frequency Range (-6 dB)	35 Hz-1 kHz
Average Sensitivity (in above range) 1 W/1 m	97 dB
Resonance	37 Hz
Moving Mass inc. Air Load	124 grams
BL Product (Newtons/amp)	27.3
Minimum Impedance (Zmin)	7.3 Ω
Effective Piston Diameter	12.71 inch/323 mm
Flux Density	1.0 Tesla
Magnetic Gap Depth	0.39 inch/10 mm
Coil Winding Height	0.87 inch/22 mm
Voice Coil Length	115 feet/35 m
Magnet Weight	120 oz/3.4 kg
Maximum Cone Displacement	0.55 inch/14 mm
Peak Displacement Volume of Cone, Vd	1.2 litres
Voice Coil Diameter	4.0 inch/101.6 mm

Thiele & Small Parameters

Resonant Frequency fs	37 Hz
D.C Resistance Re	5.85 Ω
Qts	0.218
Qes	0.228
Qms	5.09
Mms (grams)	124
Cms (microns per Newton)	147
BL Product	27.35 Tesla metres
Vas	139 litres
Reference Efficiency no	3.08 %
Piston Area Sd	0.082 m ²
Xmax	7.2 mm

Mounting Information

Overall Diameter	16"/406.4 mm
Width Across Flats	15.25"/387.4 mm
Flange Thickness	0.305"/7.8 mm
Baffle Hole Diameter, Front Mount	13.84"/351.7 mm
Baffle Hole Diameter, Rear Mount	14"/355.6 mm
Gasket Supplied	Rear
Fixing Holes	8 x 7.1" diam on 370 PCD 4 x 5.5 mm diam on 393.7 PCD
Depth	7.25"/184 mm
Weight	28.5 lb/13.1 kg
Recommended Enclosure Volume	2.5-5.3 cu ft/70-150 litres
Volume Displaced by Driver	0.219 cu ft/6.2 litres
Shipping Weight	30 lb/14.6 kg
Packing Carton Dimensions	415 x 415 x 250 mm

Colossus 15XB


The Colossus 15XB is intended for use as a high-output sub-bass driver either singly or in multiway systems. The unit features a 4-inch voice coil immersed in a symmetric magnetic field and centralized by using two suspensions in a dual arrangement to maintain ultra linearity and stability at high excursions. The heavily ribbed straight-sided paper cone membrane is reinforced with high-strength composite fibres to resist deformation under extreme loads. The driver handles 600 Watts (A.E.S.) continuous and can cope with peaks in excess of 2400 Watts. This is due to advanced thermal management in the form of a vented die-cast chassis and motor system using an internal heatsink coupled to a large vaned heatsink mounted on the rear of the unit. These measures effectively remove heat from the voice coil resulting in extremely low-power compression. The Colossus 15XB is designed for use in 70 to 150 litre ported enclosures.



FANE

FANE INTERNATIONAL LTD.
Sovereign House
Gilcar Way
Wakefield Europort
Castleford WF10 5QS
England
TEL +44 (0) 1924 224618
FAX +44 (0) 1924 899166
info@fane-international.com
www.fane-international.com

Frequency Response Data

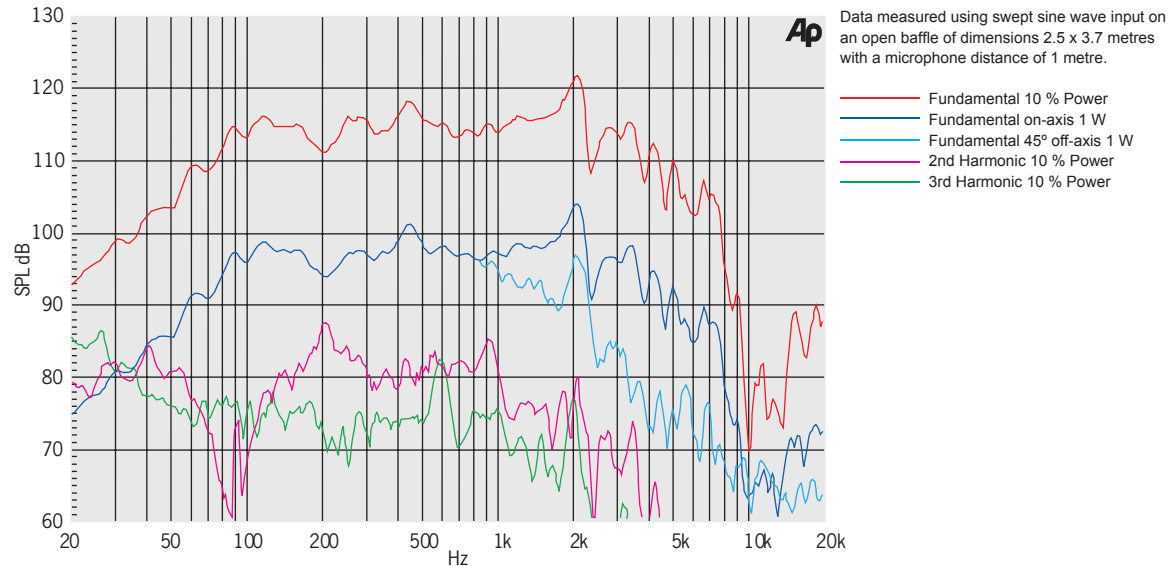


¹ Please inquire about alternative impedances.


² A.E.S. power handling test. Pink noise bandpass filtered at 12 db per octave with cutoff frequencies of 35 Hz and 350 Hz. Driver mounted in free air, test signal applied at rated power for two hours.

Materials of Construction


Coil Former	Fibreglass
Voice Coil	Copper
Magnet Material	Ferrite
Chassis	Die-cast Aluminium
Cone	Paper
Surround/Edge Termination	Polyvinyl Damped Fabric
Dust Dome	Paper
Connectors	Push-button Spring Terminals
Polarity	Positive Voltage at Red Terminal Causes Forward Motion of Cone

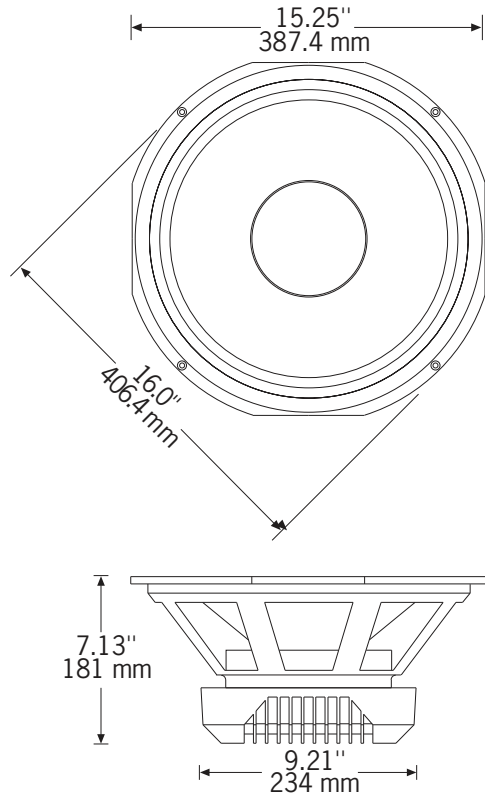

Impedance

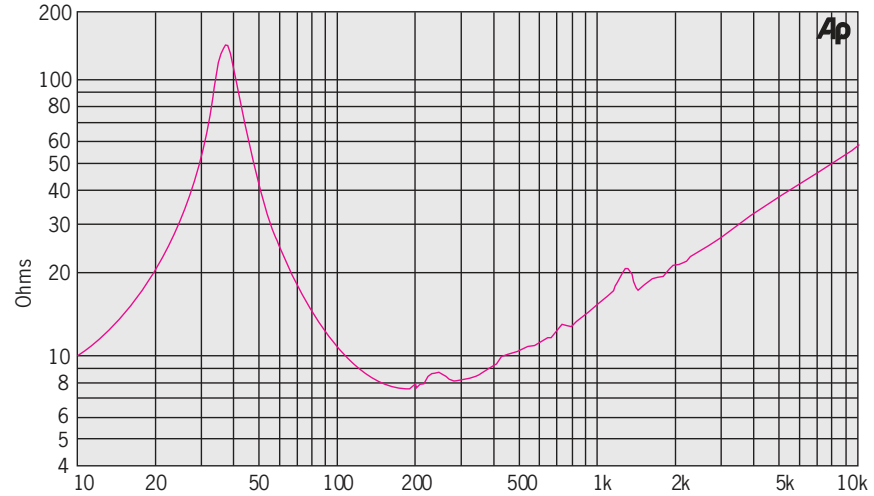

Computer Predicted Bass Response

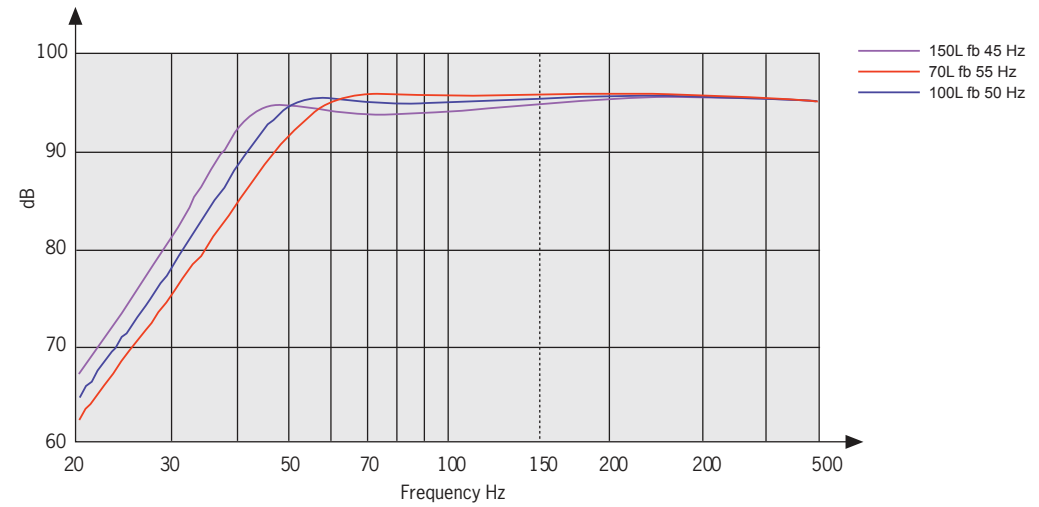

Colossus 15XB

Fane International Ltd. operates a policy of continuous product development and reserves the right to change specifications without notice.

