

Specification

| | |
|---------------------------|----------------|
| Nominal Basket Diameter | 15", 381mm |
| Nominal Impedance* | 8 ohms |
| Power Rating** | 450W |
| Resonance | 33Hz |
| Usable Frequency Range*** | 52Hz-2.3kHz |
| Sensitivity | 100.5 |
| Magnet Weight | 80 oz. |
| Gap Height | 0.375", 9.53mm |
| Voice Coil Diameter | 3", 76.2mm |

Thiele & Small Parameters

| | |
|---|------------------------------|
| Resonant Frequency (fs) | 33Hz |
| DC Resistance (Re) | 5.22 |
| Coil Inductance (Le) | 1.05mH |
| Mechanical Q (Qms) | 8.90 |
| Electromagnetic Q (Qes) | 0.33 |
| Total Q (Qts) | 0.32 |
| Compliance Equivalent Volume (Vas) | 321.3 liters / 11.35 cu. ft. |
| Peak Diaphragm Displacement Volume (Vd) | 343cc |
| Mechanical Compliance of Suspension (Cms) | 0.31mm/N |
| BL Product (BL) | 15.7 T-M |
| Diaphragm Mass inc. Airload (Mms) | 76 grams |
| Efficiency Bandwidth Product (EBP) | 98 |
| Maximum Linear Excursion (Xmax) | 4.0mm |
| Surface Area of Cone (Sd) | 856.3 cm ² |
| Maximum Mechanical Limit (Xlim) | 11.6mm |

Mounting Information

| | |
|------------------------------|----------------------------|
| Recommended Enclosure Volume | |
| Vented | 45-113 liters/1.6-4 cu.ft. |
| Overall Diameter | 15.16", 384.9mm |
| Baffle Hole Diameter | 13.77", 349.6mm |
| Front Sealing Gasket | fitted as standard |
| Rear Sealing Gasket | fitted as standard |
| Mounting Holes Diameter | 0.25", 6.4mm |
| Mounting Holes B.C.D. | 14.56", 369.9mm |
| Depth | 6.13", 156mm |
| Net Weight | 17.6 lbs., 8 kg |
| Shipping Weight | 19.8 lbs., 9 kg |


Materials of Construction

Copper voice coil
Polyimide former
Ferrite magnet
Vented core
Pressed steel basket
Paper Cone
Cloth cone edge
Solid composition paper dust cap



KAPPA-15A American Standard Series

Recommended for professional audio in a vented mid-bass or bass enclosure. Also suitable for bass guitar.

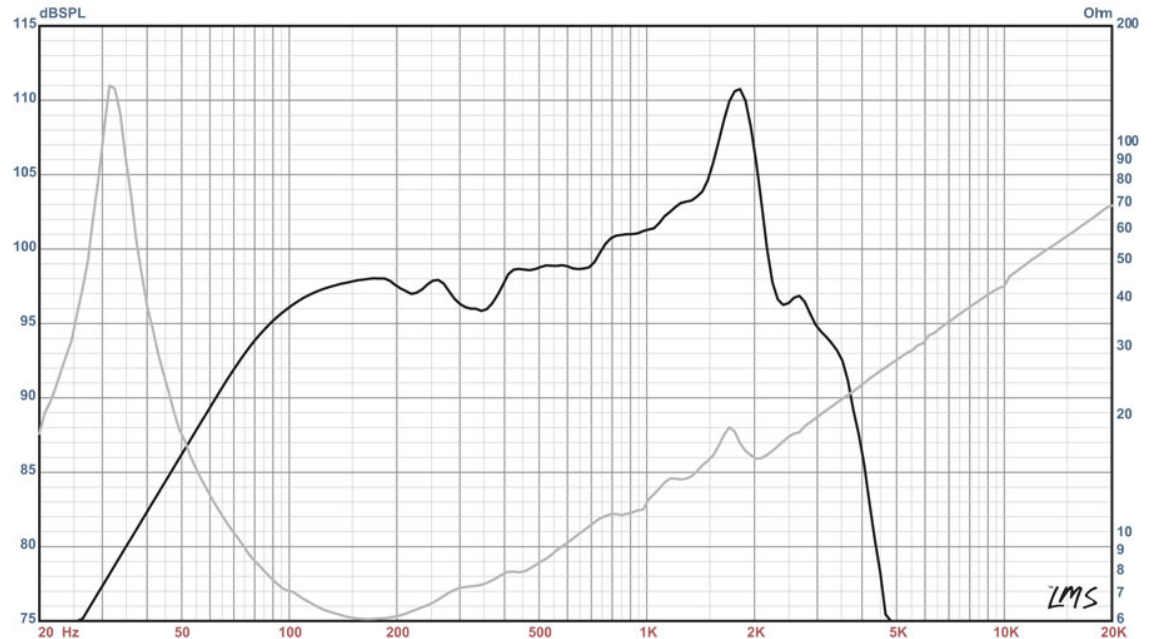

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)