


# 60X10W LED WASH LIGHT



**CE RoHS**

**Notice:** because the policy of improve the products quality of our company. Maybe some data in the instructions will change in future. By that time, we won't inform you about the changed matters. Our reserve the right of changing correlative specification when improve the products. Publisher of the instruction will not responsible for veracity of information and some correlative results caused by this information.

## **1. Operate**

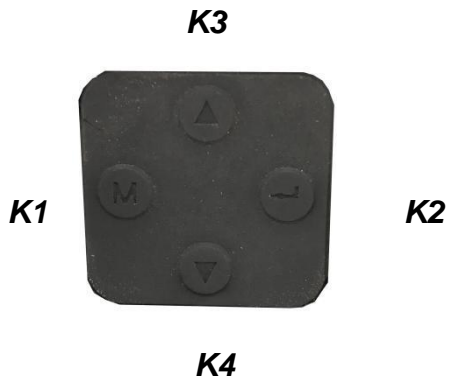

K1 is Menu, K2 Enter and Back, K3 up, K4 down.

## **2. Menu**

Menu			Description
DMX	DMX address		1) K 1 choose; 2) K3&K4 setting dmx address; 3) K1 save,K2 back
	Channel model	4CH 6CH 9CH	1) K1choose; 2) K3&K4 setting channel model; 3) K1 save,K2 back
Manual	1.Dimmer 2.Strobe 3.Red 4.Green 5.Blue 6.White		1) K1choose; 2) K3&K4 setting value; 3) K1 save,K2 back.
Macro	1.Run model	STOP Flash Fade Pulse	1) K1choose; 2) K3&K4 setting run model; 3) K1 save,K2 back
	2. Speed	0-255	1) K1choose; 2) K3&K4 setting speed; 3) K1 save,K2 back
System	Language	中文	1) K1choose; 2) K3&K4 choose language; 3) K1 save,K2 back
		English	
	Backlight setting	Auto Keep On	1) K1choose; 2) K3&K4 setting; 3) K1 save,K2 back

	Curve	Curve 1	1) K1choose; 2) K3&K4 choose Curve; 3) K1 save,K2 back
		Curve 2	
Curve 3			
Curve 4			
	Blackout Time(ms)	0-200	1) K1choose; 2) K3&K4 setting blackout time; 3) K1 save,K2 back <b>Notice:Suggest Value 50-150</b>
Frequency		1.2K 2.10K	1) K1choose; 2) K3&K4 setting Frequency; 3) K1 save,K2 back
Information	Device TOU(Min)		1) K1 to check device using time; 2) K2 back。
	About		Soft Version: 1.0.1

### **3.DMX Protocol**

Channel Model			Value	Description
4CH	5CH	9CH		
	1	1		Dimmer
			0-255	Dark->Bright
	2	2		Strobe
			0-3	Close
			4-255	Strobe: slow->fast
1	3	3		R
			0-255	Dark->Bright
2	4	4		G
			0-255	Dark->Bright
3	5	5		B
			0-255	Dark->Bright
4	6	6		W
			0-255	Dark->Bright
				Color List
			0-31	Close
			32-63	R
			64-95	G
		7	96-127	B
			128-159	W
			160-191	R+G
			192-223	R+B
			224-255	G+B
				MACRO
		8	0-100	Close

			101-150	Color Jump
			151-200	Color Fade
			200-255	Color Pulse
		9		Speed
			0-255	Speed: slow->fast

#### **4.Parameter:**

Input voltage: AC100–240 V, 50/60 Hz

Power: 600W

Light source: 60pcs 10W led, RGBW 4in1 mixing color

Working lifetime: About 50000 hours

IP rating: IP65

Working temperature:-20℃-50℃

Control mode: DMX 512, Auto, Master-slave, Sound

3Channel mode: 4/5/9CH

Dimmer: 0~100% linear dimming

Cooling system: Natural convection heat transfer+Waterproof cooling fan

Display panel: Blue LCD screen

Net weight: 15kg