


The Opti Tri White by Elation Professional is a high output LED color changer featuring full Tri Color White color mixing utilizing 54 x 3W LEDs - 18 Cool White, 18 Warm White, and 18 Amber running at 3W power each with a total unit power draw at full of 160 watts. Weighing 11lbs., the unit boasts a sturdy, high impact aluminum construction available in black casing. The Opti Tri White is fan cooled with the design of the fixture optimized to provide up to 50,000 hours estimated LED life. This unit is rated at IP 20, designed for indoor applications and multi voltage 100-240v AC with powercon in/out linking of up to 16pcs. This unit can be operated in stand alone mode, sound active mode or controlled via DMX controller. Control data input is via 3 pin XLR or 5pin DMX Neutrik™ serial first in and out connector cables. Heavy duty rigging yoke with integrated floor kick stand is included and optional safety cables and data cables are available. The Opti Tri White comes fitted with a standard 20° lens kit. Optional beam angles are available using our LSF filter series in the supplied gel frame as well as an optional Barn door can be added.

FEATURES

- Featuring new Tri White™ Technology
- 54 x 3W LED's
- Cool, Warm and Amber
- Powercon in/out
- 3 and 5pin DMX
- Dual yoke for floor mounting
- 100-240v switching power 47-63hz
- Flicker free operation
- ETL approved


TECHNICAL SPECIFICATIONS

- **DMX Channels:** 2 DMX Modes: 3 Channel Mode & 6 Channel Mode
- **Control:** 3 pin XLR or 5pin DMX Neutrik™ serial input/output
- **Power Supply:** 100V ~ 240V/47~63Hz
- **Power Consumption:** 160W max
- **Lamp:** 54 x 3W LED's (Tri White™ Technology: 18 cool white, 18 warm white and 18 amber)
- **Dimensions:** (LxWxH): 11" x 8.6" x 14" / 279 x 218 x 356 mm
- **Weight:** 11lbs./ 4.8Kgs.



PHOTOMETRIC DATA

CW	582 FC / 6260 LUX	142 FC / 1533 LUX	65 FC / 703 LUX	38 FC / 411 LUX	25 FC / 269 LUX
WW	286 FC / 3080 LUX	74 FC / 795 LUX	29 FC / 310 LUX	19 FC / 200 LUX	12 FC / 130 LUX
A	232 FC / 2501 LUX	58 FC / 621 LUX	26 FC / 278 LUX	17 FC / 178 LUX	10 FC / 107 LUX
ALL	1066 FC / 11470 LUX	255 FC / 2748 LUX	113 FC / 1215 LUX	59 FC / 640 LUX	42 FC / 450 LUX

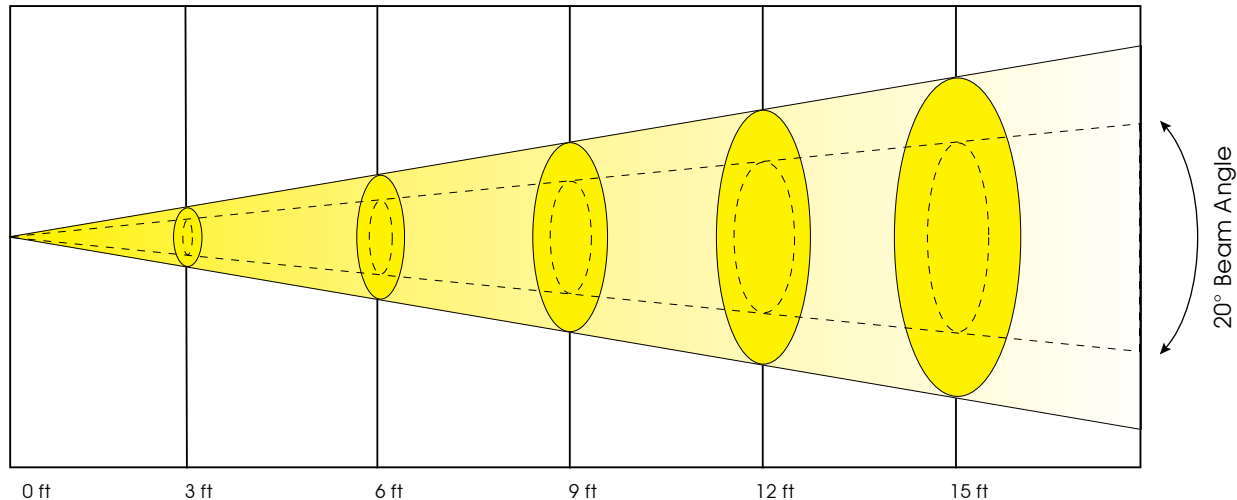




DMX TRAITS

3 Channel Mode:

Channel	Value	Function
1	0 - 255	Cool white 0% - 100%
2	0 - 255	Warm white 0% - 100%
3	0 - 255	Amber 0% - 100%

6 Channel Mode:

Channel	Value	Function
1	0 - 255	Cool white 0% - 100%
2	0 - 255	Warm white 0% - 100%
3	0 - 255	Amber 0% - 100%
4	0 - 255	Color macros
5	0 - 255	Stobing slow-fast
6	0 - 255	Master dimmer 0% - 100%

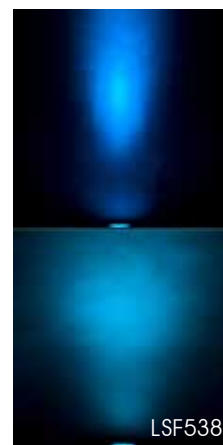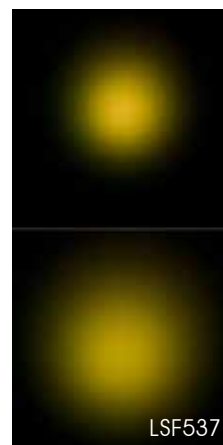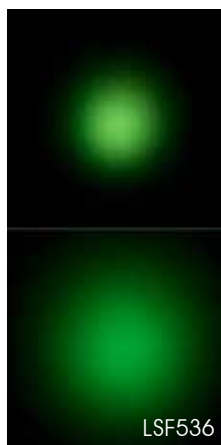

OPTIONAL ACCESSORIES - LSF Series Light Shaping Filters

Order Code	Description
LSF536	LSF30-24 - 30° 24" x 24" Sheet
LSF537	LSF20-22 - 20° 24" x 22" Sheet
LSF538	LSF601-24 - 60 x 1° 24" x 24" Sheet
LSF539	LSF10-24 - 10° 24" x 24" Sheet
OPTI-BDB	Barn Door Black
Pro Clamp	Hanging Bracket