



MSR 1200/2 1CT

Product family description
High- efficiency cold strike metal halide lamps designed for optimum light collection

Product Features

- Run- up time 2 minutes
- Restrike time 5 - 10 minutes, depending on cooling conditions

Product Benefits

- High luminous efficacy
- Compact arc (6 - 10 mm)
- Good colour rendering
- Dimmable with a stable colour temperature

- Studios and discos

Luminaires

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots


System

- Can be operated on an electronic power supply or a magnetic ballast- ignitor combination


Application

Product data	
Order code	200273 45
Full product code	871150020027345
Full product name	MSR 1200/2 1CT
Order product name	MSR 1200/2 1CT/4
Packing type	1 Carton
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500200273
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500200280
Logistic code(s) - 12NC	9281 718 05108
ILCOS code	
Net weight per piece	0.150 (KG)
Successor order code	
Technical Type	1200
Colour Code	2
System Description	Cold Strike
Packing Type	1CT [1 Carton]
Packing Configuration	4


Product data	
Cap- Base	G22
Cap- Base Information	30x53mm
Execution	-
Burning Position	any
Main Application	Studio/Disco
Additional Information	-
Life to 50% failures EM[hr]	800
Product Nett Weight[gr]	150
Rated Lamp Wattage[W]	1200
Technical Lamp Power[W]	1100
Lamp Current[A]	13.8
Colour Rendering Index[Ra8]	85
Colour Temperature[K]	7200
Lamp Luminous Flux EM[Lm]	110000
Lamp Luminous Efficacy EM[Lm/W]	85

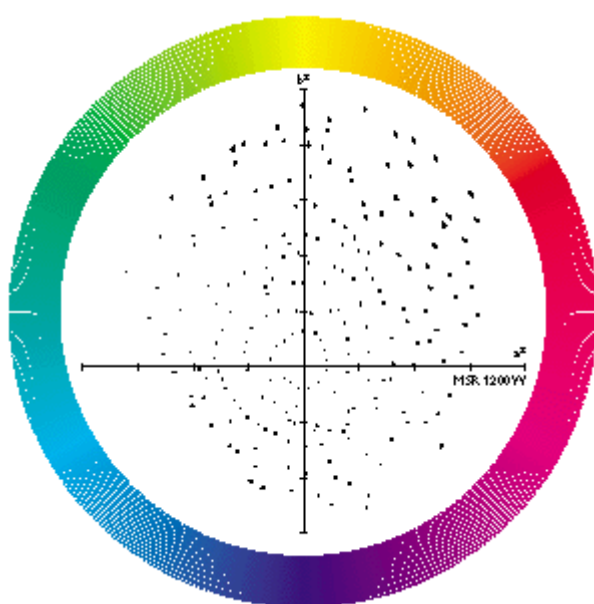

MSR 1200W

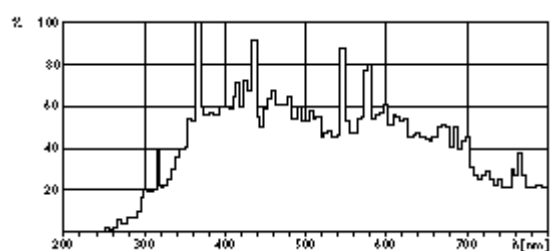

MSR CS

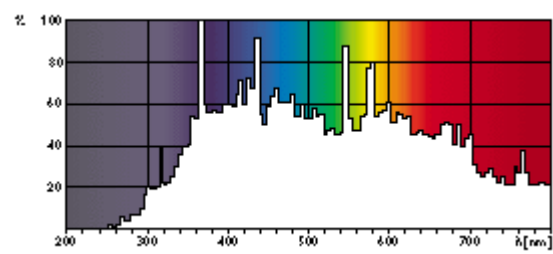

MSR CS

