



MSR 700/2 I CT

Product family description

MSR – bright vivid colors, alwaysThe high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product Features

- Single ended lamp concept
- High CRI
- Daylight Colour Temperatures

Product Benefits

- Optimal light collection
- Excellent colour characteristics
- Brightness on stage

Application

- Theatre stages
- Discos
- Events
- Shows

Luminaires

- Must only be operated in closed luminaires, because of the high internal working pressure
- Luminaires must block the emitted UV radiation, with no radiation spill through ventilation slots

System

- Can be operated on an electronic power supply or a magnetic ballast-ignitor combination



PHILIPS

Product data	
Order code	200297 45
Full product name	MSR 700/2 ICT
Packing type	1 Carton
Pieces per pack	1
Net weight per piece	0.120 KG
Successor order code	
System Description	Cold Strike
Cap-Base	G22
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Disco
Additional Information	-
Packing Type	ICT [1 Carton]
Packing Configuration	4
Life to 50% failures EM	1000 hr
Lamp Wattage	700W
Technical Type	700
Lamp Wattage Technical	700 W
Lamp Current	11 A
Color Code	2
Color Rendering Index	80 Ra8
Color Temperature	7200 K
Luminous Flux Lamp EM	55000 Lm
Luminous Efficacy Lamp EM	78 Lm/W





MSR 700 (/2), MSR 1200 (/2)

MSR 1200W/700W -

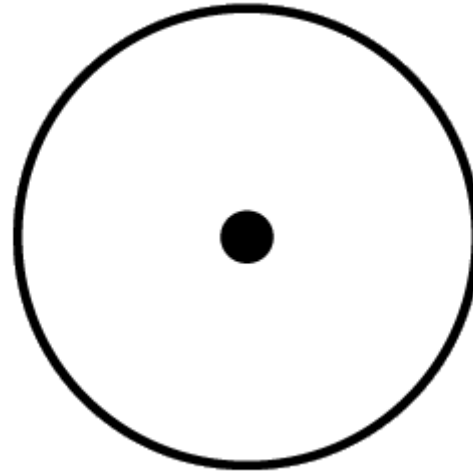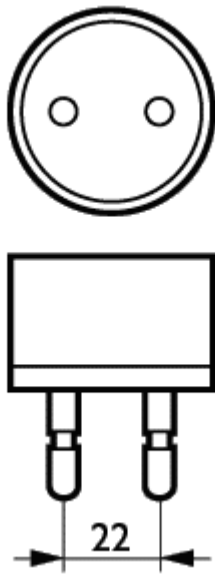


Cap-Base G22

Operating Position any

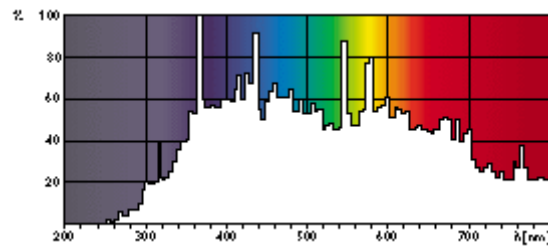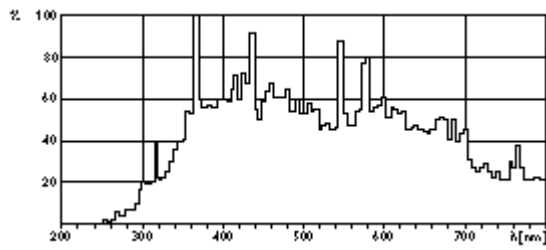

MSR CS

MSR CS

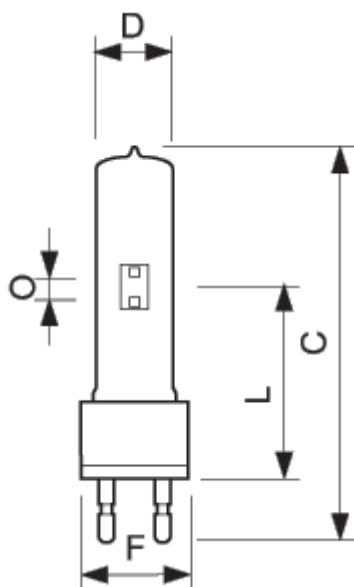

G22

MSR

	C	C	D	D	L	L
Full product name	Max	Max	Max	Max	Min	Min
MSR 700/2 ICT	152	152	30	30	74	74

	L	L	L	L	O	O
Full product name	Nom	Nom	Max	Max	Nom	Nom
MSR 700/2 ICT	75	75	76	76	8.0	8.0

Full product name
MSR 700/2 ICT



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000