

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	50.94	Hz
3	Re	6.07	Ohms[dc]
4	Res	119.48	Ohms
5	Qms	4.88	
6	Qes	0.25	
7	Qts	0.24	
8	L1	1.44	mH
9	L2	2.09	mH
10	R2	5.55	Ohms
11	RMSE-load	1.22	Ohms
12	Vas(Sd)	67.55	liters
13	Mms	61.75	grams
14	Cms	158	$\mu\text{M}/\text{Newton}$
15	B1	21.99	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.1% (-20% to -50% is recommended).

12PS76


MLSSA: Parameters

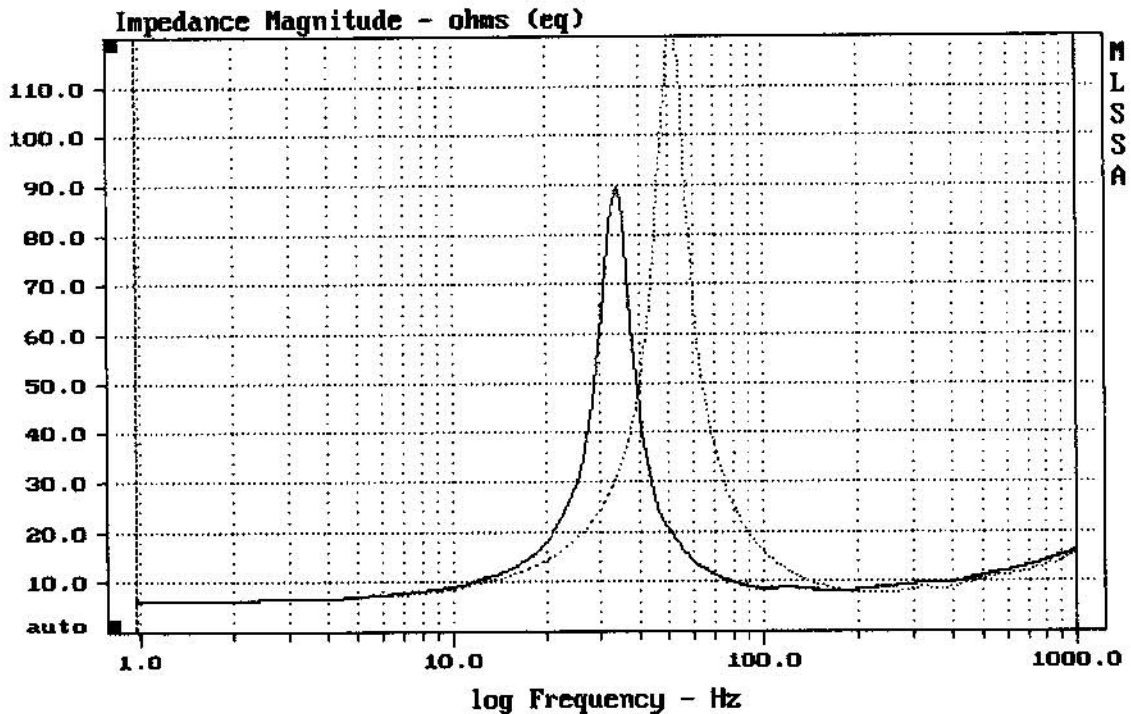

mean: 13.78, rms: 18.81, std: 12.81, max: 128.4, min: 6.131

DITO


MLSSA: Frequency Domain

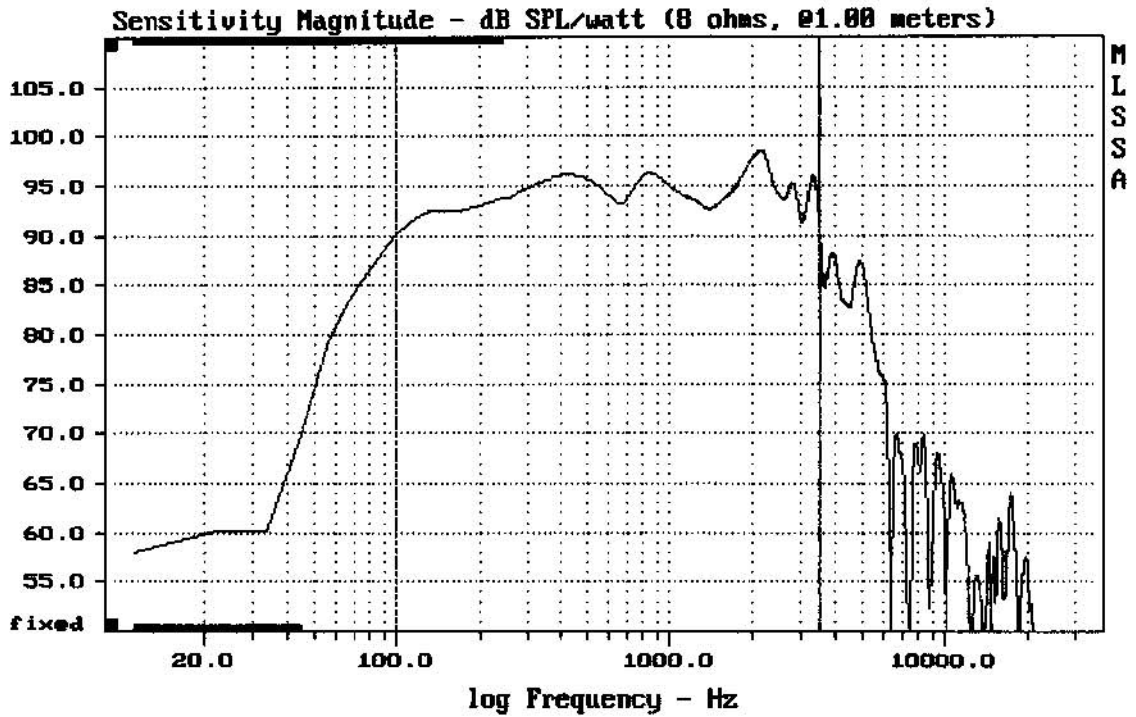

Level (100:3507 Hz) = 94.55 dB SPL/watt (8 ohms, @1.00 meters)

12PS76

MLSSA: Frequency Domain

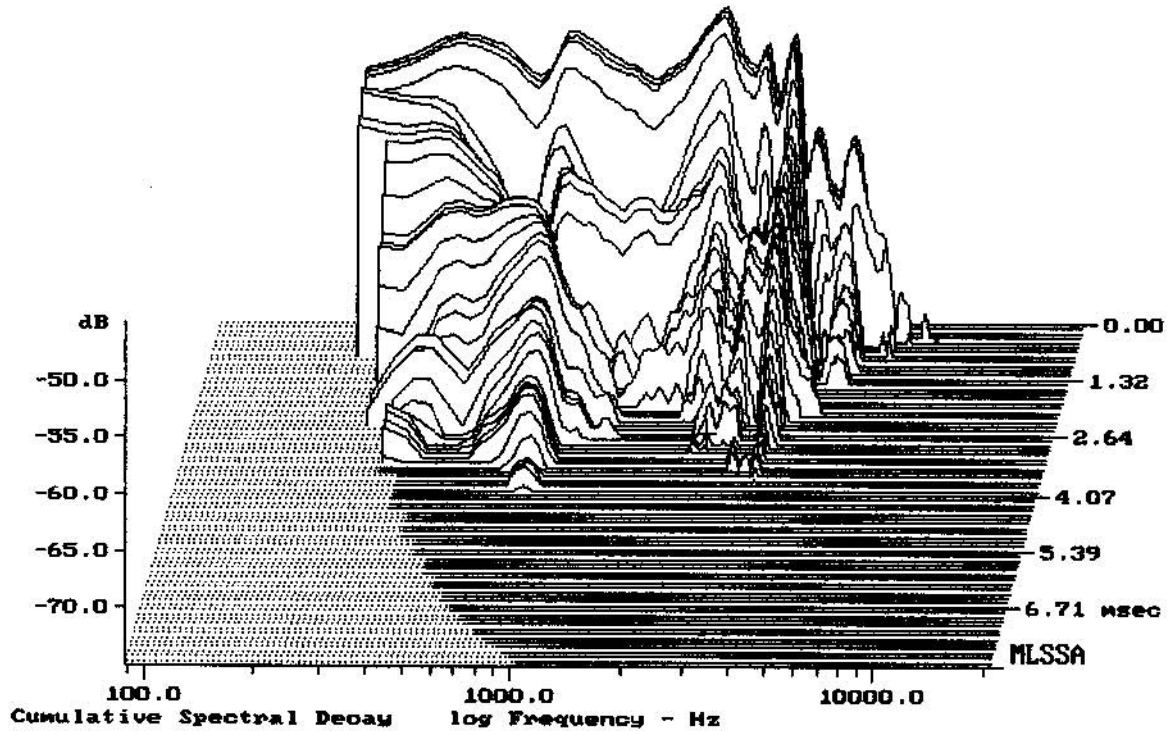

-74.02 dB, 2353 Hz (53), 2.860 msec (27)