

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	49.45	Hz
3	Re	5.22	Ohms[dc]
4	Res	104.43	Ohms
5	Qms	6.08	
6	Qes	0.30	
7	Qts	0.29	
8	L1	1.15	mH
9	L2	1.88	mH
10	R2	12.06	Ohms
11	RMSE-load	0.82	Ohms
12	Vas(Sd)	40.36	liters
13	Mms	101.63	grams
14	Cms	102	$\mu\text{M}/\text{Newton}$
15	B1	23.29	Tesla-M
16	SPLref(Sd)	93.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.3% (-20% to -50% is recommended).


12TBX100

MLSSA: Parameters

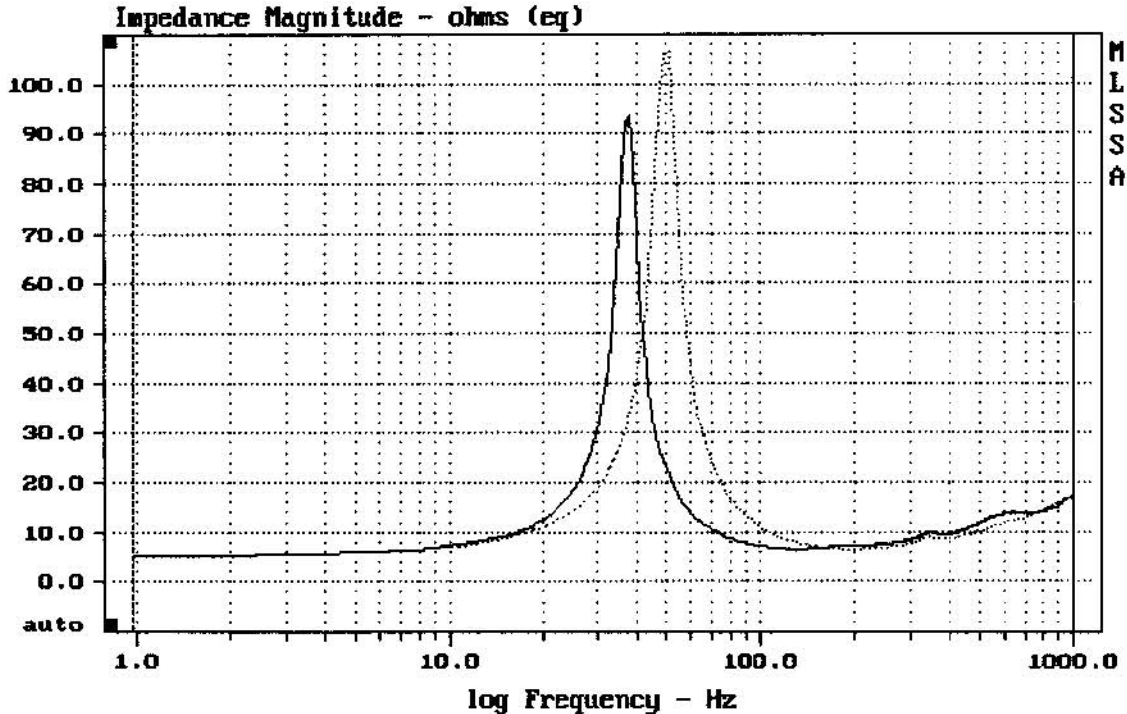

mean: 12.92, rms: 16.4, std: 18.11, max: 186.9, min: 5.284

MLSSA: Frequency Domain

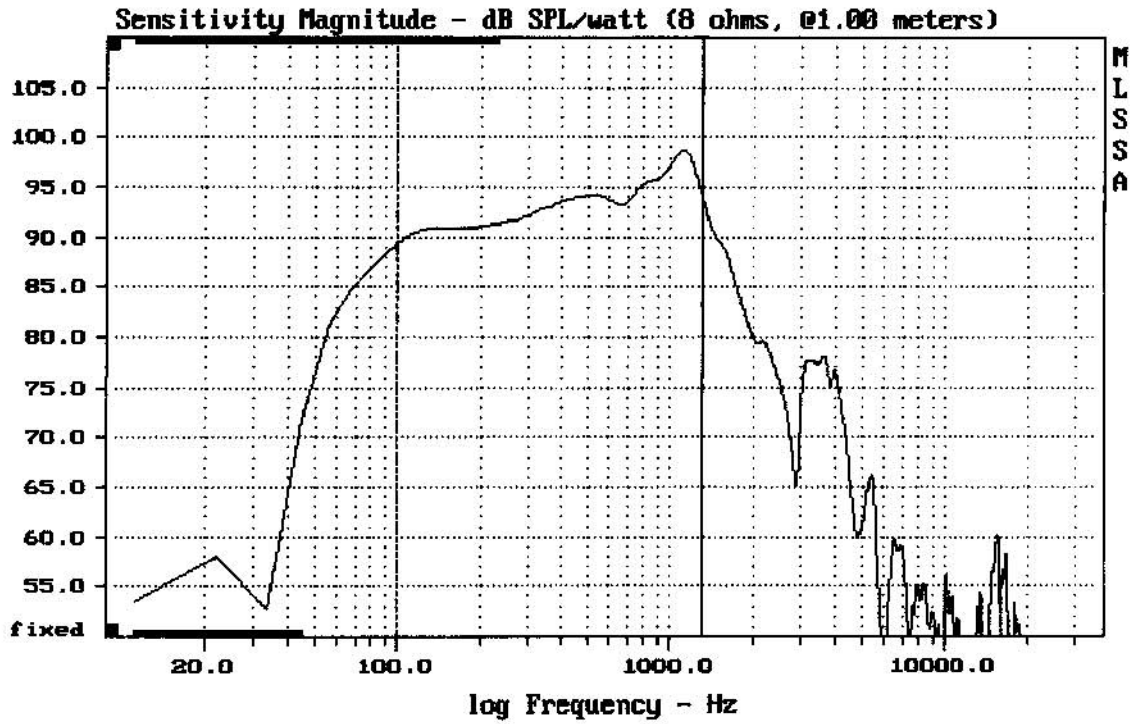



---

Level (100:1309 Hz) = 93.75 dB SPL/watt (8 ohms, @1.00 meters)

---

12TBX100

MLSSA: Frequency Domain

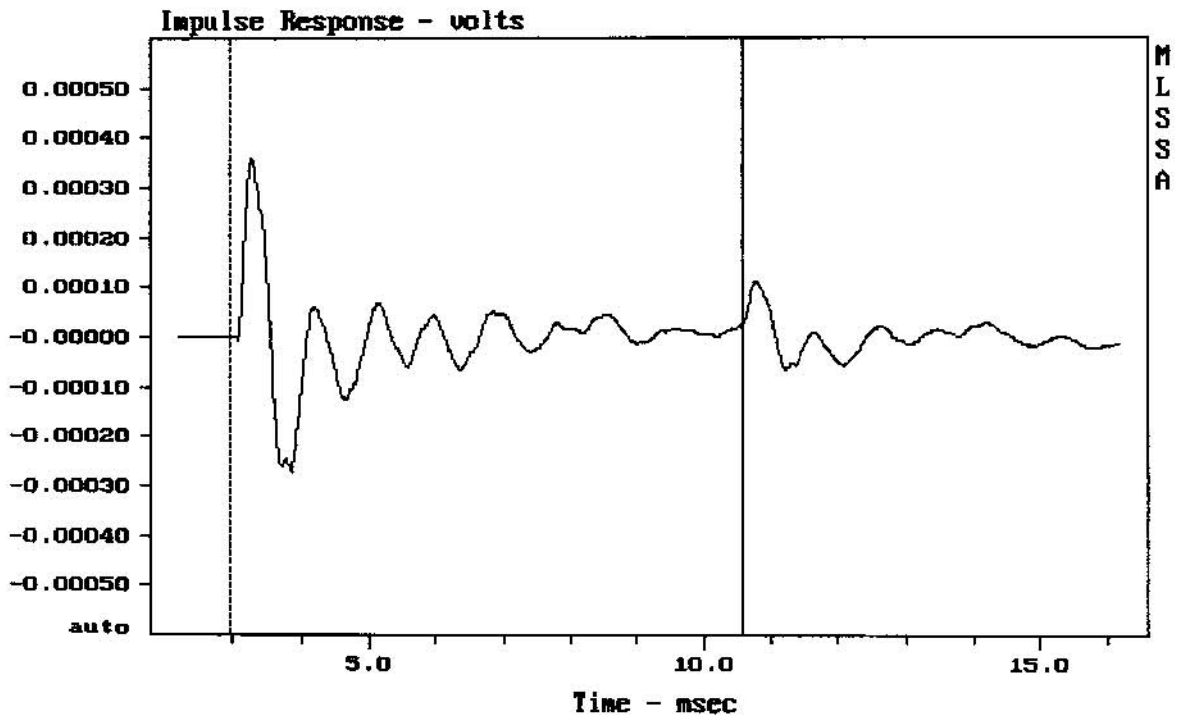


---

mean: 1.894e-006, rms: 8.774e-005, std: 8.774e-005, max: 0.0003572, min: -0.0003572

---

12TBX100