

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	37.92	Hz
3	Re	5.30	Ohms[dc]
4	Res	119.97	Ohms
5	Qms	5.56	
6	Qes	0.25	
7	Qts	0.24	
8	L1	1.30	mH
9	L2	1.82	mH
10	R2	6.83	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	148.41	liters
13	Mms	121.89	grams
14	Cms	145	$\mu\text{M}/\text{Newton}$
15	B1	25.03	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (100.00 grams)

Area (Sd): 855.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.2% (-20% to -50% is recommended).


15PL100

MLSSA: Parameters

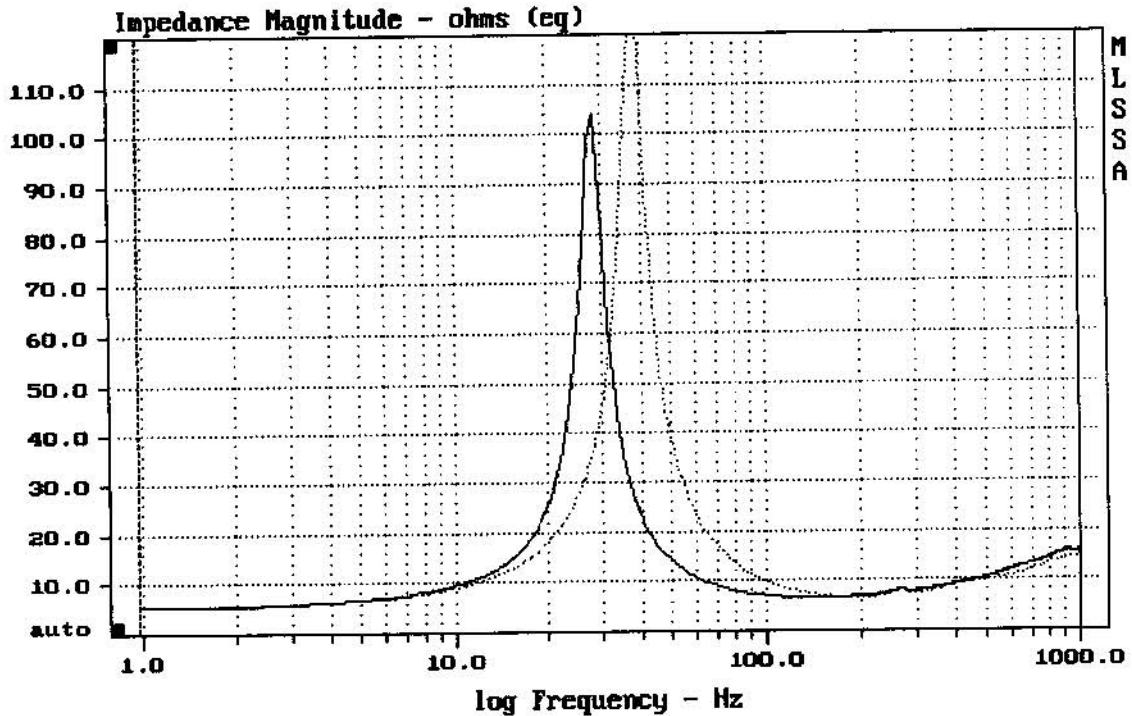

mean: 12.42, rms: 16.38, std: 10.68, max: 126, min: 5.353


MLSSA: Frequency Domain

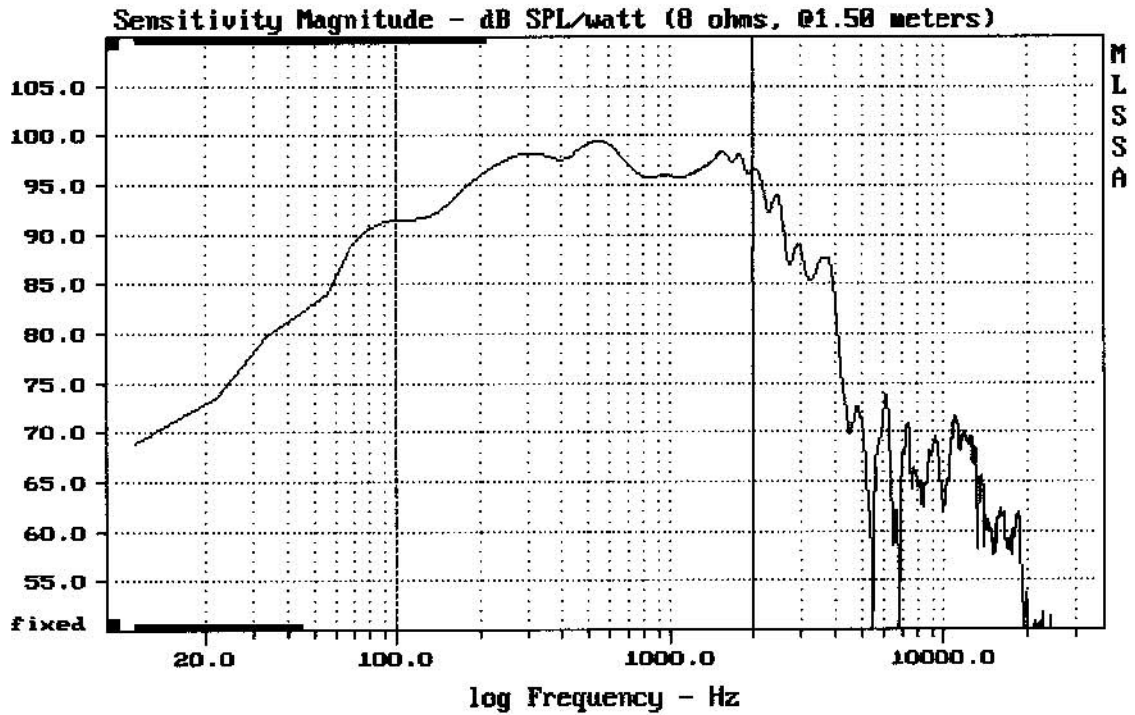

Level (100:1998 Hz) = 96.78 dB SPL/watt (8 ohms, @1.50 meters)

15PL100

MLSSA: Frequency Domain

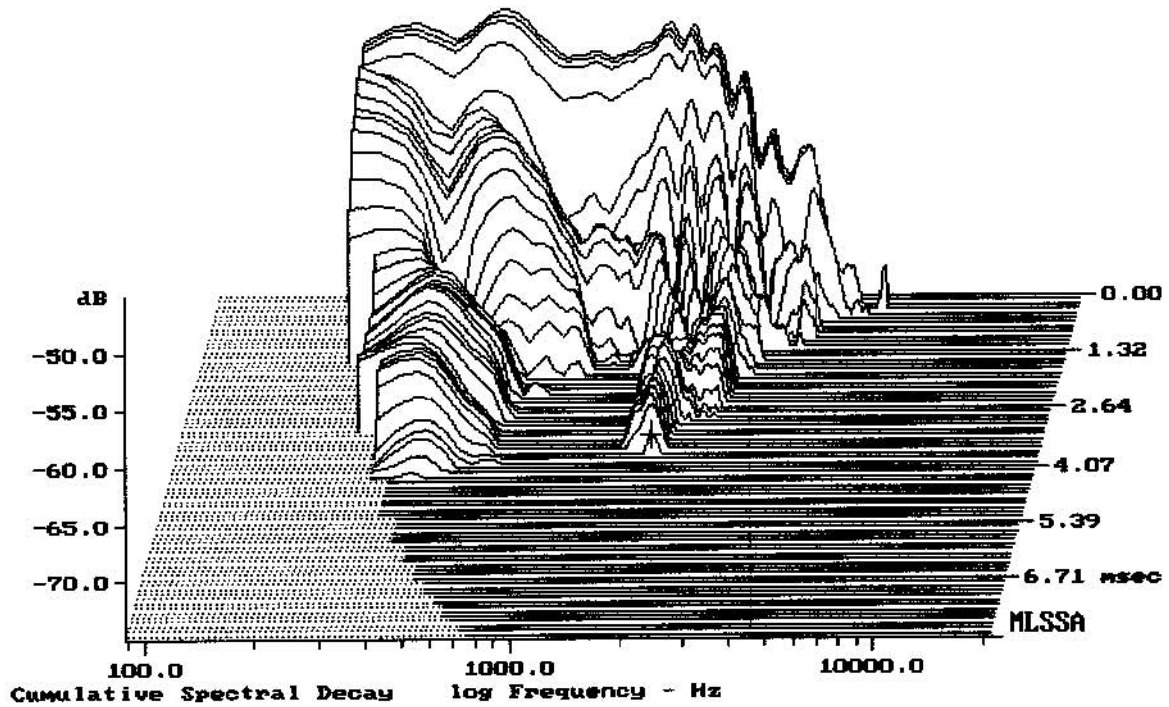

-73.36 dB, 1776 Hz (40), 3.740 msec (35)