

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	37.00	Hz
3	Re	5.33	Ohms[dc]
4	Res	103.87	Ohms
5	Qms	5.93	
6	Qes	0.30	
7	Qts	0.29	
8	L1	1.03	mH
9	L2	1.55	mH
10	R2	6.49	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	181.66	liters
13	Mms	104.56	grams
14	Cms	177	$\mu\text{M}/\text{Newton}$
15	B1	20.63	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.1% (-20% to -50% is recommended).


15PS76

MLSSA: Parameters

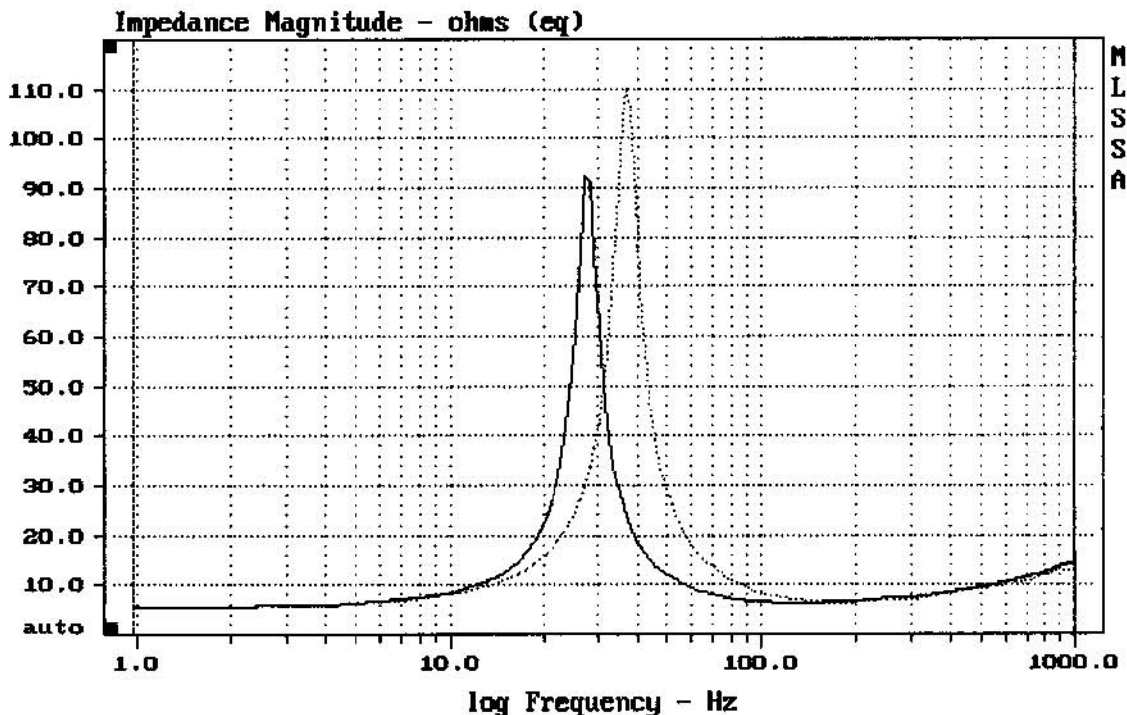

mean: 11.15, rms: 14.25, std: 8.872, max: 109.9, min: 5.391


MLSSA: Frequency Domain

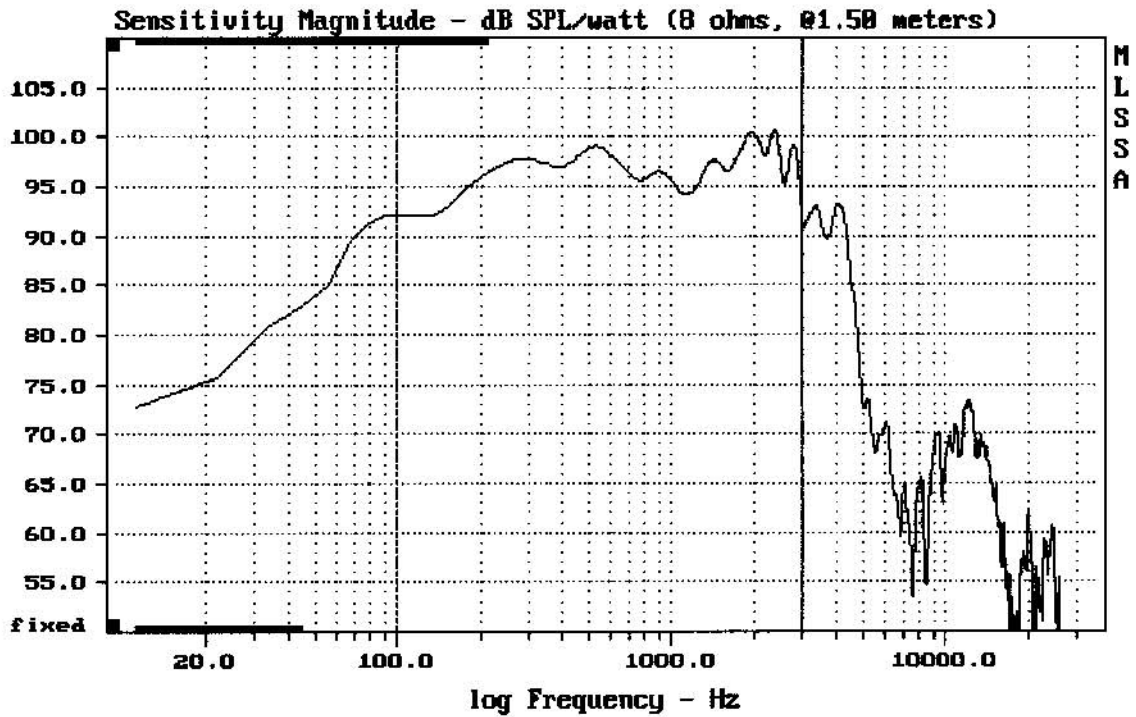

Level (100:3007 Hz) = 96.86 dB SPL/watt (8 ohms, 01.50 meters)

15PS76

MLSSA: Frequency Domain

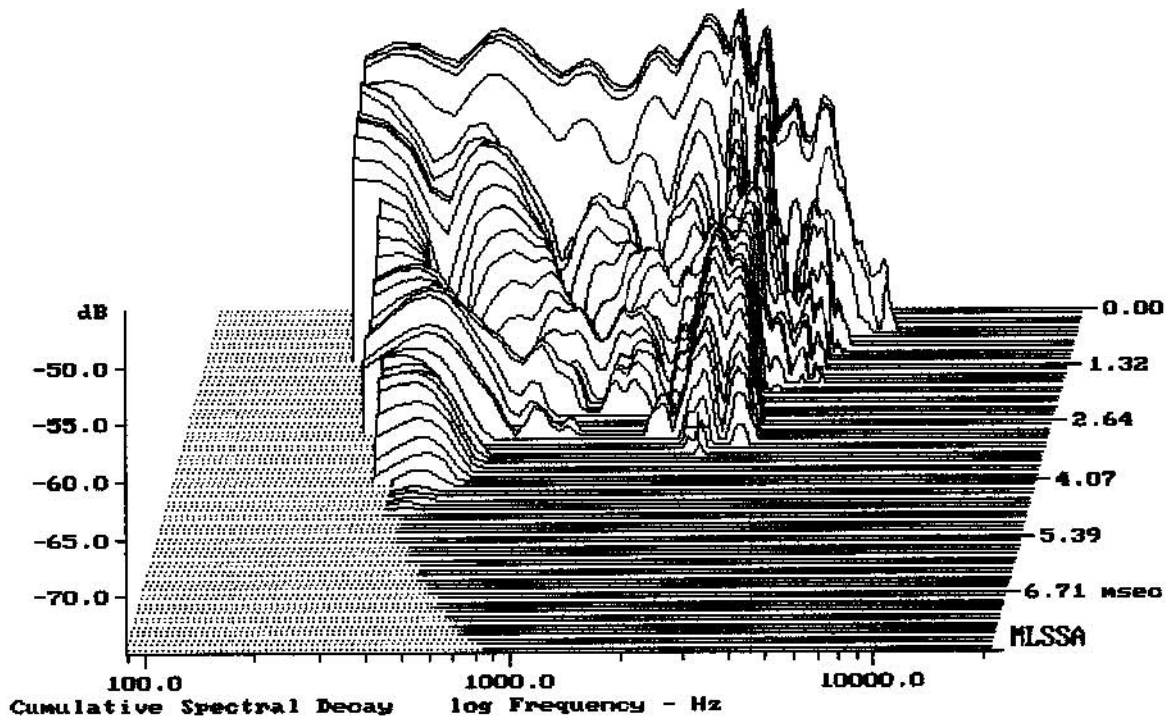

-73.15 dB, 2388 Hz (52), 3.300 msec (31)