


Level (67:3007 Hz) = 95.91 dB SPL/watt (4 ohms, @1.50 meters)

15W1A

MLSSA: Frequency Domain

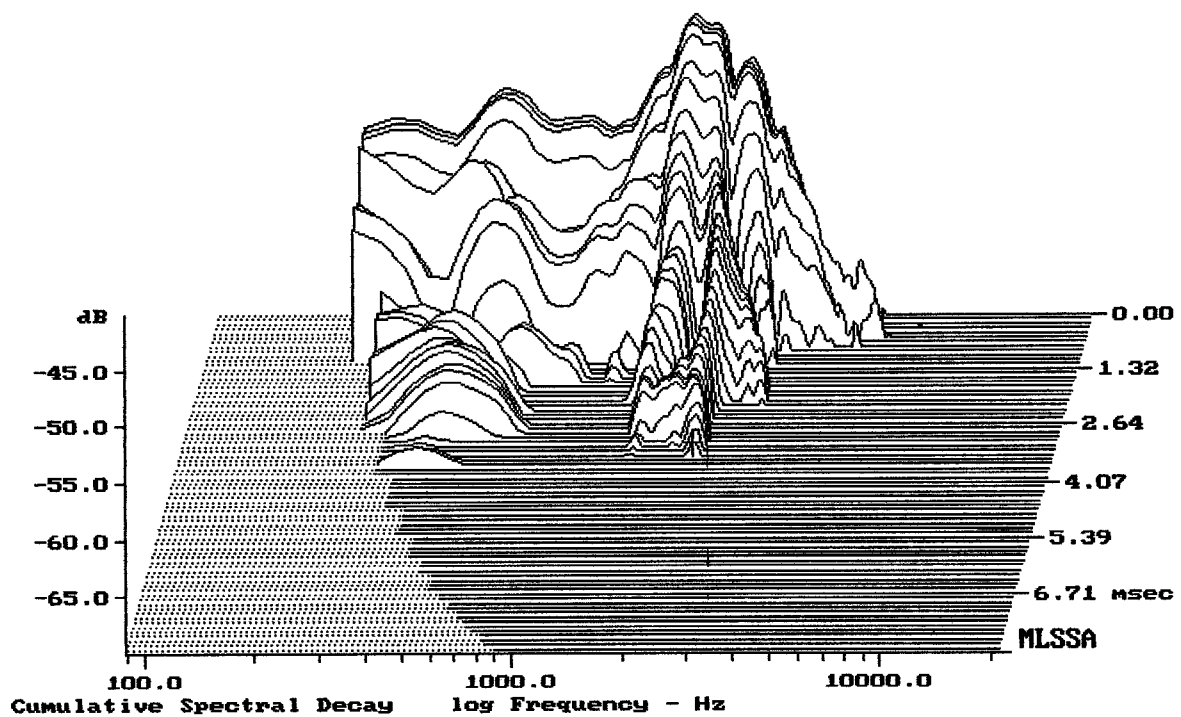

-68.89 dB, 2219 Hz (50), 3.410 msec (32)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	39.60	Hz
3	Re	3.35	Ohms[dc]
4	Res	61.36	Ohms
5	Qms	14.55	
6	Qes	0.79	
7	Qts	0.75	
8	L1	0.50	mH
9	L2	0.88	mH
10	R2	3.86	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	170.67	liters
13	Mms	91.50	grams
14	Cms	177	$\mu\text{M}/\text{Newton}$
15	Bl	9.80	Tesla-M
16	SPLref(Sd)	93.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.5% (-20% to -50% is recommended).

15W1A

MLSSA: Parameters

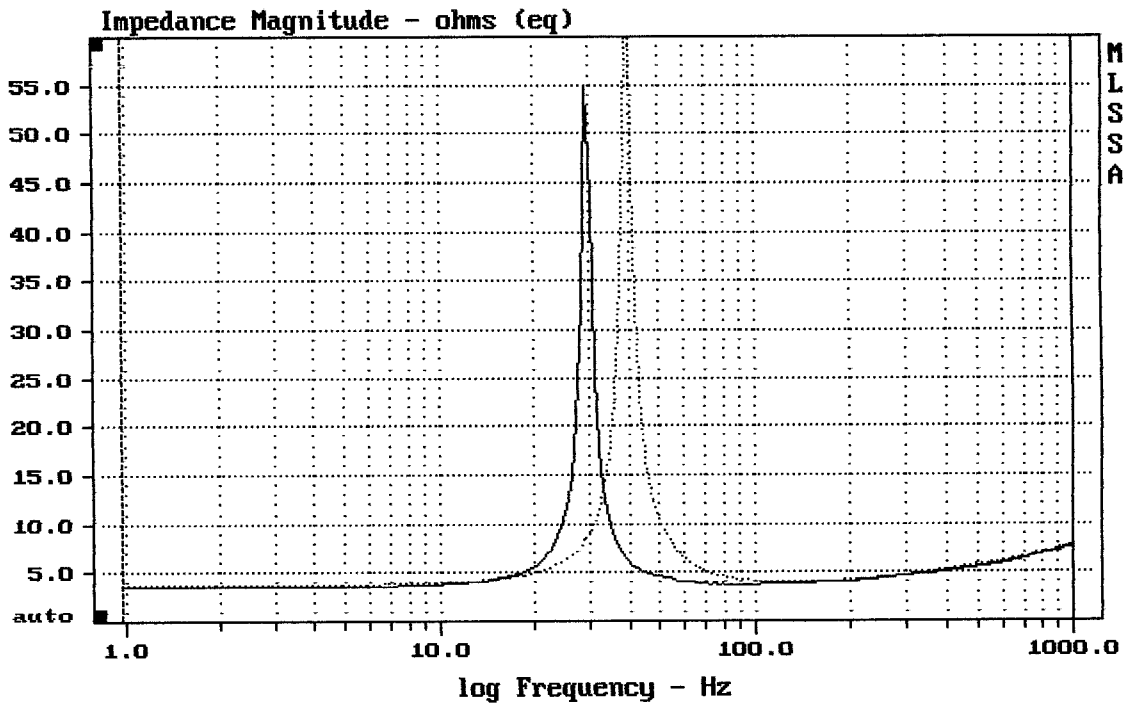

mean: 6.221, rms: 7.192, std: 3.609, max: 63.38, min: 3.636

MLSSA: Frequency Domain