


Level (100:3507 Hz) = 95.85 dB SPL/watt (4 ohms, @1.00 meters)

12PLB76/4

MLSSA: Frequency Domain

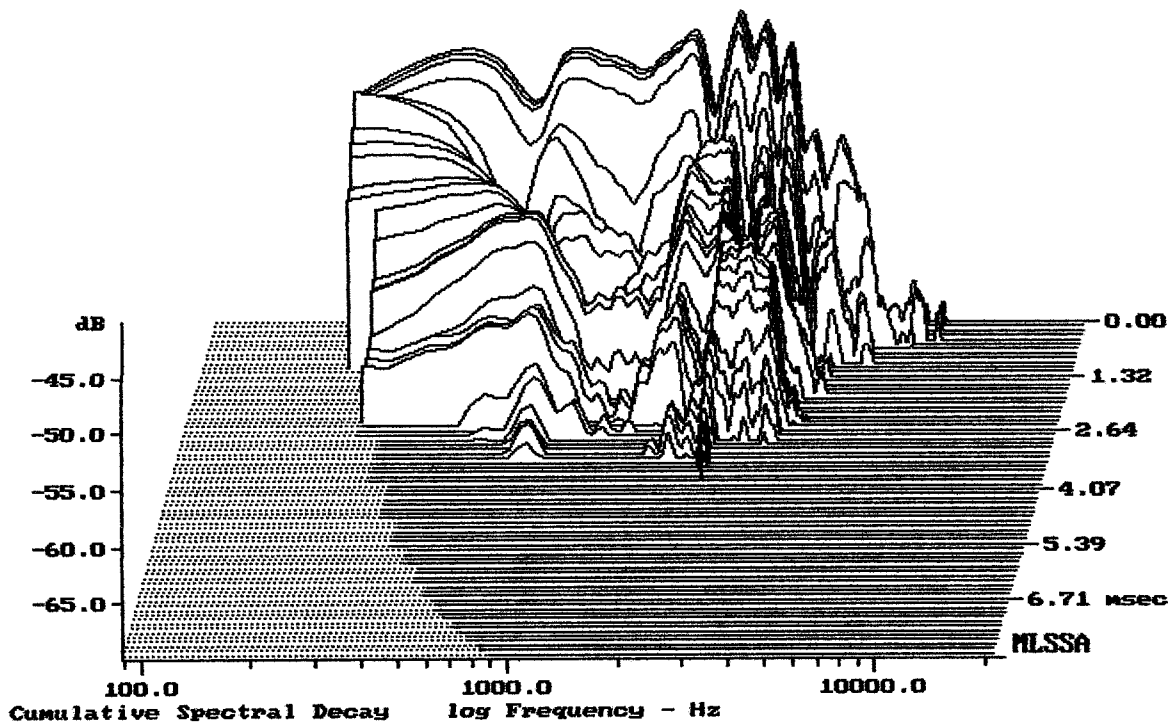

-69.52 dB, 2441 Hz (55), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	48.63	Hz
3	Re	3.70	Ohms[dc]
4	Res	130.16	Ohms
5	Qms	8.73	
6	Qes	0.25	
7	Qts	0.24	
8	L1	0.67	mH
9	L2	1.03	mH
10	R2	3.11	Ohms
11	RMSE-load	0.21	Ohms
12	Vas(Sd)	86.72	liters
13	Mms	48.89	grams
14	Cms	219	$\mu\text{M}/\text{Newton}$
15	B1	14.92	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.2% (-20% to -50% is recommended).

12PLB76/4

MLSSA: Parameters

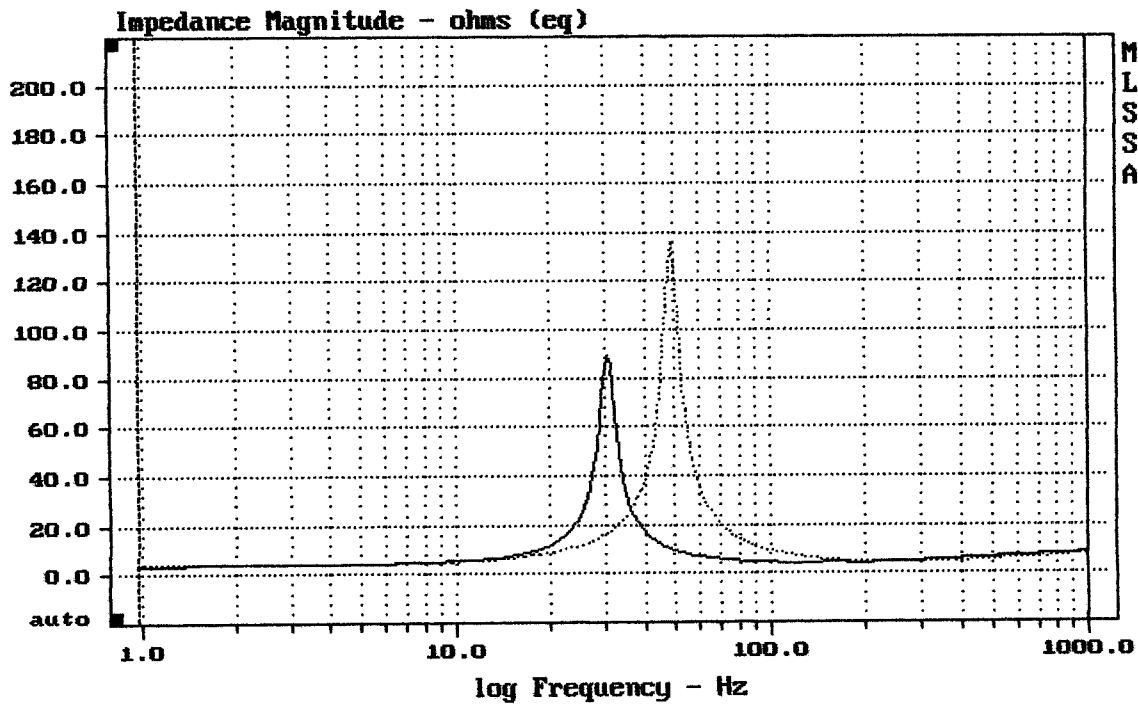

mean: 8.285, rms: 13.68, std: 18.88, max: 136, min: 3.792

MLSSA: Frequency Domain