


Level (200:8001 Hz) = 97.17 dB SPL/watt (16 ohms, @1.00 meters)

6MD38/16

MLSSA: Frequency Domain

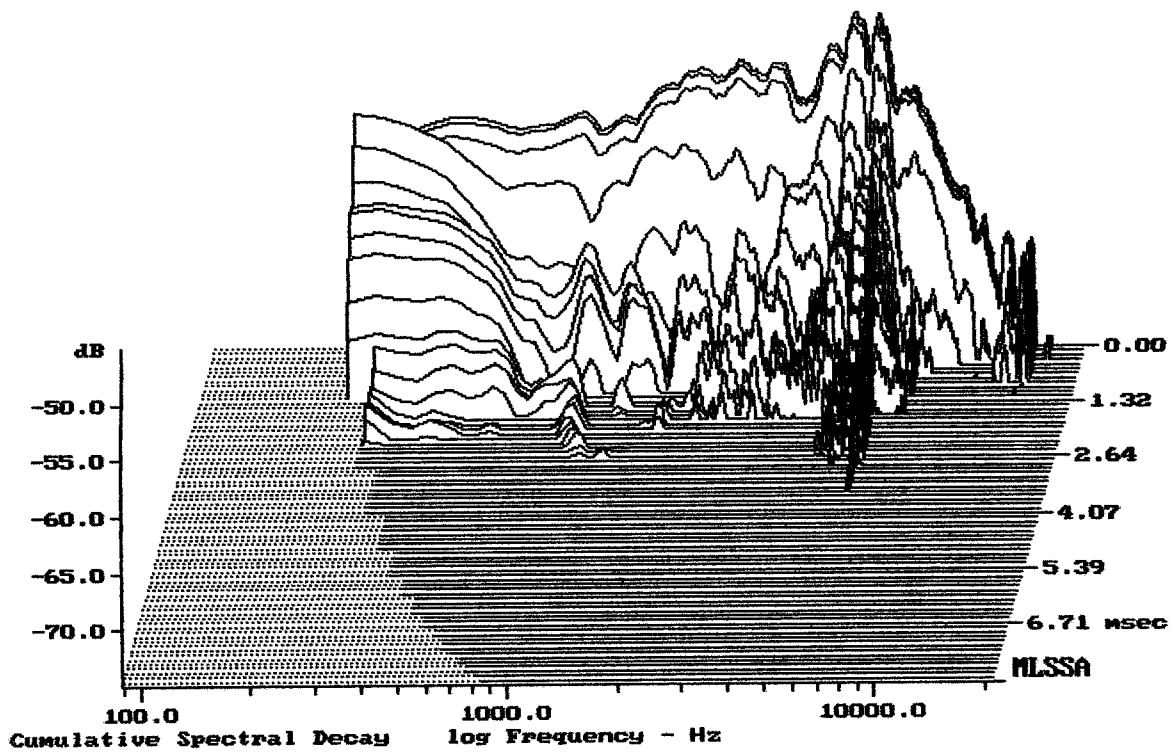

-74.27 dB, 6001 Hz (137), 3.410 msec (32)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.03	Ohms
2	Fs	160.60	Hz
3	Re	11.70	Ohms[dc]
4	Res	88.45	Ohms
5	Qms	5.19	
6	Qes	0.69	
7	Qts	0.61	
8	L1	0.50	mH
9	L2	0.91	mH
10	R2	3.72	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	3.36	liters
13	Mms	8.04	grams
14	Cms	122	$\mu\text{M}/\text{Newton}$
15	B1	11.75	Tesla-M
16	SPLref(Sd)	94.9	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (10.00 grams)

Area (Sd): 140.00 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).

6MD38/16

MLSSA: Parameters

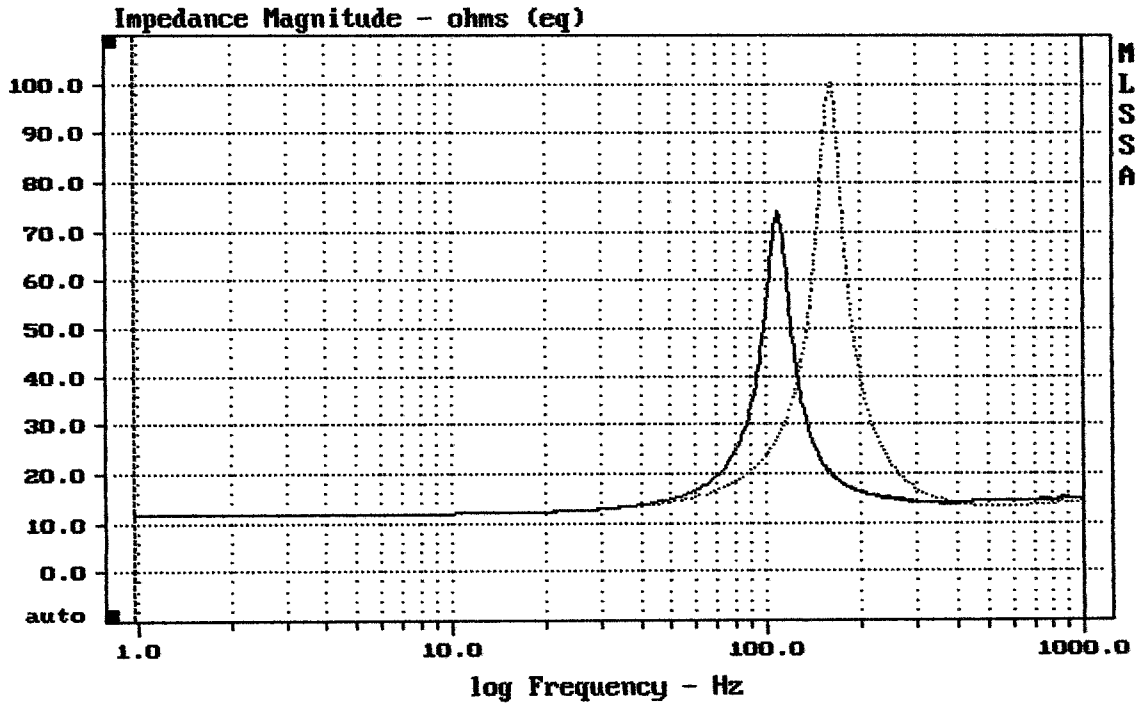

mean: 19.42, rms: 24.65, std: 15.18, max: 100.4, min: 11.78

MLSSA: Frequency Domain