


Level (100:1909 Hz) = 95.75 dB SPL/watt (8 ohms, @1.50 meters)

15NBX100

MLSSA: Frequency Domain

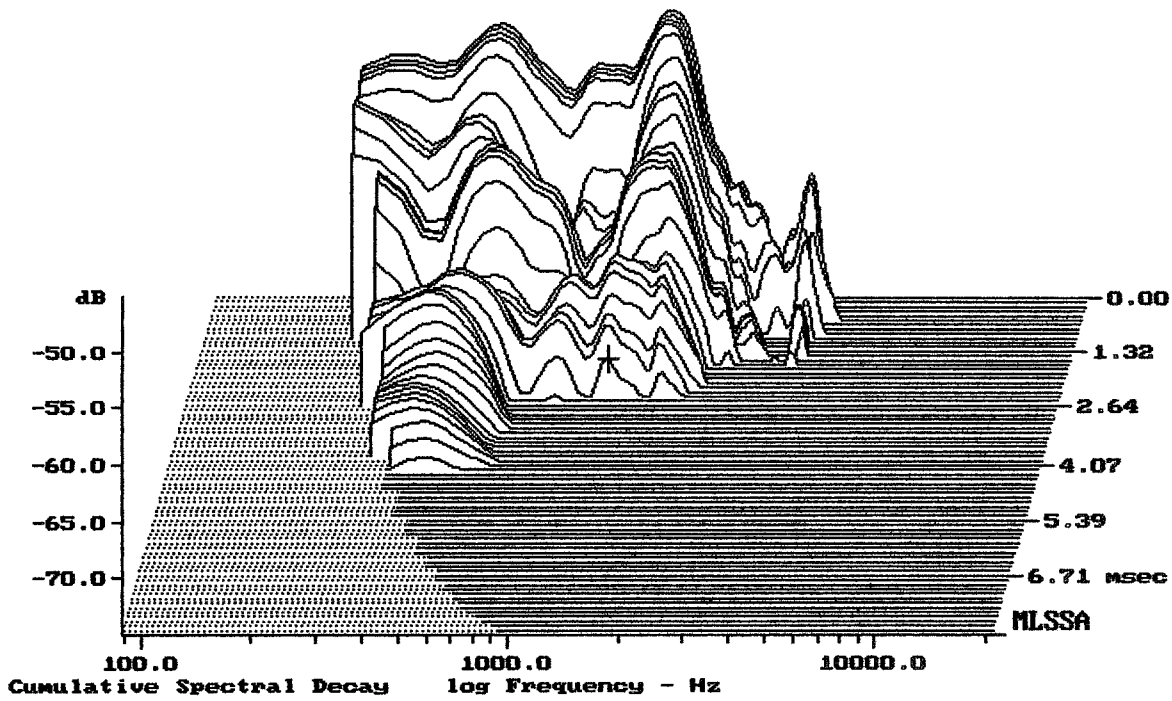

-71.66 dB, 1243 Hz (28), 2.420 msec (23)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	38.61	Hz
3	Re	5.11	Ohms[dc]
4	Res	98.82	Ohms
5	Qms	6.30	
6	Qes	0.33	
7	Qts	0.31	
8	L1	1.28	mH
9	L2	1.64	mH
10	R2	8.36	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	125.37	liters
13	Mms	147.85	grams
14	Cms	115	$\mu\text{M}/\text{Newton}$
15	B1	23.72	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.17 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).

15NBX100

MLSSA: Parameters

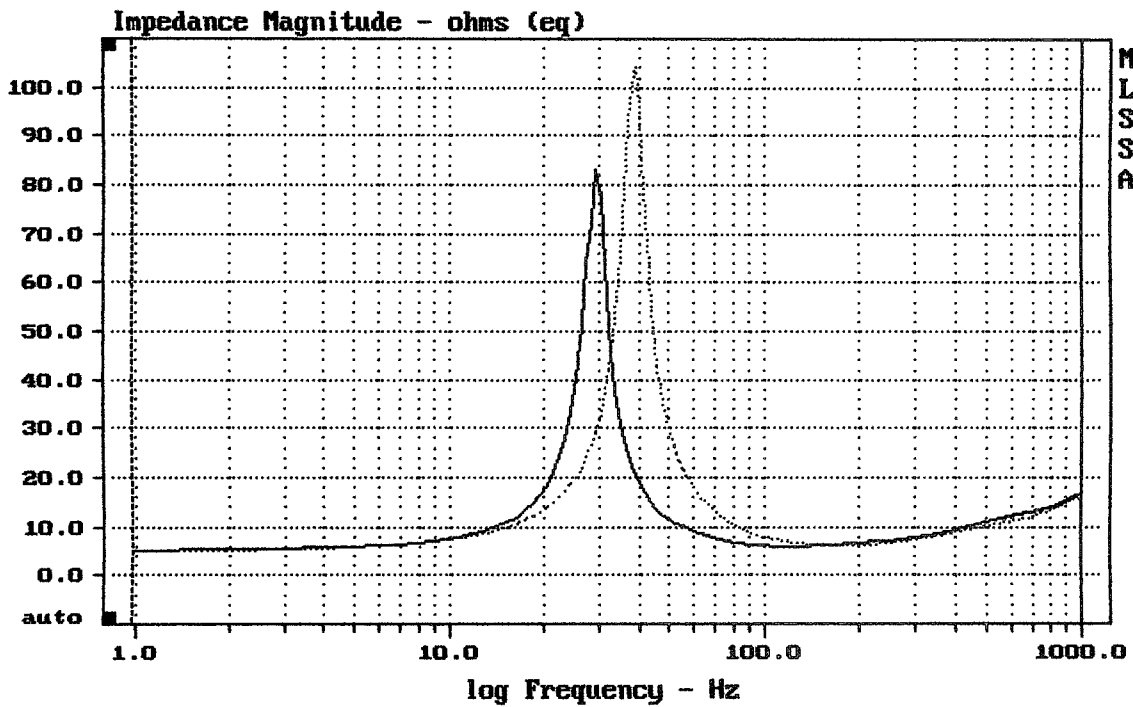

mean: 11.89, rms: 14.58, std: 8.441, max: 104.3, min: 5.282

MLSSA: Frequency Domain