


Level (100:3107 Hz) = 98.04 dB SPL/watt (8 ohms, @1.50 meters)

15NDL88

NLSSA: Frequency Domain

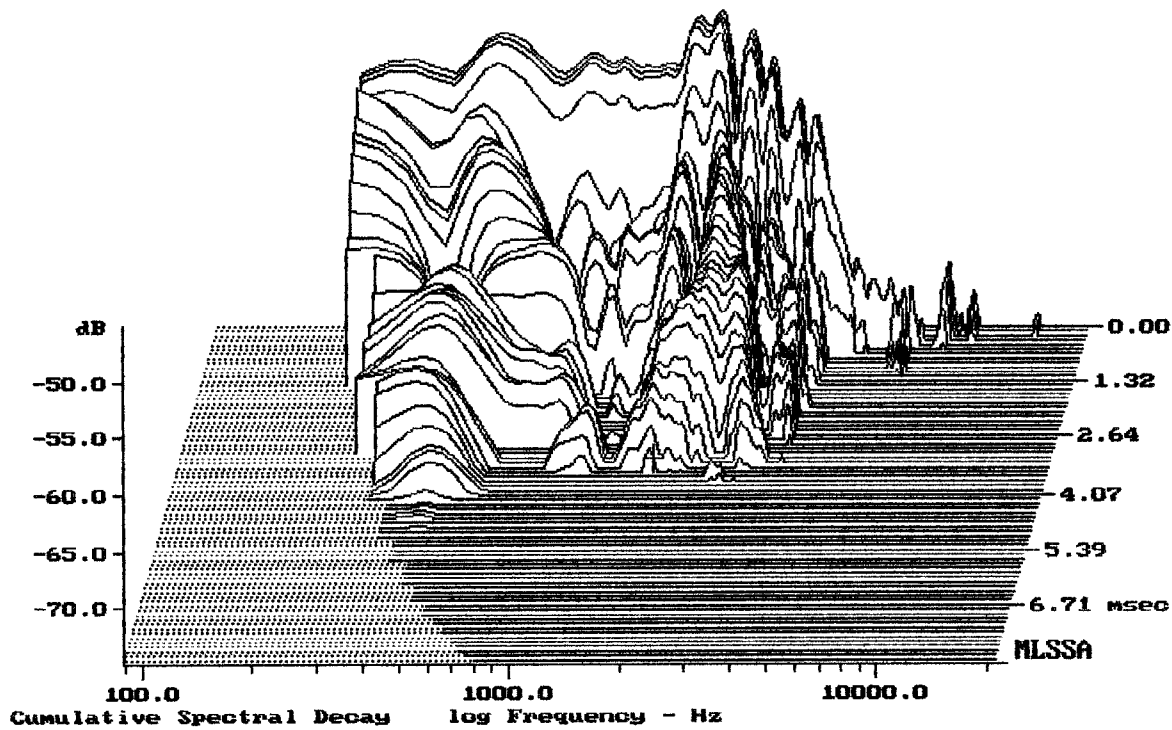

-73.80 dB, 1776 Hz (40), 3.520 msec (33)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	52.40	Hz
3	Re	5.08	Ohms[dc]
4	Res	92.86	Ohms
5	Qms	8.00	
6	Qes	0.44	
7	Qts	0.41	
8	L1	0.74	mH
9	L2	1.19	mH
10	R2	4.16	Ohms
11	RMSE-load	0.30	Ohms
12	Vas(Sd)	115.64	liters
13	Mms	87.06	grams
14	Cms	106	$\mu\text{M}/\text{Newton}$
15	B1	18.24	Tesla-M
16	SPLref(Sd)	97.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.7% (-20% to -50% is recommended).

15NDL88

MLSSA: Parameters

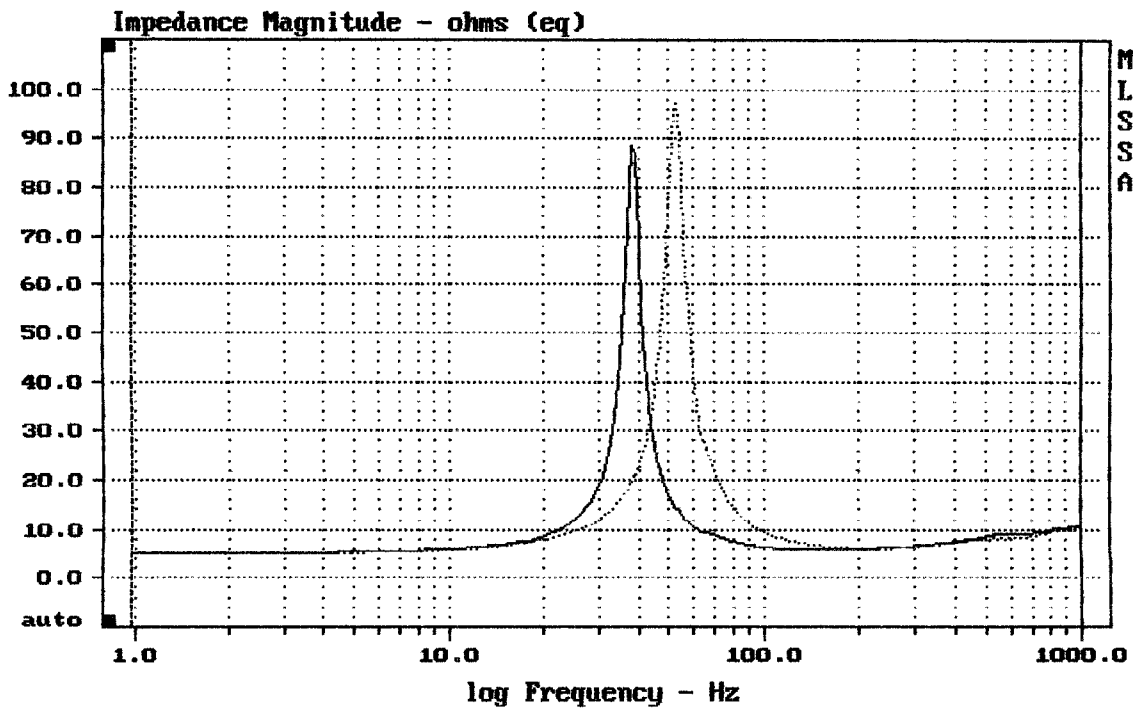

mean: 9.545, rms: 12.54, std: 8.131, max: 97.25, min: 5.164

MLSSA: Frequency Domain