

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.86	Ohms
2	Fs	38.60	Hz
3	Re	5.91	Ohms[dc]
4	Res	131.22	Ohms
5	Qms	8.03	
6	Qes	0.36	
7	Qts	0.35	
8	L1	0.83	mH
9	L2	1.41	mH
10	R2	8.79	Ohms
11	RMSE-load	0.75	Ohms
12	Vas(Sd)	213.38	liters
13	Mms	143.90	grams
14	Cms	118	$\mu\text{M}/\text{Newton}$
15	B1	23.88	Tesla-M
16	SPLref(Sd)	97.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.0% (-20% to -50% is recommended).


D.A.S. 18G

MLSSA: Parameters

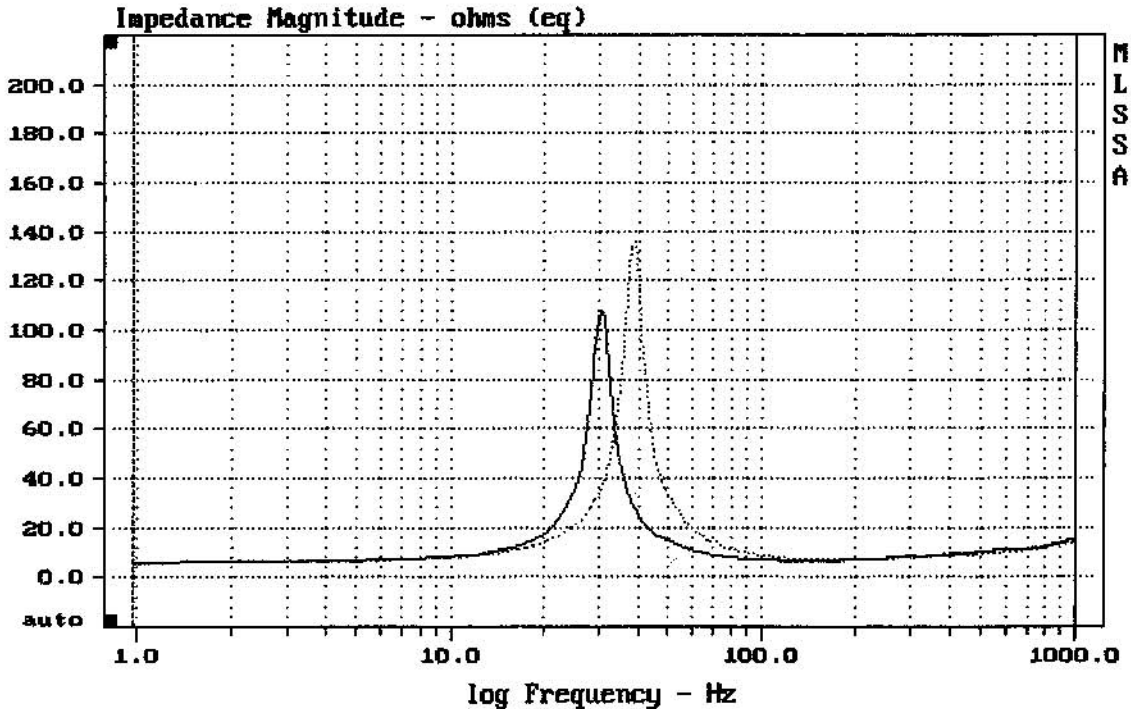

DTTO


MLSSA: Frequency Domain

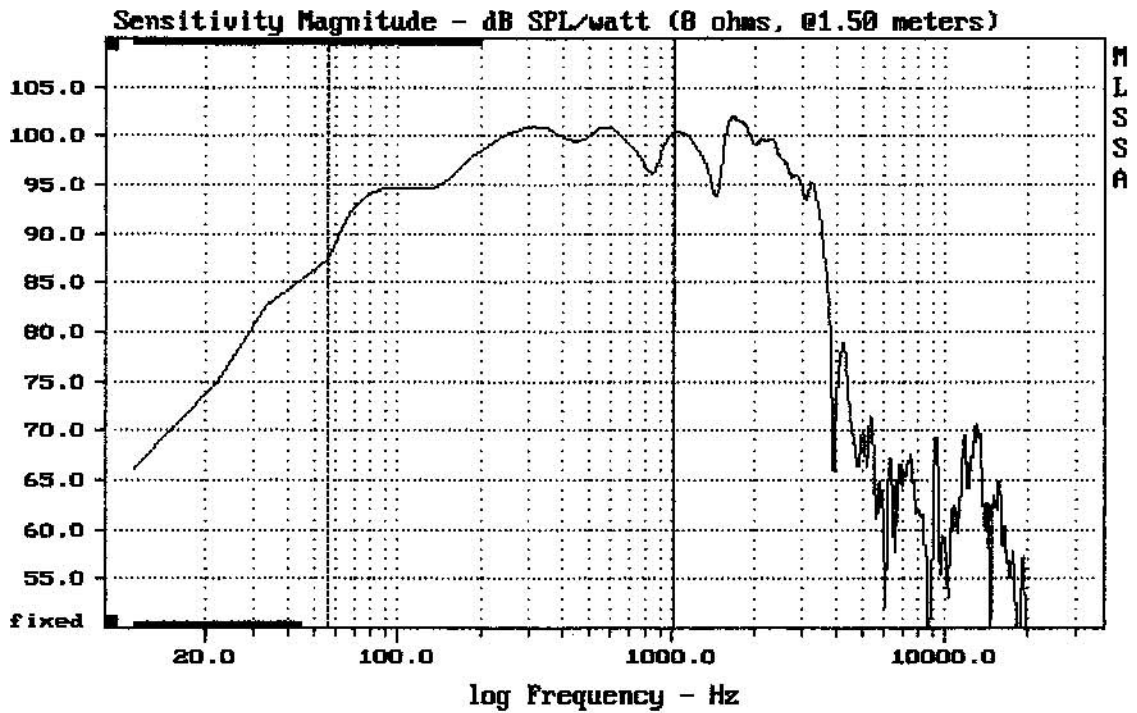

Level (55:1010 Hz) = 98.14 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 18G

MLSSA: Frequency Domain

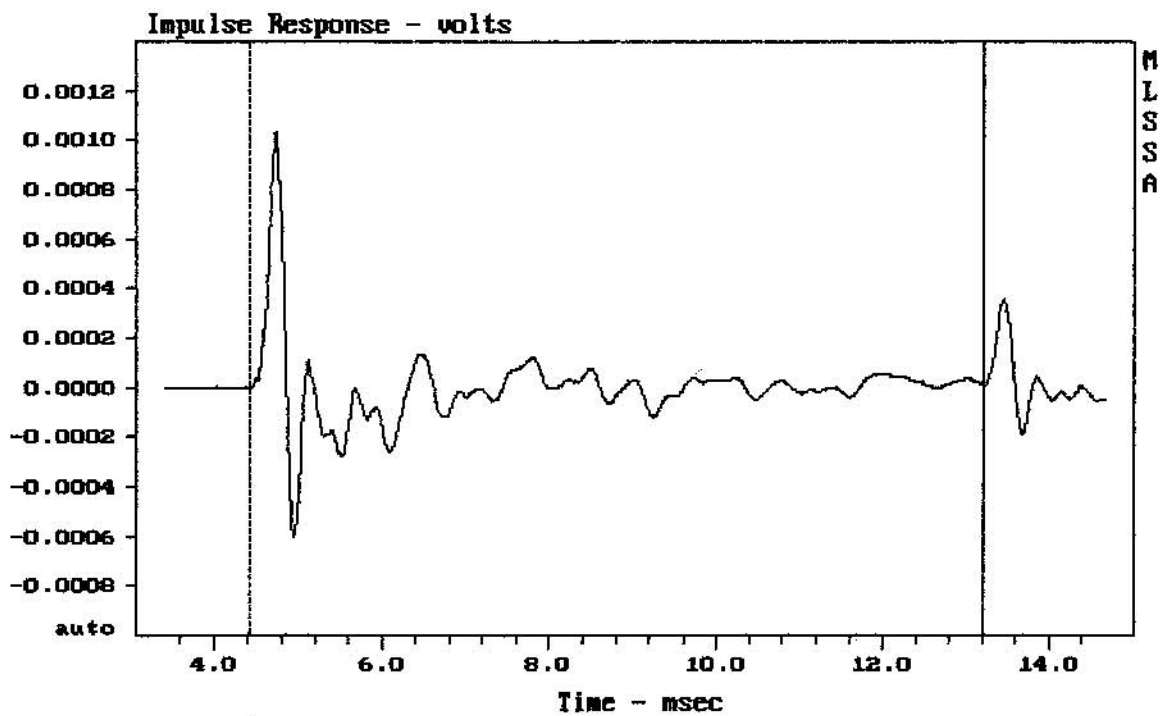

mean: $-1.292e-007$, rms: 0.0001586, std: 0.0001586, max: 0.001034, min: -0.0006

D.A.S. 18G