


Level (55:2996 Hz) = 97.10 dB SPL/watt (8 ohms, @1.50 meters)

DAS18H

MLSSA: Frequency Domain

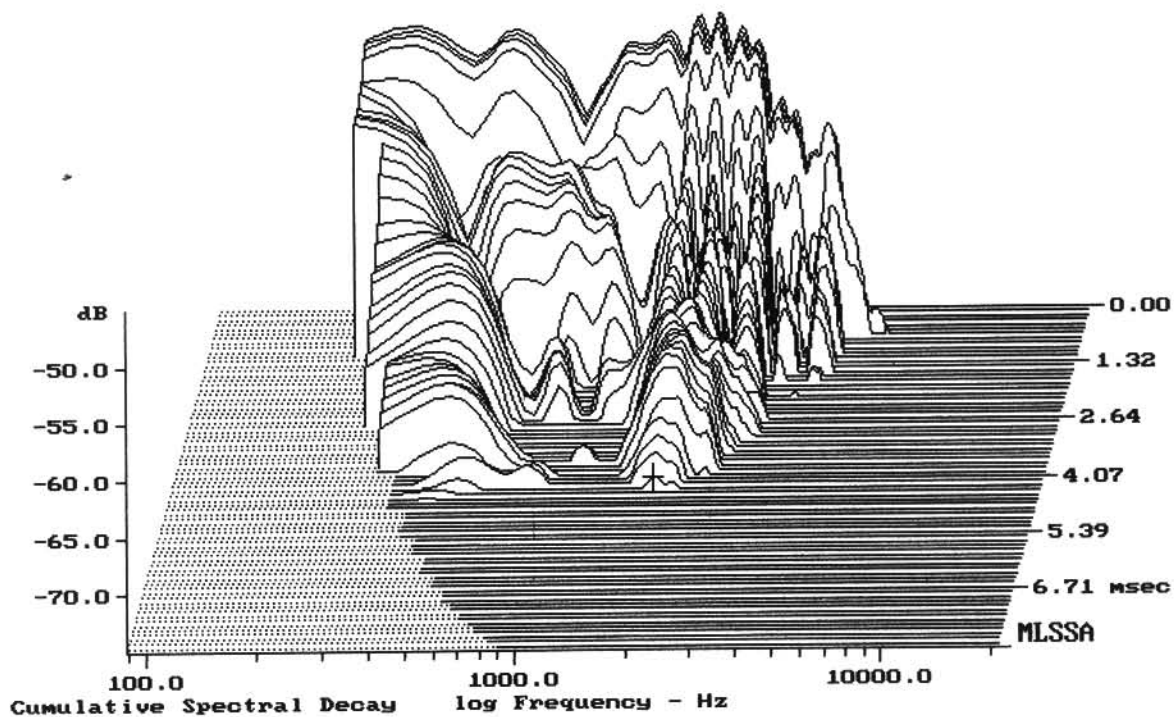

-74.02 dB, 1820 Hz (41), 4.290 msec (40)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	34.80	Hz
3	Re	5.73	Ohms[dc]
4	Res	126.88	Ohms
5	Qms	8.69	
6	Qes	0.39	
7	Qts	0.38	
8	L1	1.17	mH
9	L2	1.40	mH
10	R2	6.09	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	296.17	liters
13	Mms	127.56	grams
14	Cms	164	$\mu\text{M}/\text{Newton}$
15	B1	20.18	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

DAS18H

MLSSA: Parameters

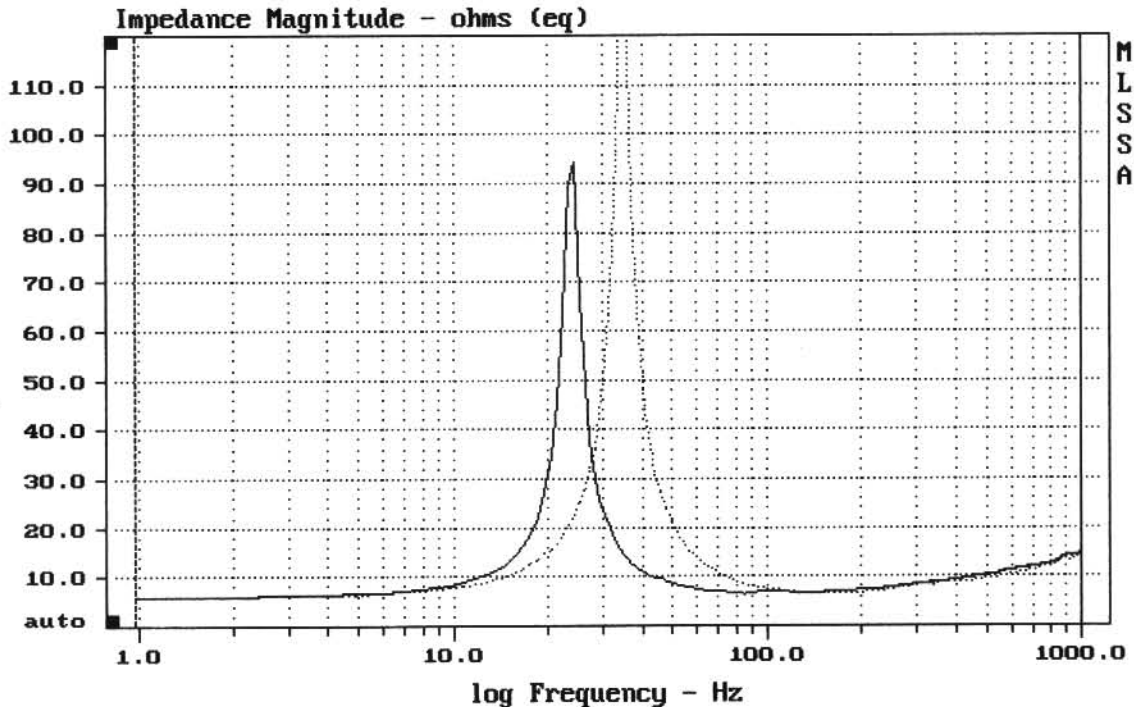

mean: 11.35, rms: 14.45, std: 8.948, max: 132.9, min: 5.776

DTTO

MLSSA: Frequency Domain