


Level (100:4605 Hz) = 100.45 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BLACK MOUNTAIN

MLSSA: Frequency Domain

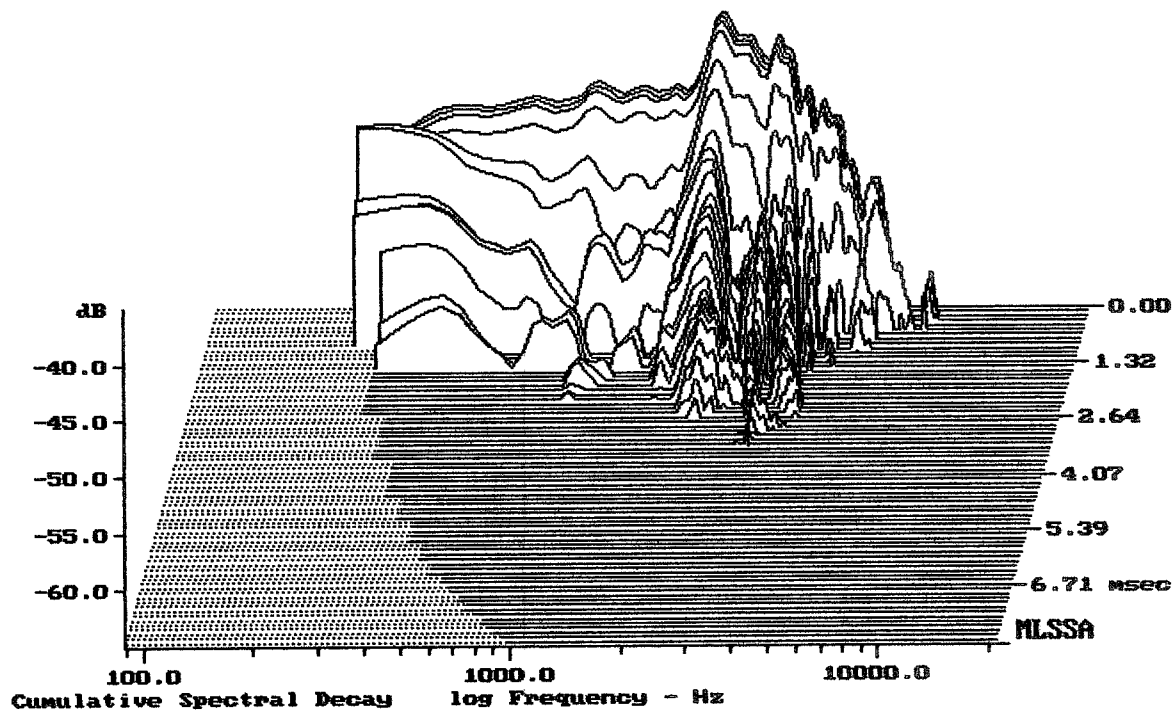

-64.38 dB, 3107 Hz (70), 3.190 msec (30)

DTTO

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.89	Ohms
2	Fs	68.82	Hz
3	Re	6.34	Ohms[dc]
4	Res	141.58	Ohms
5	Qms	12.16	
6	Qes	0.54	
7	Qts	0.52	
8	L1	0.22	mH
9	L2	1.23	mH
10	R2	9.39	Ohms
11	RMSE-load	0.50	Ohms
12	Vas(Sd)	74.64	liters
13	Mms	28.37	grams
14	Cms	189	$\mu\text{M}/\text{Newton}$
15	B1	11.95	Tesla-M
16	SPLref(Sd)	98.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.8% (-20% to -50% is recommended).

EMINENCE BLACK MOUNTAIN

MLSSA: Parameters

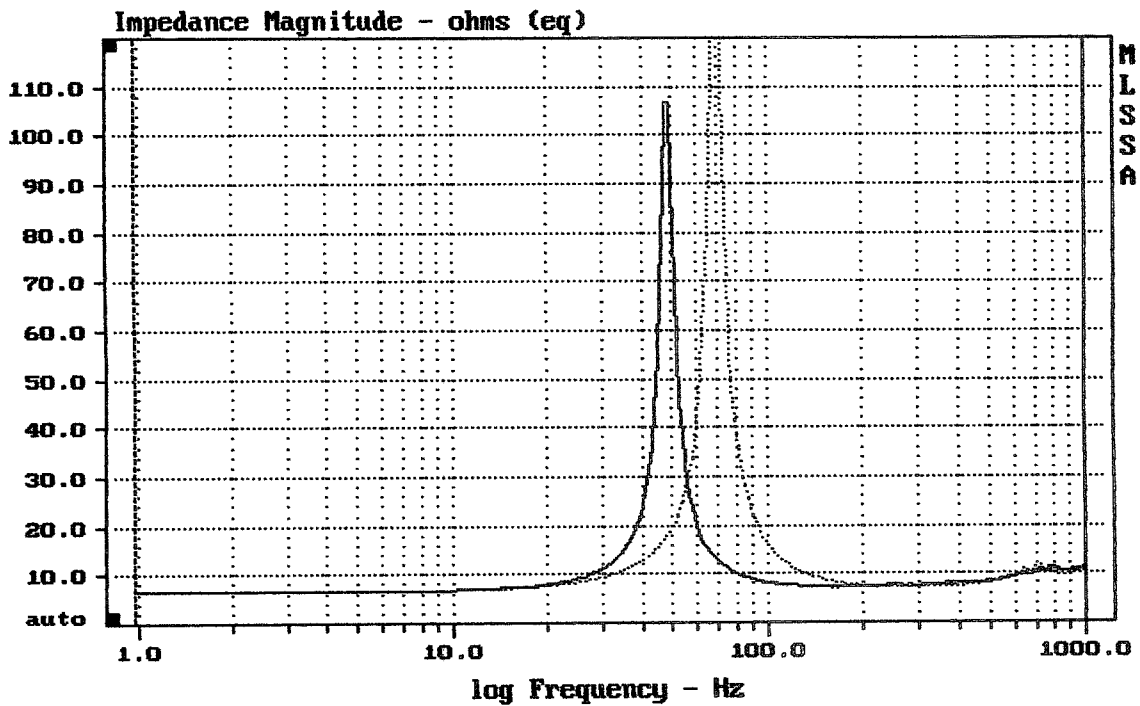

mean: 11.16, rms: 16.3, std: 11.88, max: 145.1, min: 6.436

MLSSA: Frequency Domain