


Level (100:3507 Hz) = 99.10 dB SPL/watt (8 ohms, @1.50 meters)

DELTALITE-II 2515

MLSSA: Frequency Domain

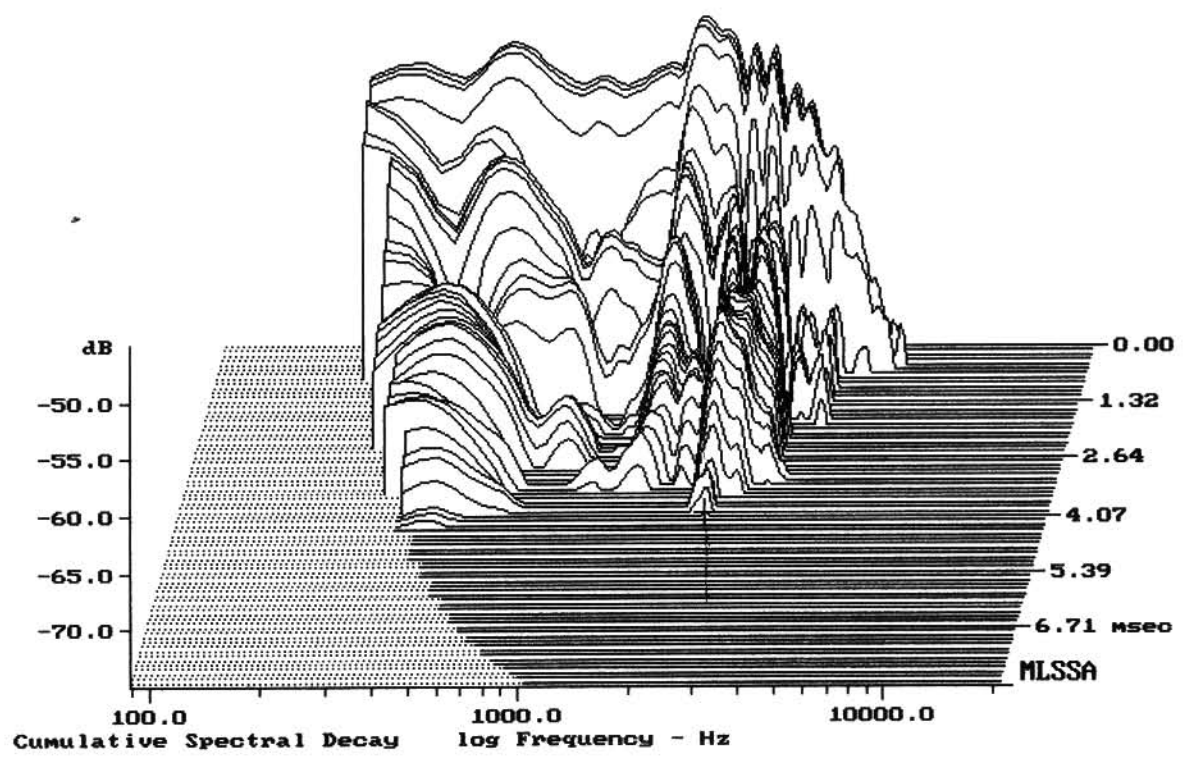

-74.62 dB, 2397 Hz (54), 4.070 msec (38)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.25	Ohms
2	Fs	42.77	Hz
3	Re	4.96	Ohms[dc]
4	Res	48.75	Ohms
5	Qms	4.32	
6	Qes	0.44	
7	Qts	0.40	
8	L1	0.97	mH
9	L2	1.34	mH
10	R2	4.56	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	228.02	liters
13	Mms	62.40	grams
14	Cms	222	$\mu\text{M}/\text{Newton}$
15	B1	13.75	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.0% (-20% to -50% is recommended).

DELTALITE-II 2515

MLSSA: Parameters

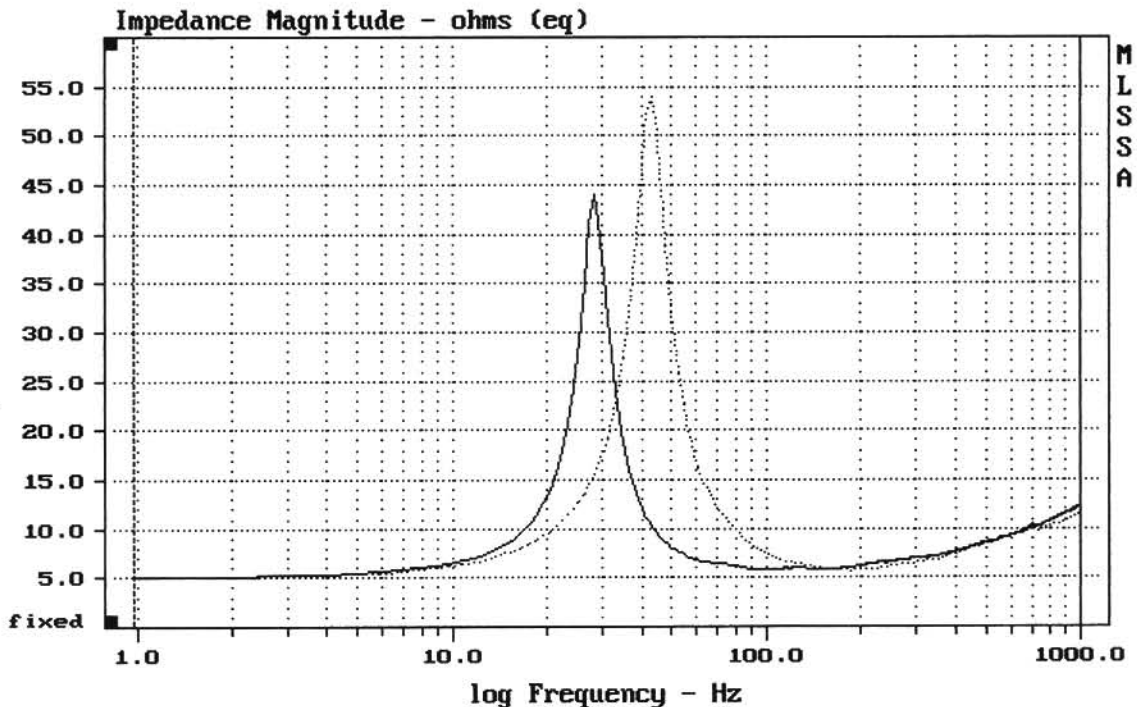

mean: 9.397, rms: 10.62, std: 4.944, max: 53.92, min: 5.036

DTTO

MLSSA: Frequency Domain