

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	69.91	Hz
3	Re	4.71	Ohms[dc]
4	Res	85.78	Ohms
5	Qms	8.32	
6	Qes	0.46	
7	Qts	0.43	
8	L1	0.49	mH
9	L2	0.85	mH
10	R2	2.73	Ohms
11	RMSE-load	0.50	Ohms
12	Vas(Sd)	22.31	liters
13	Mms	16.81	grams
14	Cms	308	$\mu\text{M}/\text{Newton}$
15	B1	8.73	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.3% (-20% to -50% is recommended).


FANE CR.8MB

MLSSA: Parameters

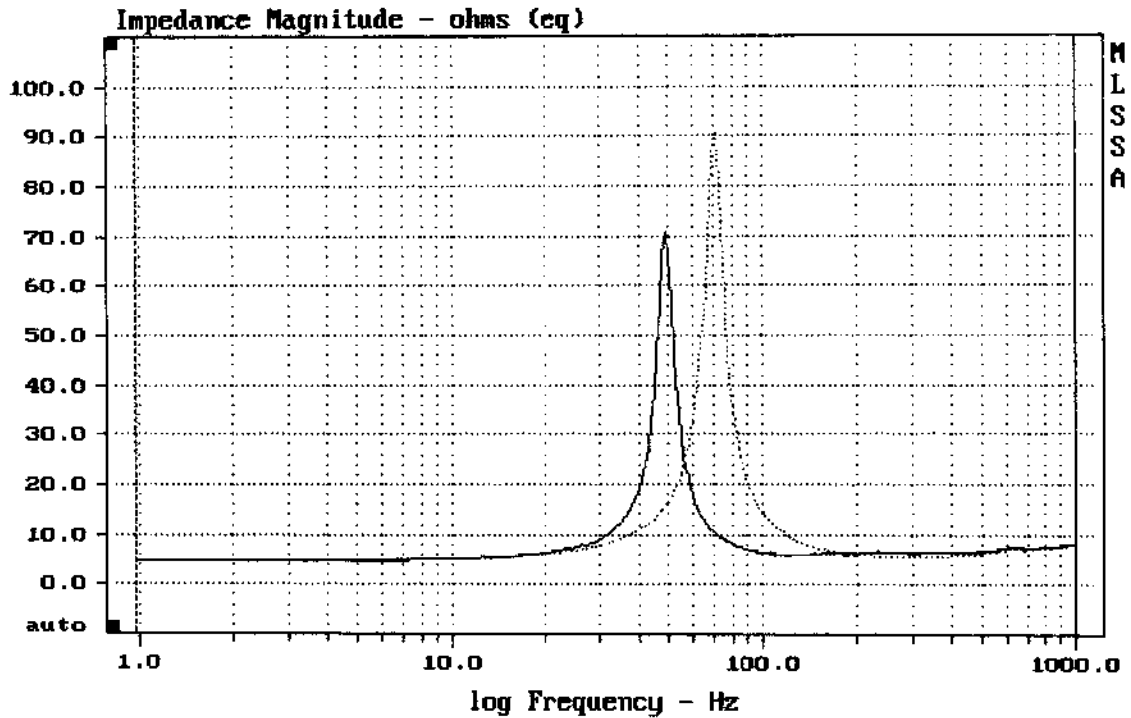

CURSOR: dy = -0.087066 x = 1000.9766 (1025)

MLSSA: Frequency Domain

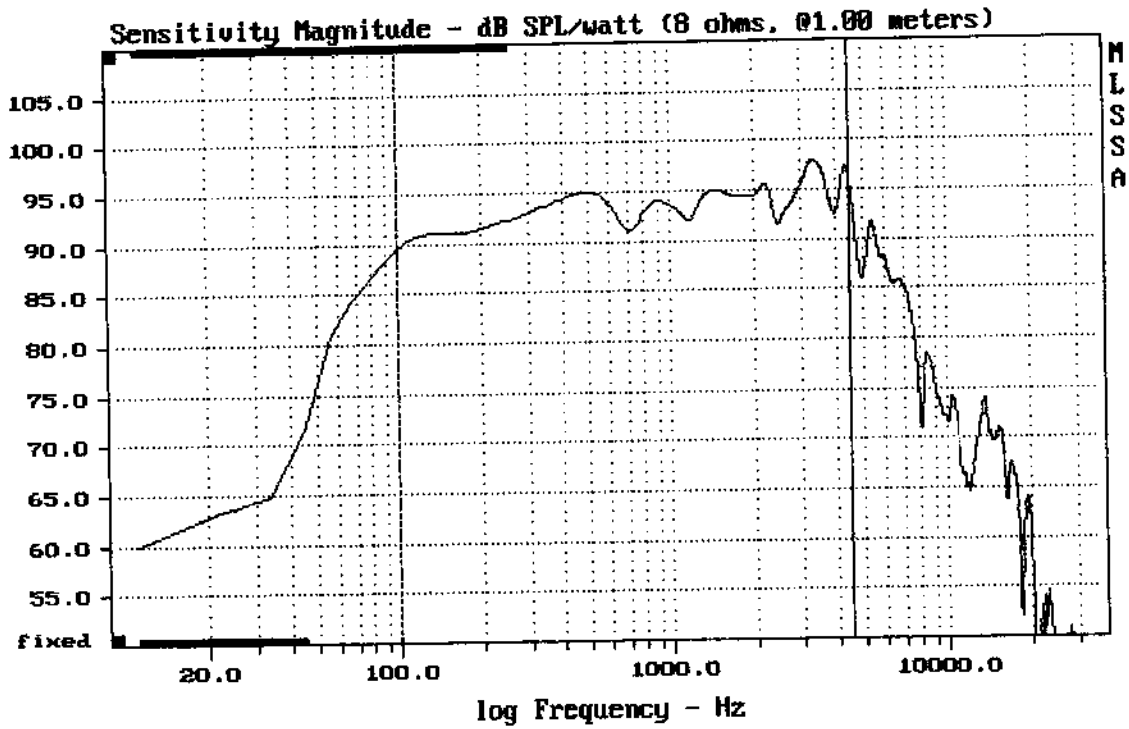



---

Level (100:4506 Hz) = 93.67 dB SPL/watt (8 ohms, @1.00 meters)

---

FANE CR.8MB

MLSSA: Frequency Domain

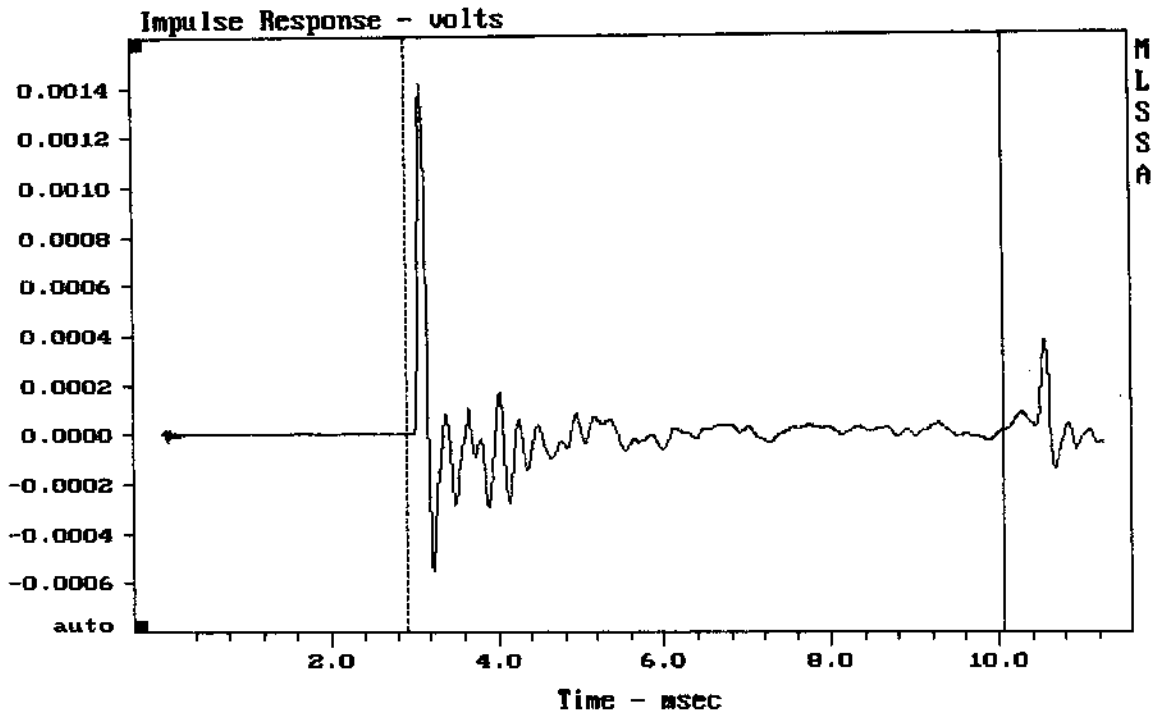


---

CURSOR: y = 9.87793e-006 x = 10.0760 (916)

---

FANE CR.8MB