


Level (144:6503 Hz) = 89.71 dB SPL/watt (8 ohms, @1.00 meters)

FANE STUDIO SHPM

MLSSA: Frequency Domain

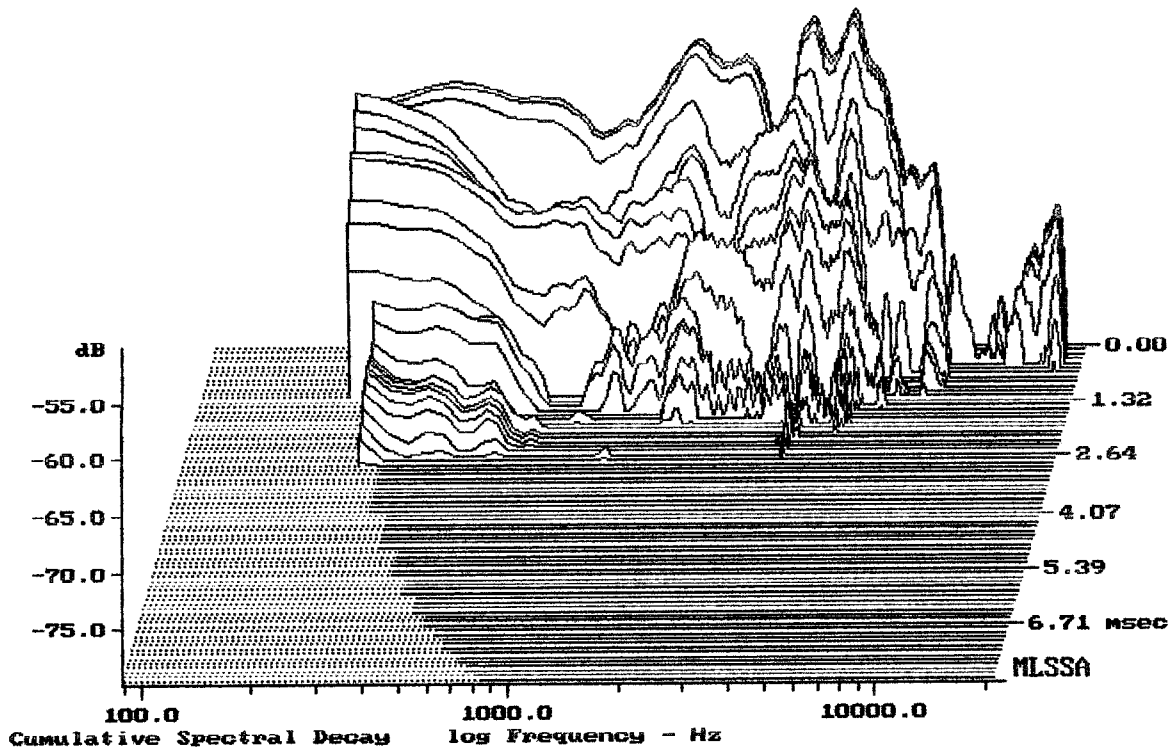

-79.27 dB, 3773 Hz (85), 2.640 msec (25)

DITO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	187.03	Hz
3	Re	6.88	Ohms[dc]
4	Res	31.66	Ohms
5	Qms	4.79	
6	Qes	1.04	
7	Qts	0.85	
8	L1	0.49	mH
9	L2	0.50	mH
10	R2	1.79	Ohms
11	RMSE-load	1.27	Ohms
12	Vas(Sd)	1.83	liters
13	Mms	4.17	grams
14	Cms	174	$\mu\text{M}/\text{Newton}$
15	B1	5.69	Tesla-M
16	SPLref(Sd)	92.4	dB[Re]
17	Rub-index	0.23	

Method: Mass-loaded (5.00 grams)

Area (Sd): 86.59 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.0% (-20% to -50% is recommended).

FANE STUDIO 5HPM

MLSSA: Parameters

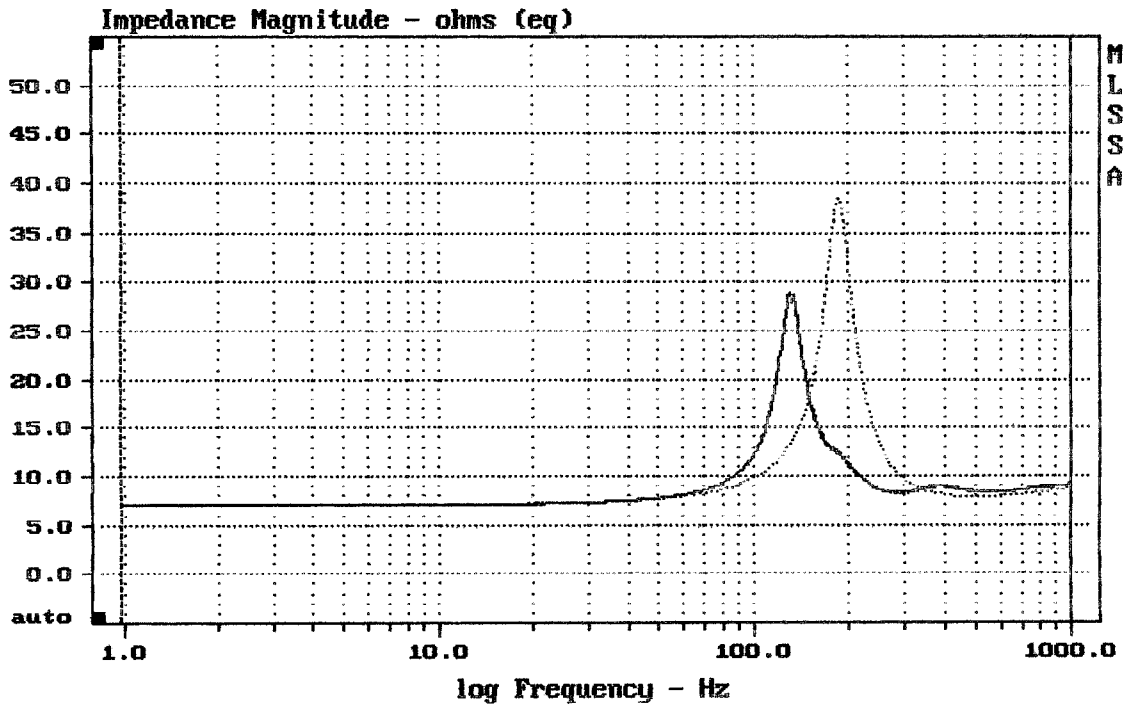

mean: 10.31, rms: 11.79, std: 5.736, max: 38.72, min: 6.998

MLSSA: Frequency Domain