



Level (100:1498 Hz) = 95.66 dB SPL/watt (8 ohms, @1.50 meters)

L15P400

MLSSA: Frequency Domain

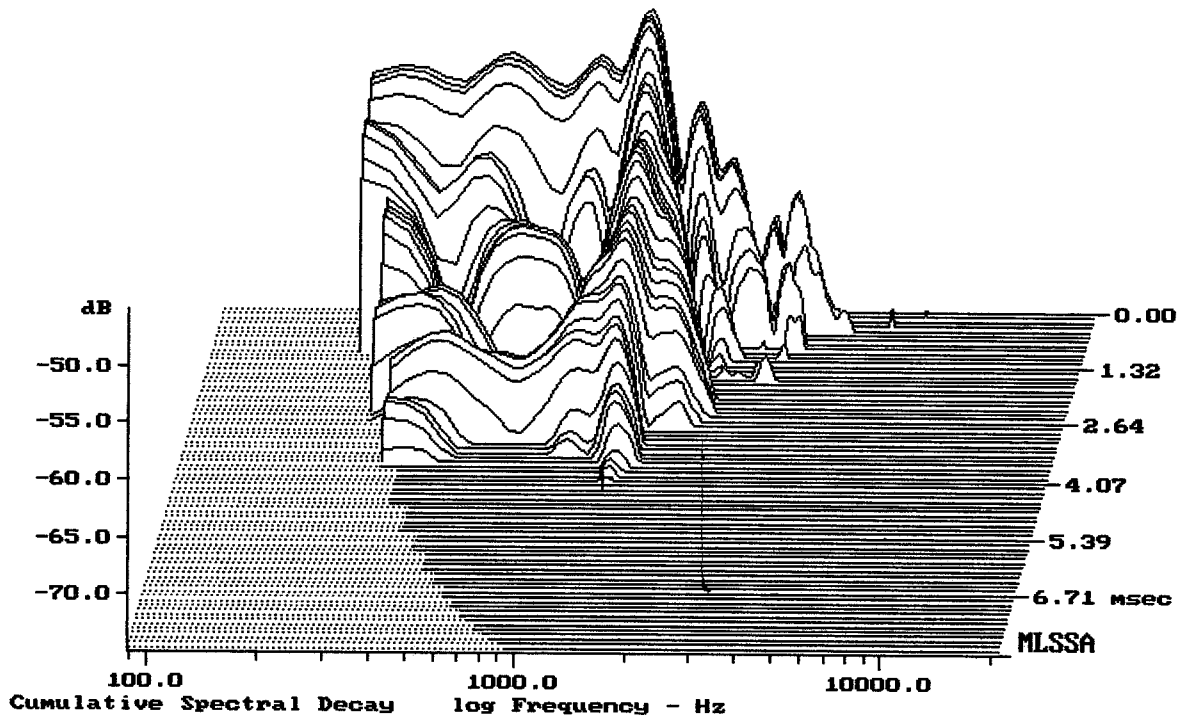


-74.74 dB, 1287 Hz (29), 4.070 msec (38)

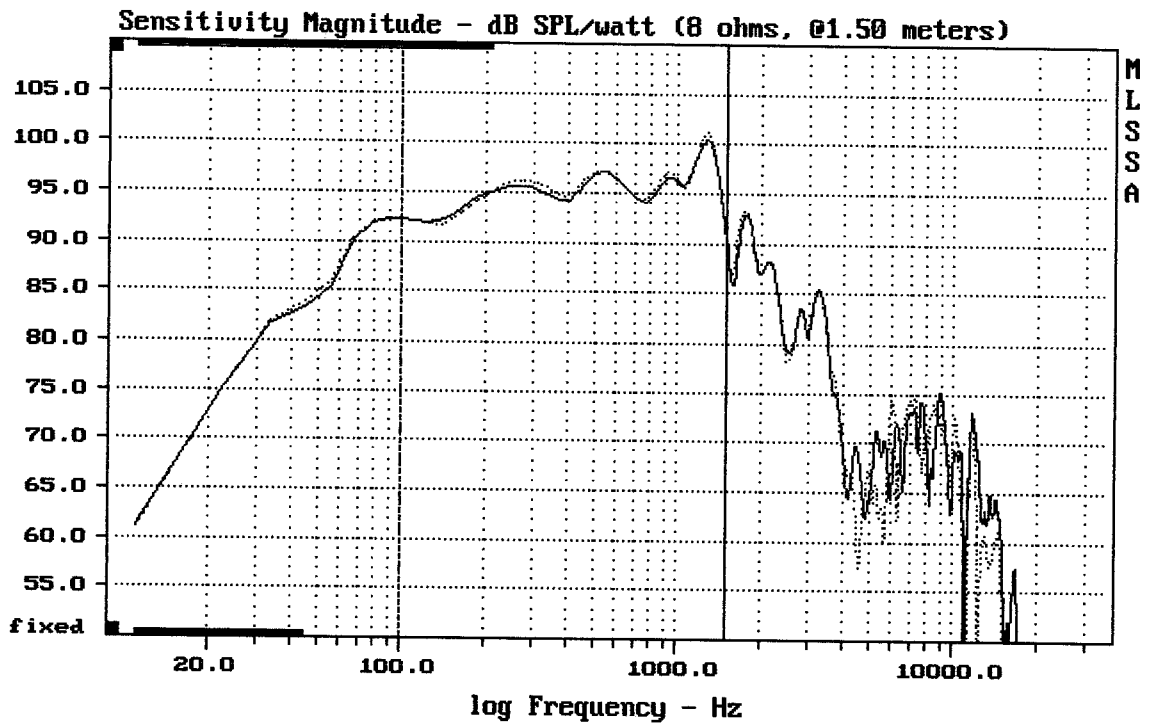

Level (100:1498 Hz) = 95.74 dB SPL/watt (8 ohms, @1.50 meters)

L15P400

MLSSA: Frequency Domain

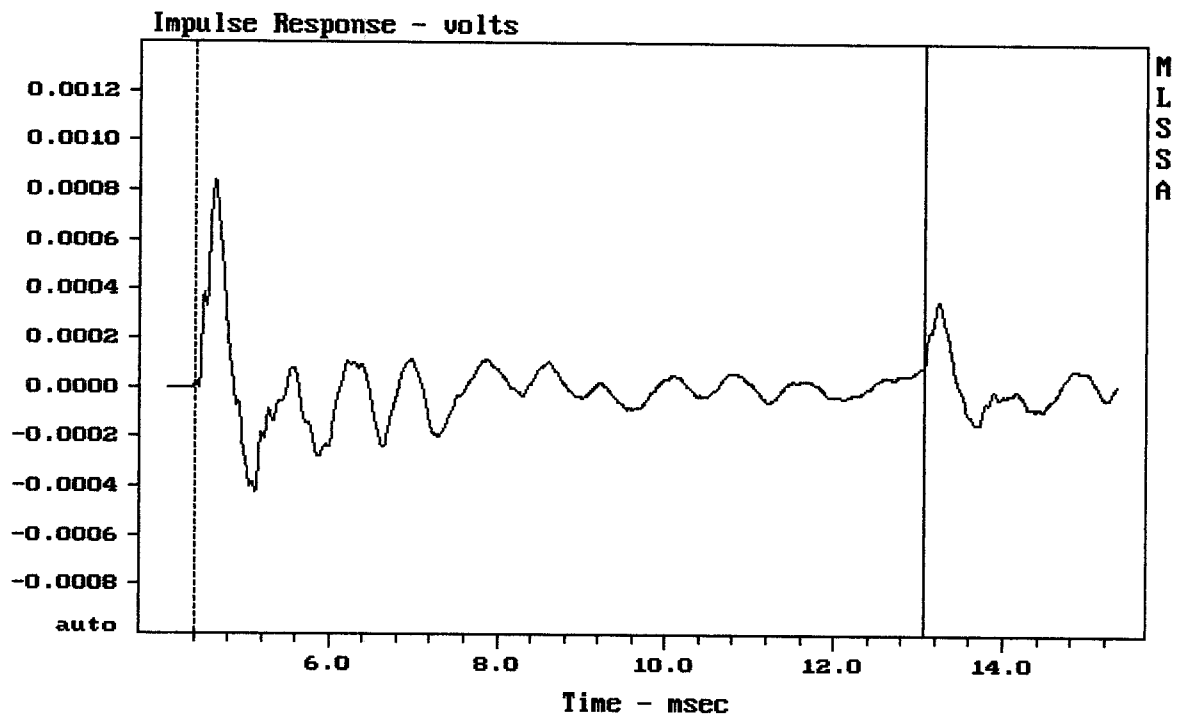

mean: -2.053e-006, rms: 0.0001466, std: 0.0001466, max: 0.0008367, min: -0.000

L15P400

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.94	Ohms
2	Fs	38.92	Hz
3	Re	4.93	Ohms[dc]
4	Res	163.63	Ohms
5	Qms	10.59	
6	Qes	0.32	
7	Qts	0.31	
8	L1	1.10	mH
9	L2	2.30	mH
10	R2	11.26	Ohms
11	RMSE-load	0.72	Ohms
12	Vas(Sd)	129.96	liters
13	Mms	148.97	grams
14	Cms	112	$\mu\text{M}/\text{Newton}$
15	Bl	23.73	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.1% (-20% to -50% is recommended).

L15P400

MLSSA: Parameters

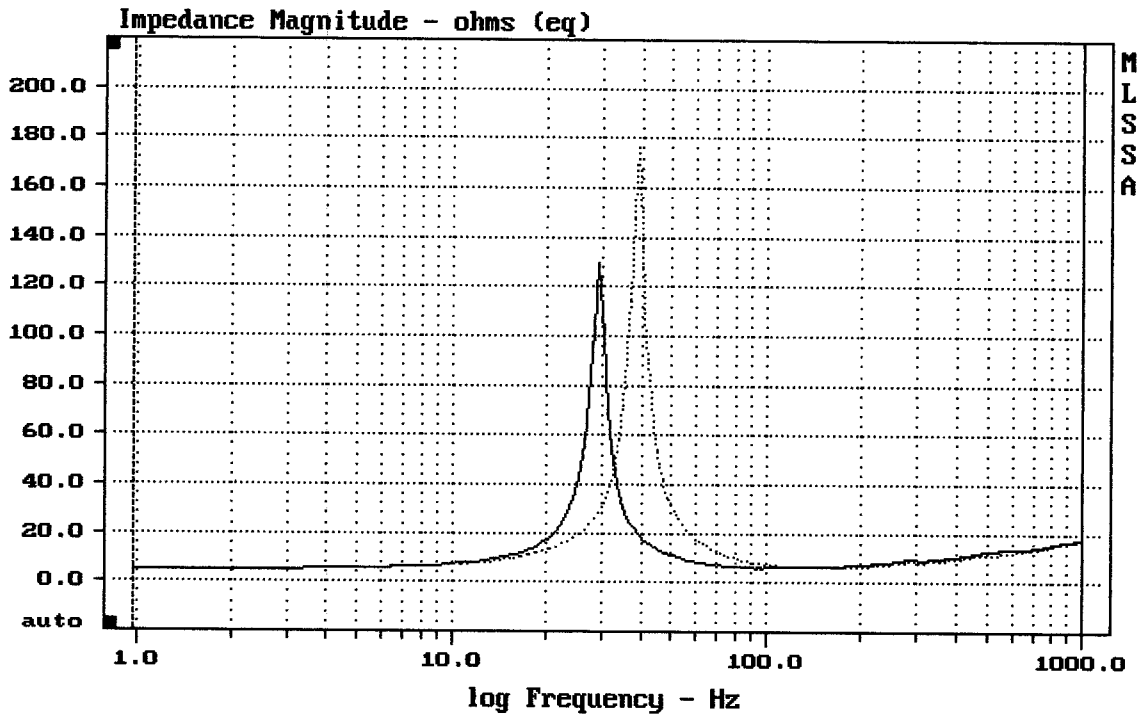

mean: 13.02, rms: 17.18, std: 11.21, max: 176.3, min: 5.031

MLSSA: Frequency Domain