



eShop: <http://eshop.prodance.cz/mb15x351-8-ohm/d-97079/>

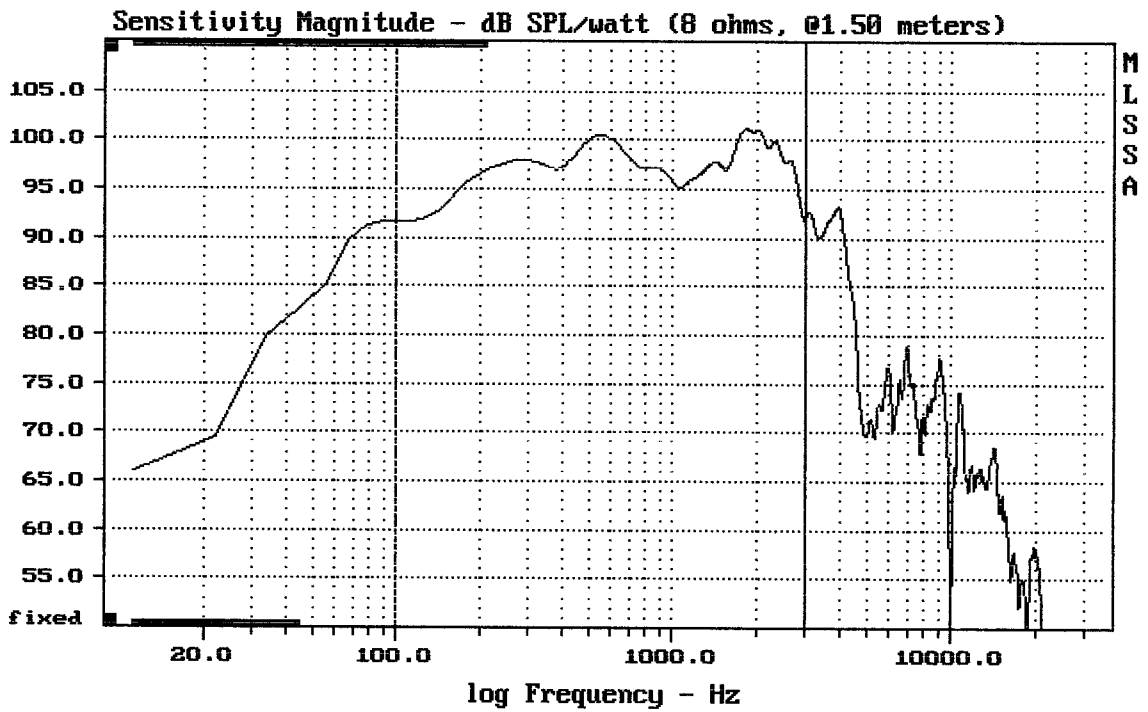

Level (100:3007 Hz) = 97.57 dB SPL/watt (8 ohms, @1.50 meters)

MB15X351

MLSSA: Frequency Domain

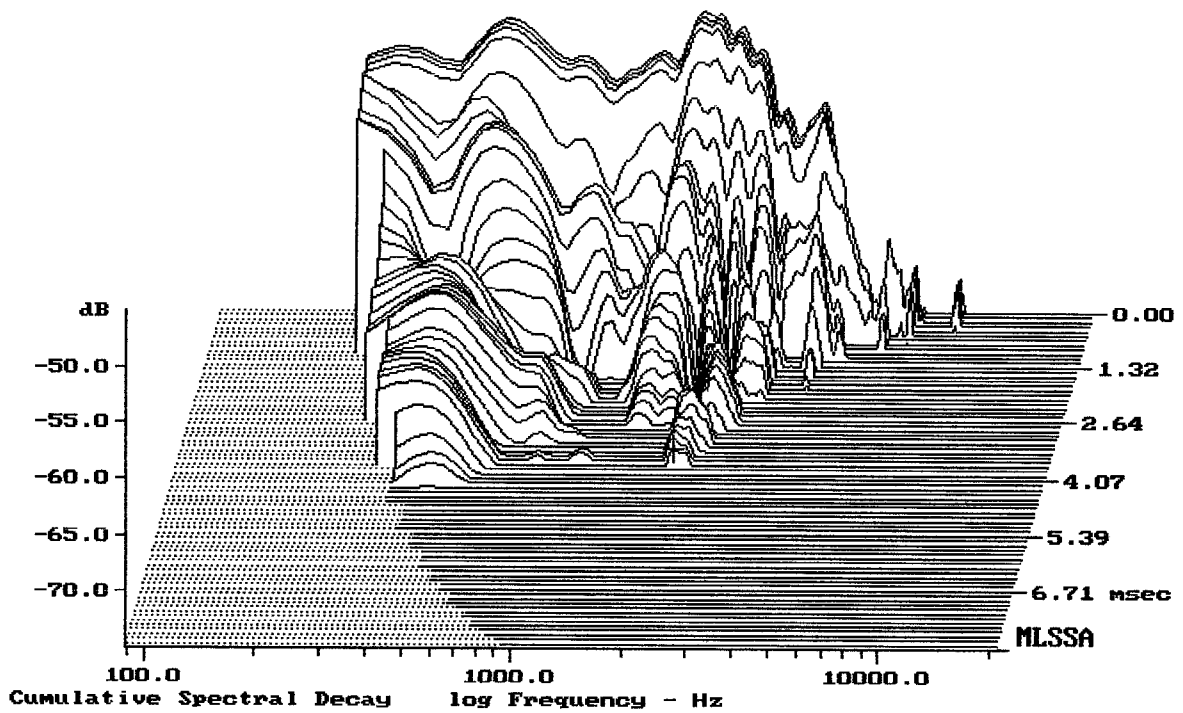

-73.58 dB, 1998 Hz (45), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.47	Ohms
2	Fs	66.74	Hz
3	Re	5.49	Ohms[dc]
4	Res	58.38	Ohms
5	Qms	5.45	
6	Qes	0.51	
7	Qts	0.47	
8	L1	0.90	mH
9	L2	1.59	mH
10	R2	6.18	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	62.04	liters
13	Mms	94.19	grams
14	Cms	60	$\mu\text{M}/\text{Newton}$
15	B1	20.56	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.9% (-20% to -50% is recommended).

MB15X351

MLSSA: Parameters

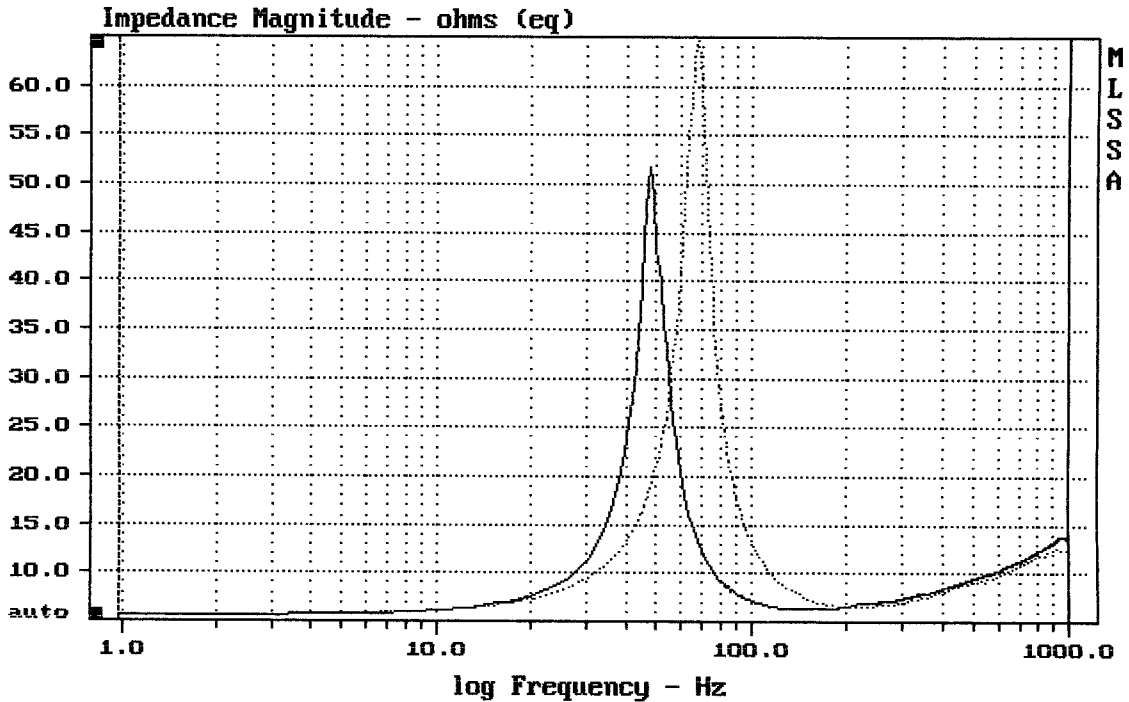

mean: 10.76, rms: 12.57, std: 6.497, max: 64.57, min: 5.571

MLSSA: Frequency Domain