


Level (100:2996 Hz) = 100.13 dB SPL/watt (8 ohms, @1.50 meters)

MB15N405

MLSSA: Frequency Domain

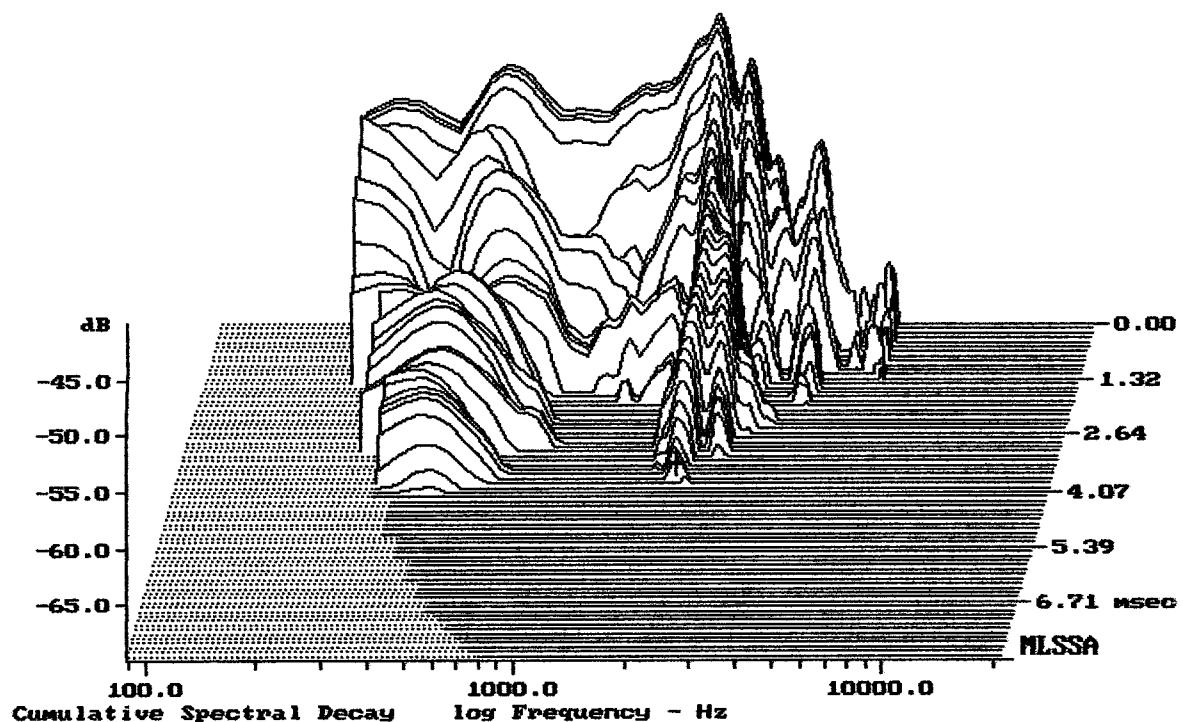

-68.54 dB, 1998 Hz (45), 3.748 msec (35)

DTTO

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	56.35	Hz
3	Re	4.84	Ohms[dc]
4	Res	80.56	Ohms
5	Qms	5.58	
6	Qes	0.33	
7	Qts	0.32	
8	L1	0.63	mH
9	L2	1.75	mH
10	R2	6.99	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	104.15	liters
13	Mms	88.68	grams
14	Cms	90	$\mu\text{M}/\text{Newton}$
15	B1	21.29	Tesla-M
16	SPLref(Sd)	99.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.9% (-20% to -50% is recommended).

MB15N405

MLSSA: Parameters

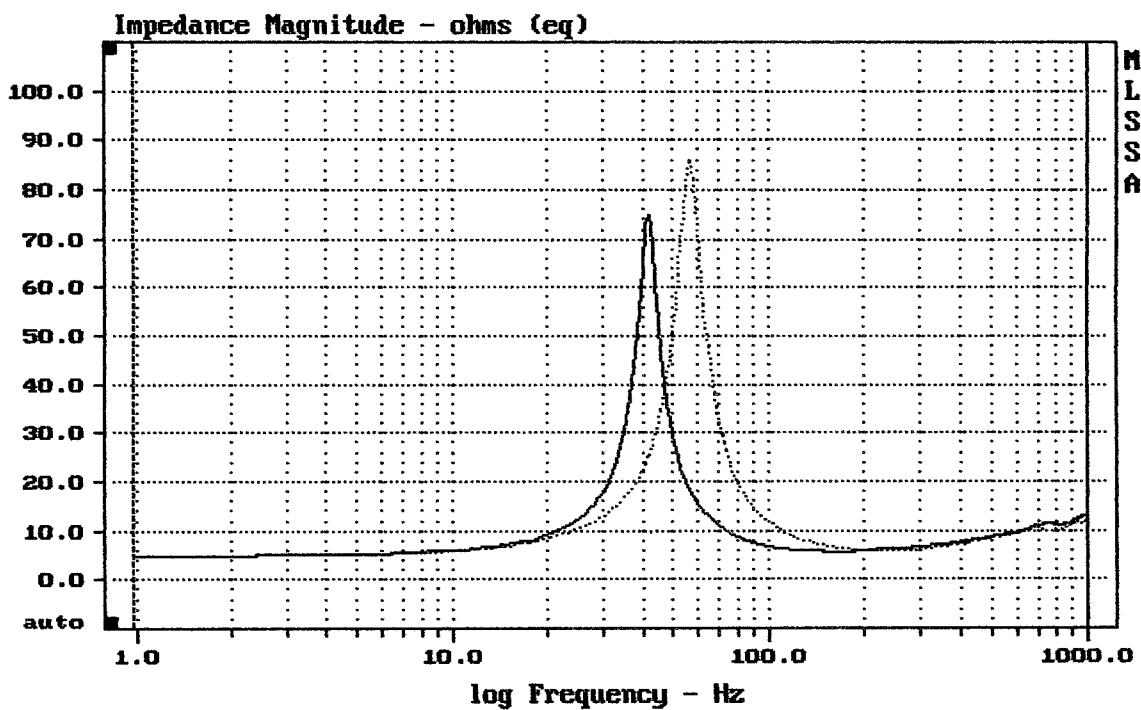

mean: 10.48, rms: 13.47, std: 8.452, max: 85.7, min: 4.957

MLSSA: Frequency Domain