



mean: 100.15, rms: 100.54, std: 2.31, max: 104.25, min: 89.98

NX10-SMA

MLSSA: Frequency Domain

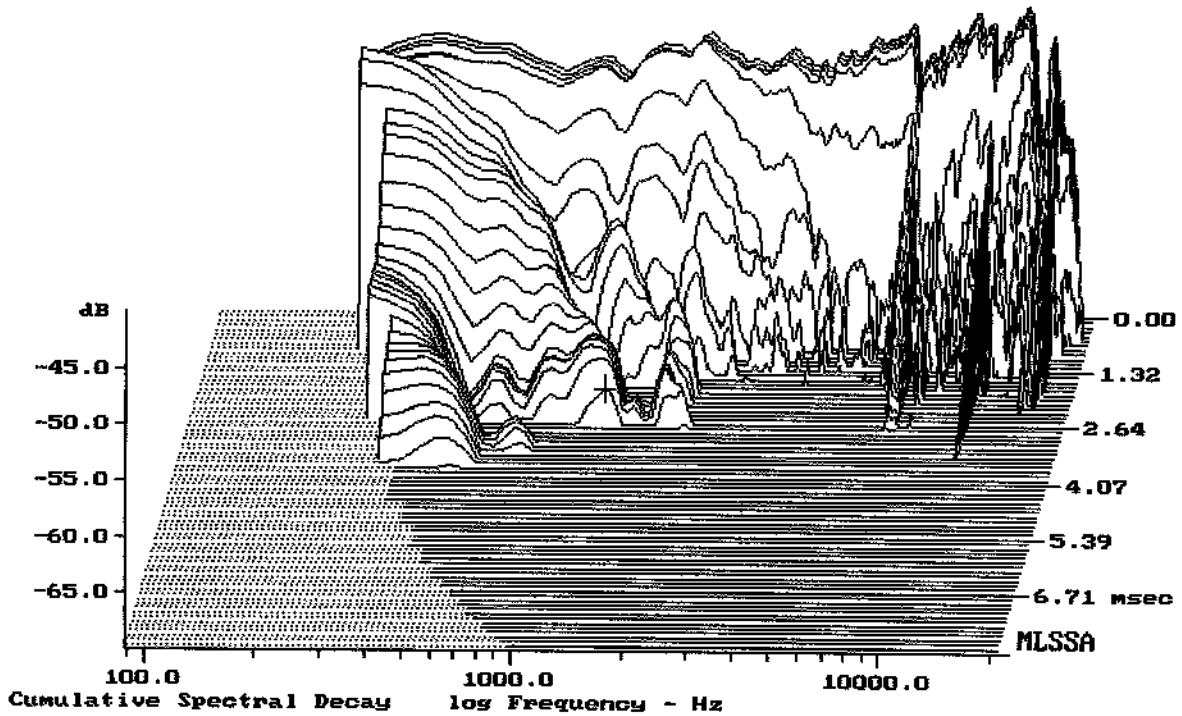


-66.90 dB, 1199 Hz (27), 2.640 msec (25)

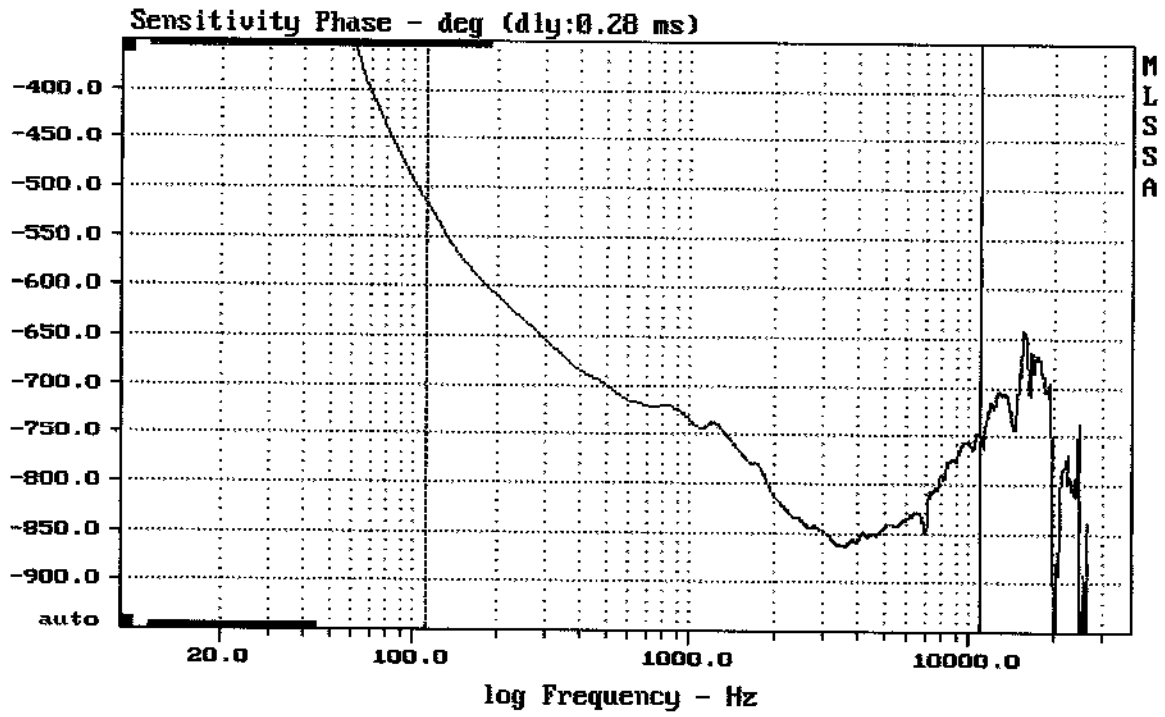

mean: -799.1, rms: 800.8, std: 52.54, max: -516.5, min: -863.8

NX10-SMA


MLSSA: Frequency Domain

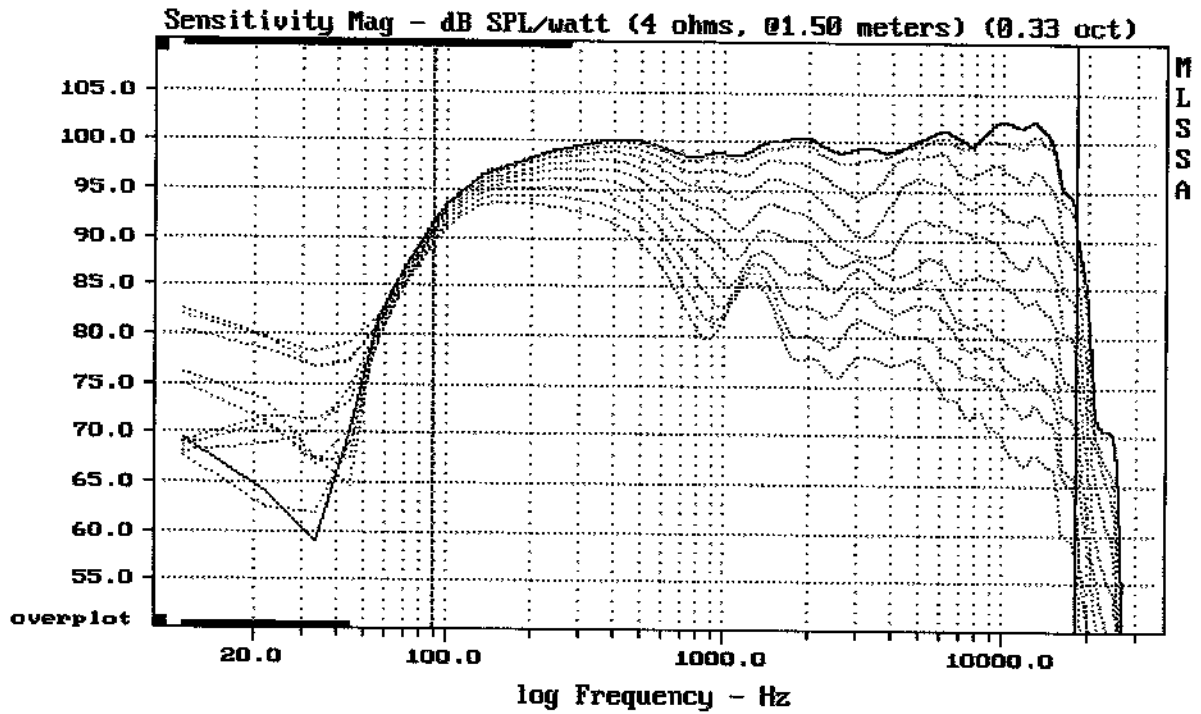

Overlay Compare: dev= +26/-6.9, std= 6.8, avg= -28


down

MLSSA: Frequency Domain

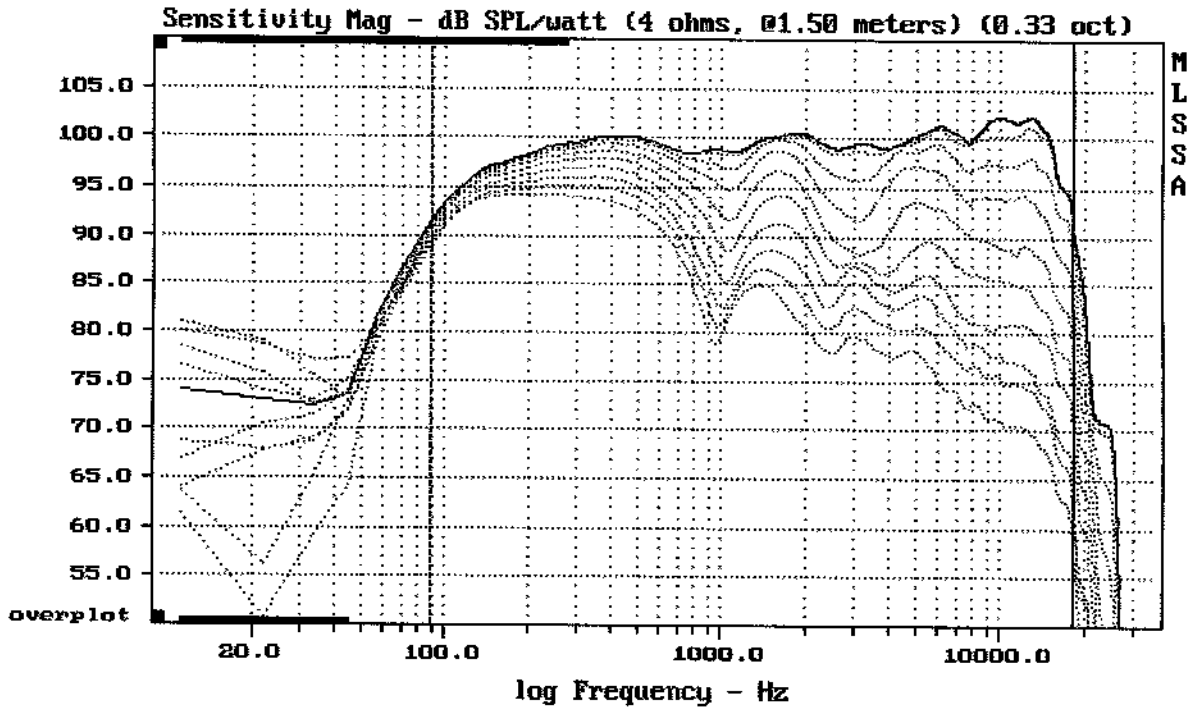

Overlay Compare: dev= +25/-6.1, std= 6.6, avg= -27


NX10-SMA UP

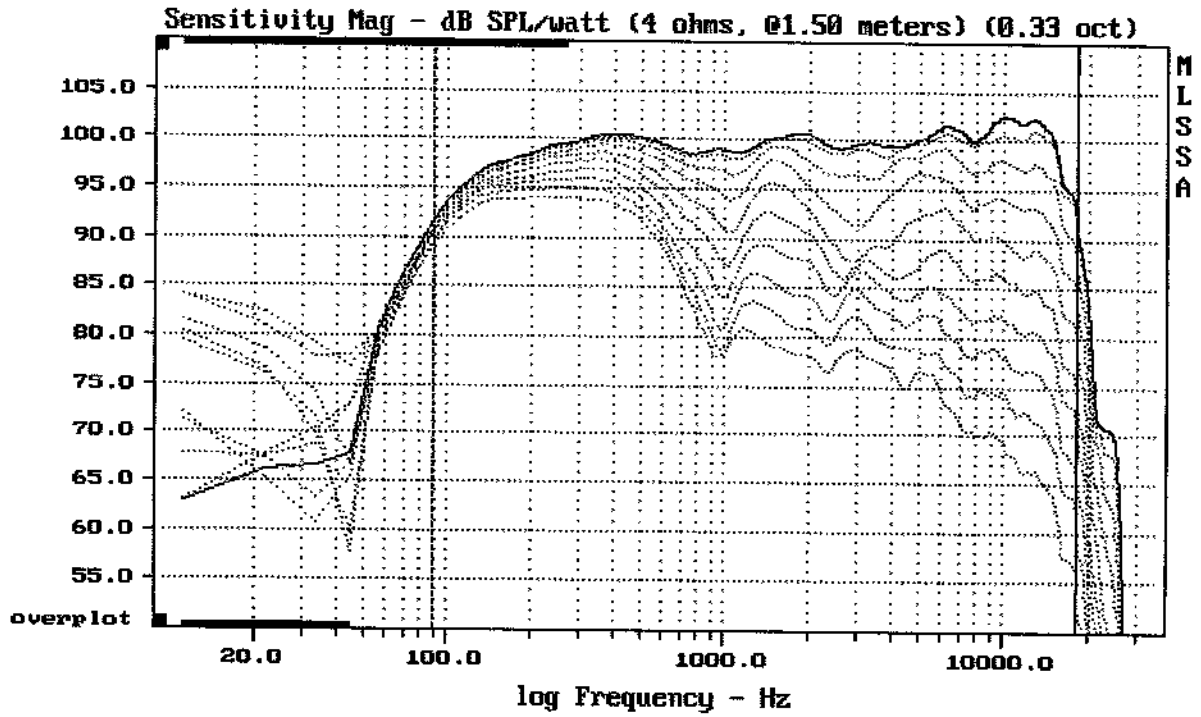

Overlay Compare: dev= +27/-8, std= 7.4, avg= -30


NX10-SMA

MLSSA: Frequency Domain

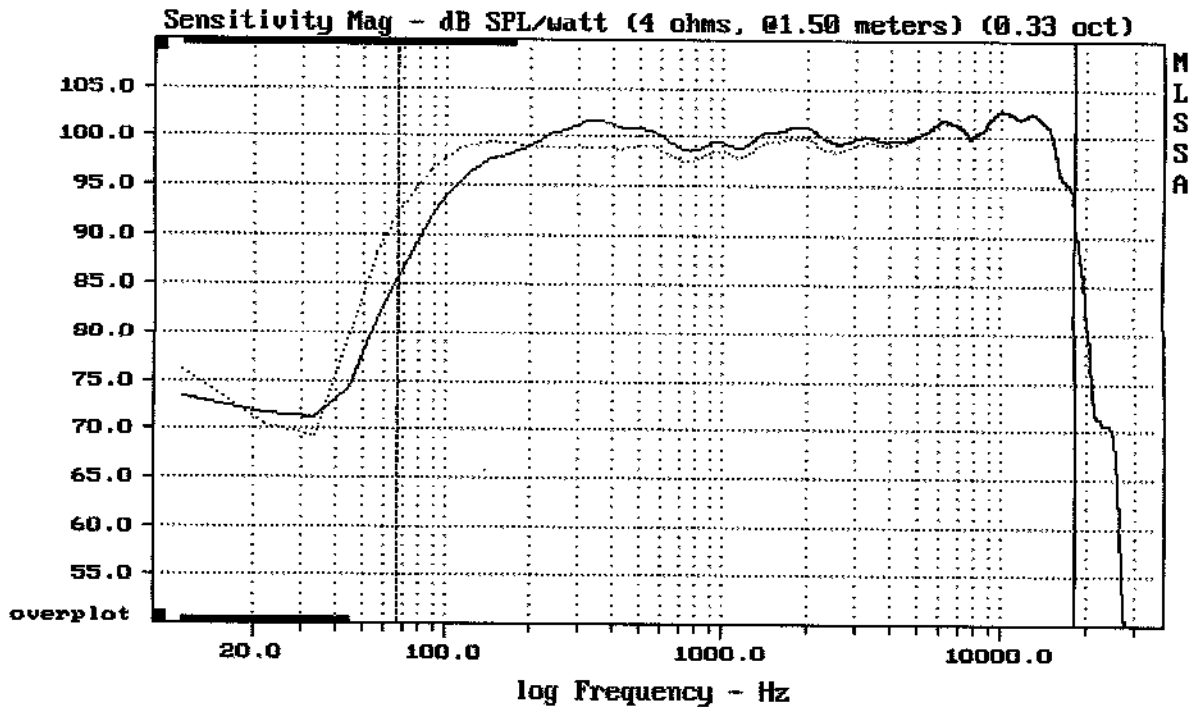

Overlay Compare: dev= +6.6/-2.4, std= 0.52, avg= -0.24


FLOOR/FREEFIELD SWITCH —/.....

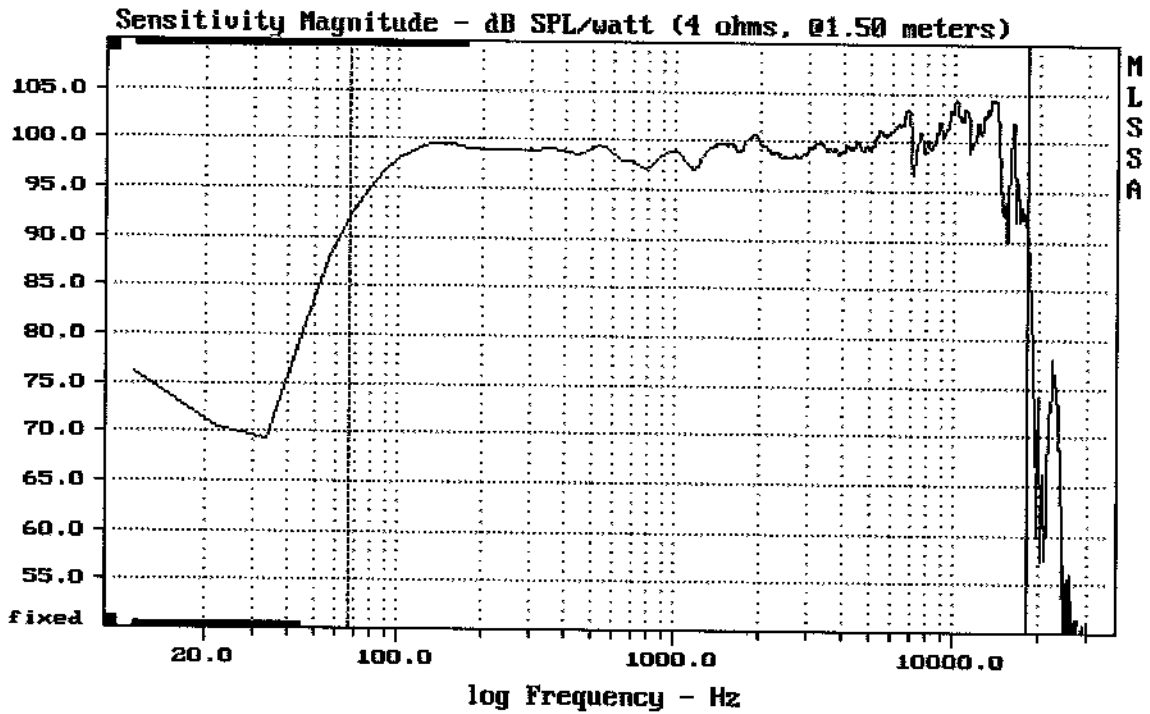

mean: 100.00, rms: 100.43, std: 2.43, max: 104.36, min: 89.54


~~FLOOR~~/FREEFIELD SWITCH

MLSSA: Frequency Domain

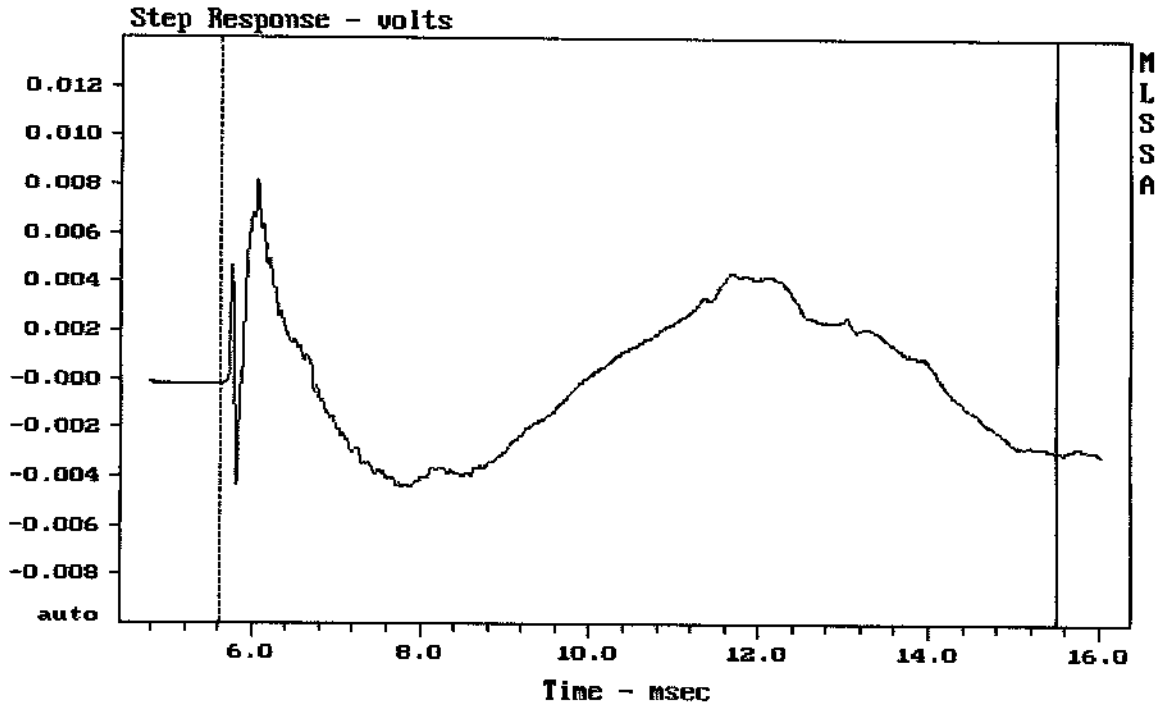

mean: 0.0001074, rms: 0.002845, std: 0.002843, max: 0.008123, min: -0.004399


NX10-SMA

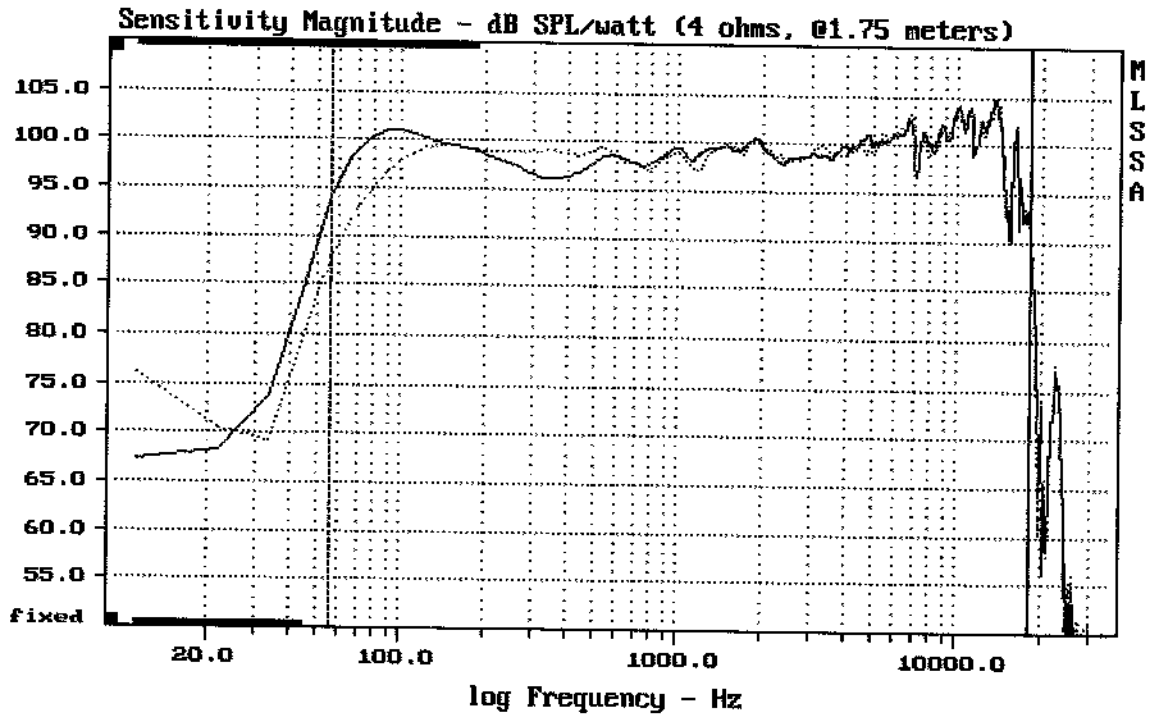


Overlay Compare: dev= +6.3/-2.9, std= 0.68, avg= 0.046

NX10-SMA

MLSSA: Frequency Domain

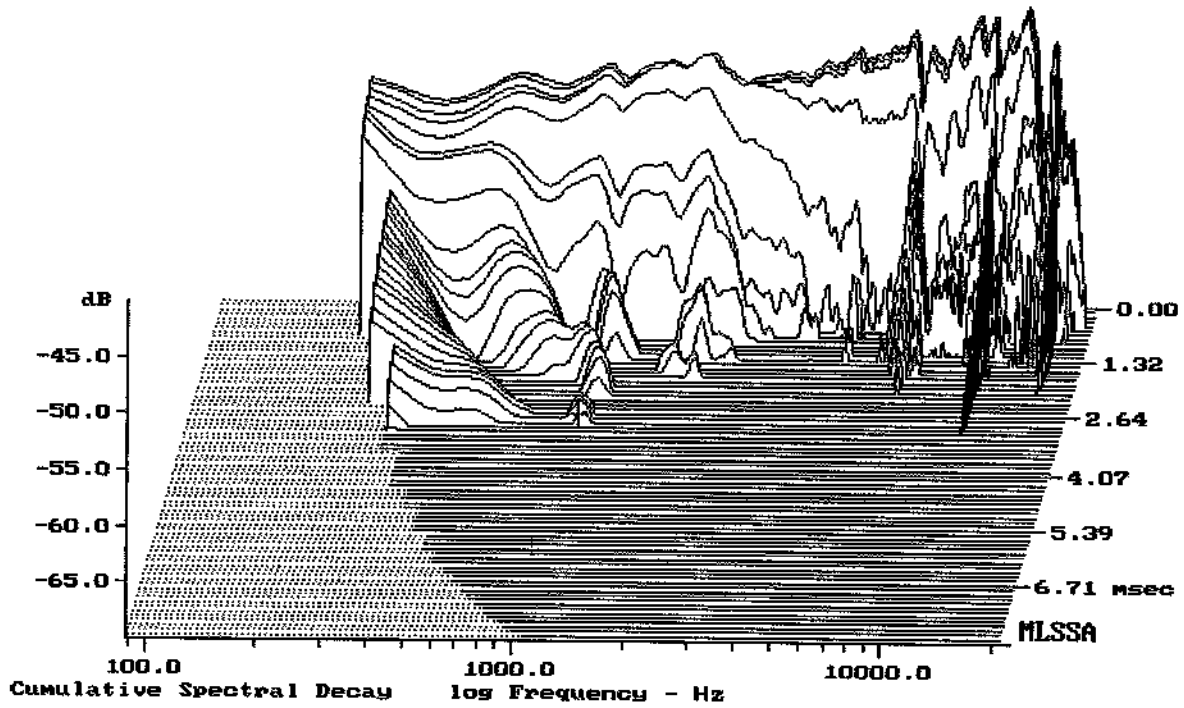


-69.18 dB, 1021 Hz (23), 2.860 msec (27)

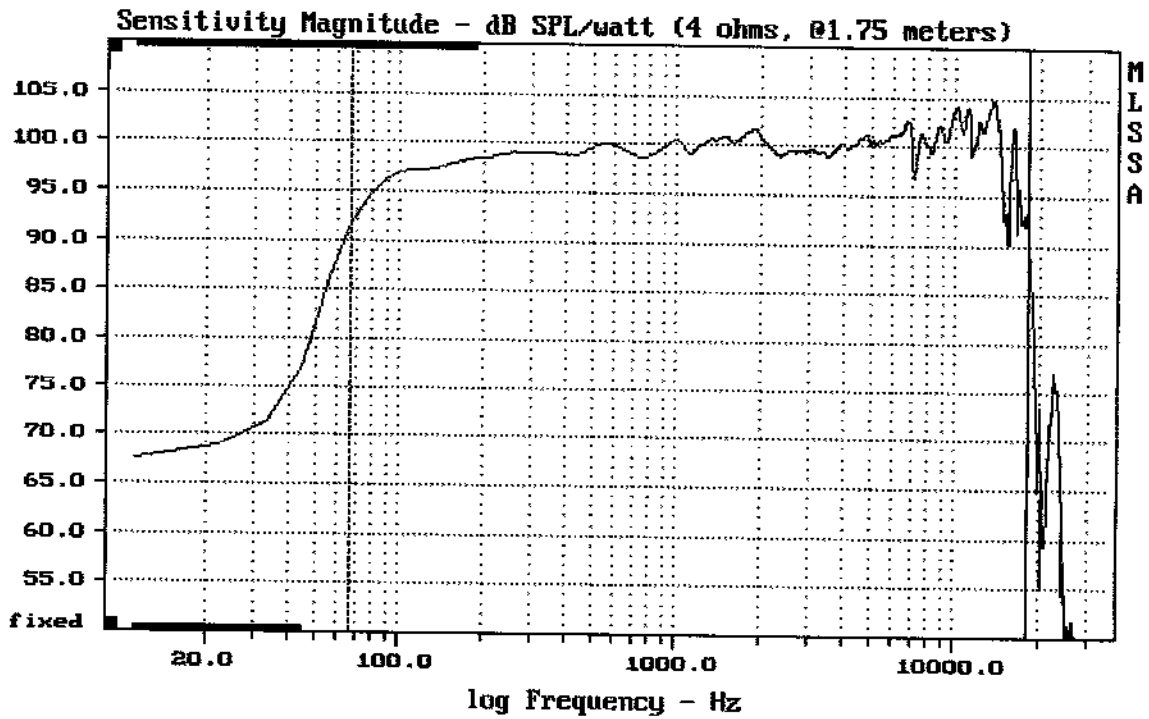

mean: 100.31, rms: 100.70, std: 2.33, max: 104.81, min: 90.16


NX10-SMA FLOOR

MLSSA: Frequency Domain

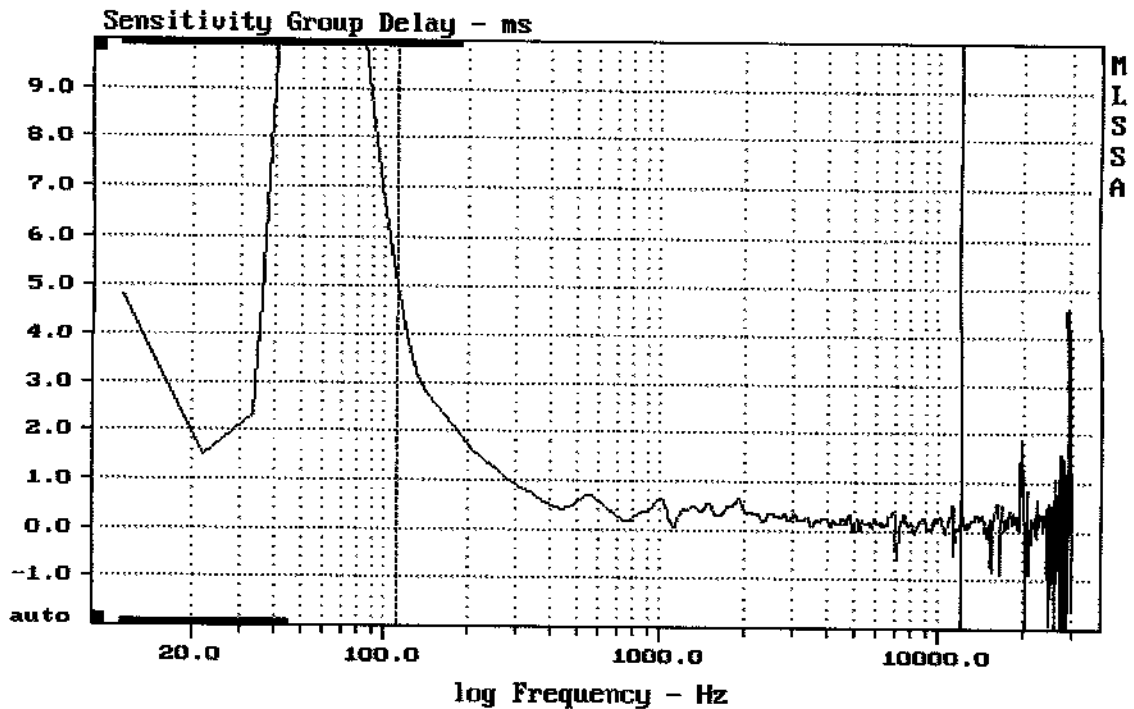

mean: 0.2417, rms: 0.3997, std: 0.3184, max: 5.019, min: -0.5923


NX10-SMA FLOOR

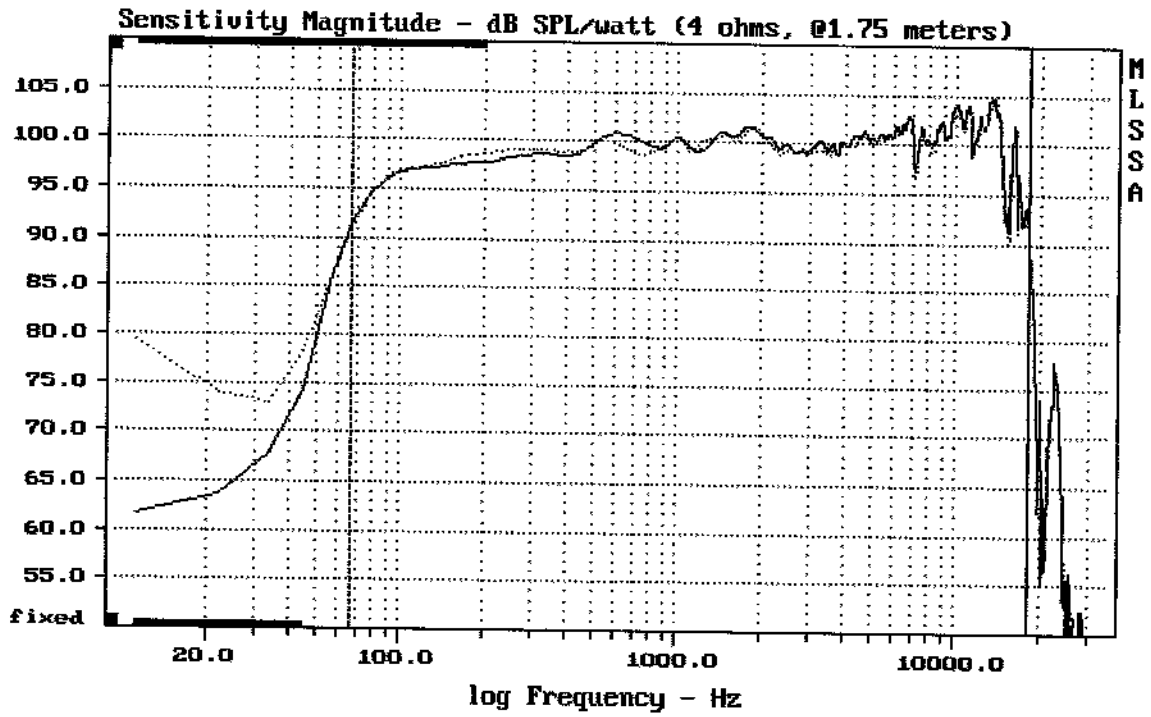

Overlay Compare: dev= +1.2/-1.2, std= 0.4, avg= 0.3


NX10-SMA FLOOR NORMAL/REVERSED /----

MLSSA: Frequency Domain

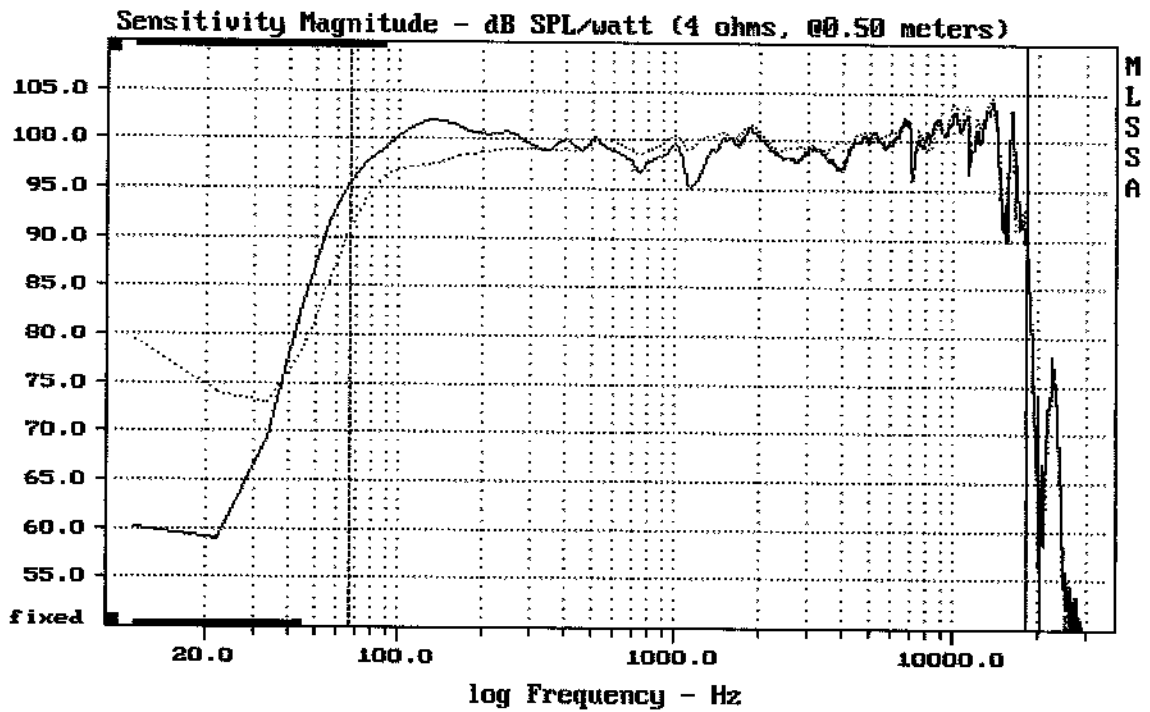

Overlay Compare: dev= +5.1/-3.5, std= 1.1, avg= -0.49


NX10-SMA FLOOR/FREE&NEAR FIELD /----

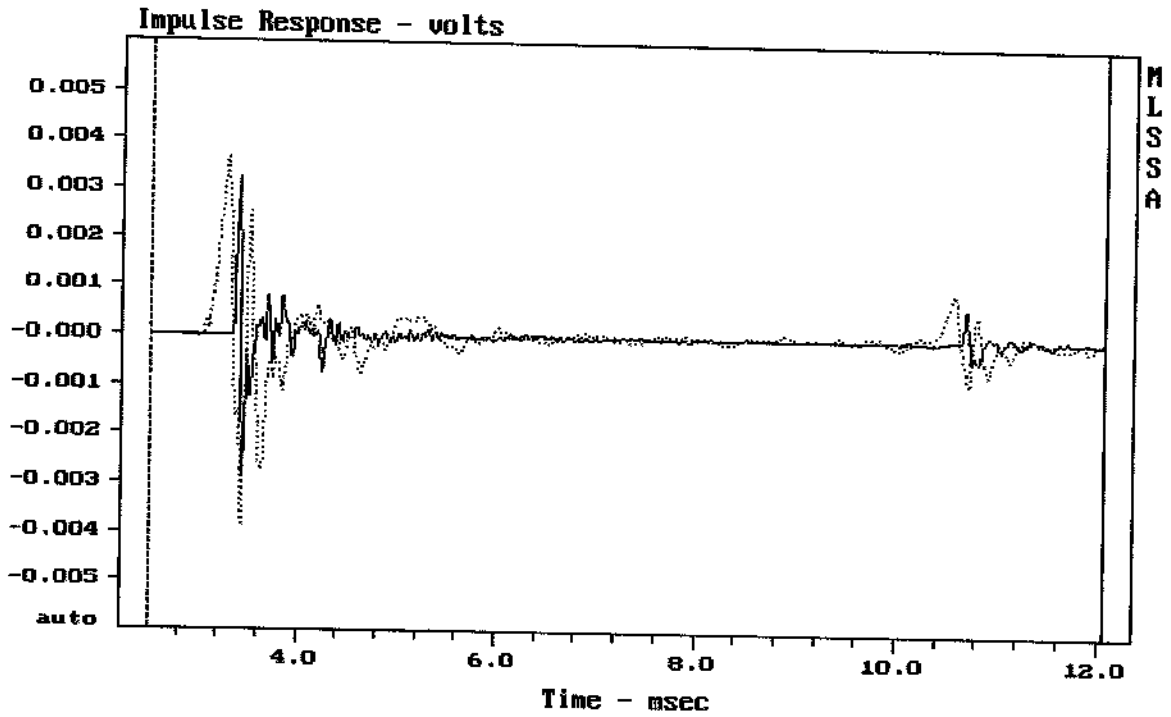

mean: $-2.77e-006$, rms: 0.0005648, std: 0.0005648, max: 0.003612, min: -0.00384


10" FROM NX10-SMA

MLSSA: Time Domain

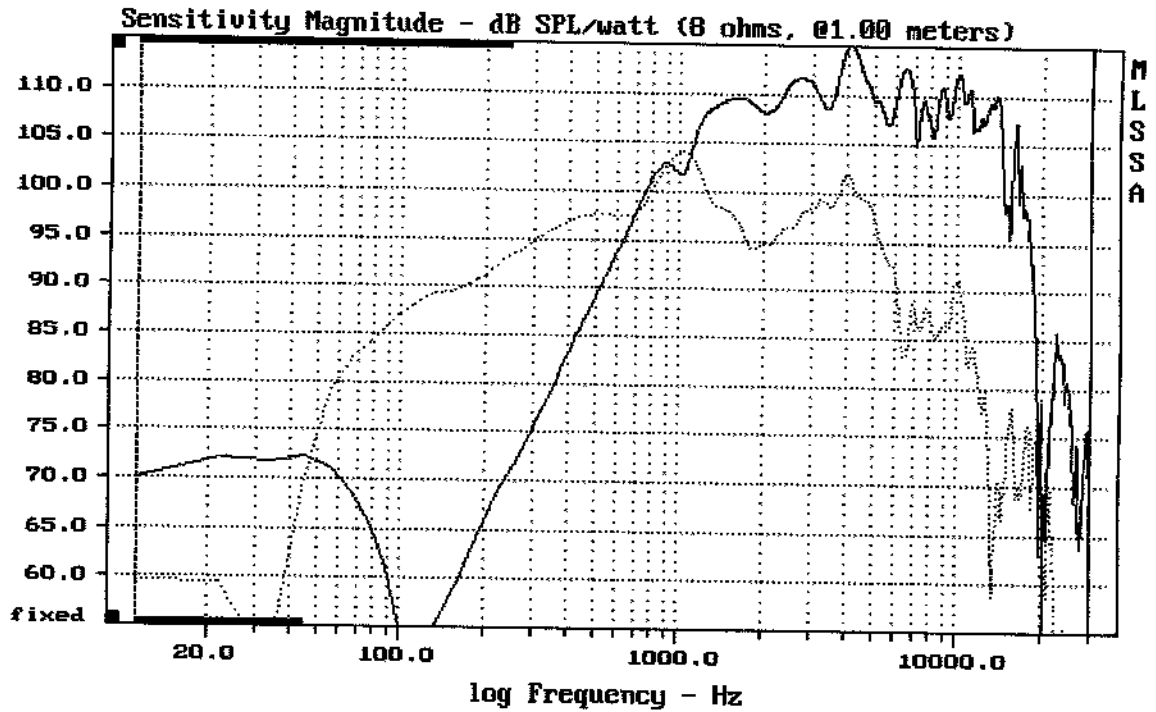

CURSOR: $\Delta y = -33.1255$ $x = 30007.1814$ (2704)


10" FROM NX10-SMA

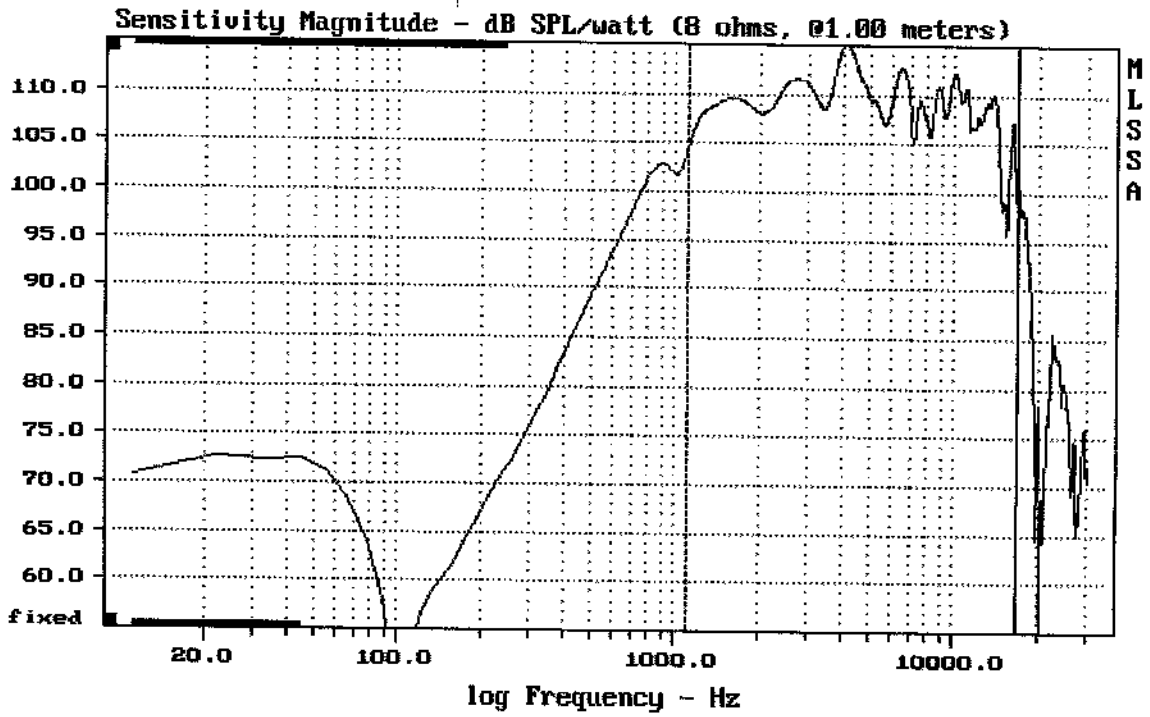


Level (1110:17001 Hz) = 109.90 dB SPL/watt (8 ohms, @1.00 meters)

10" FROM NX10-SMA

MLSSA: Frequency Domain

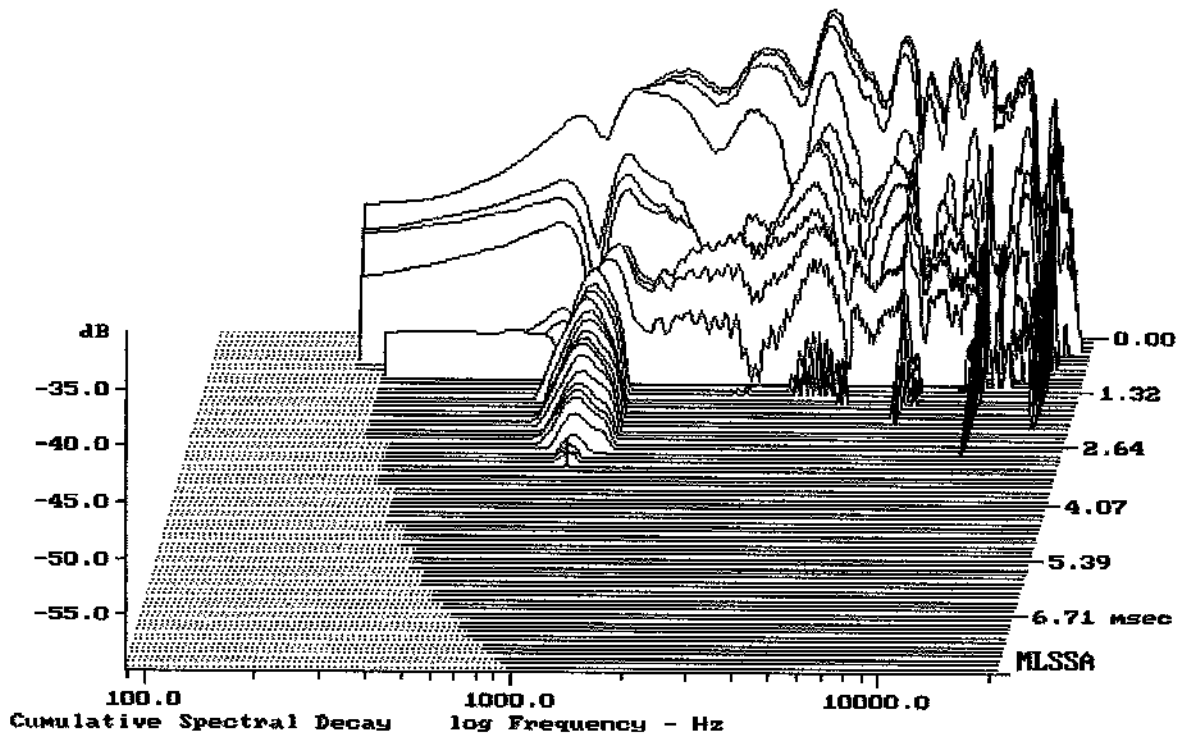


-59.05 dB, 977 Hz (22), 3.080 msec (29)

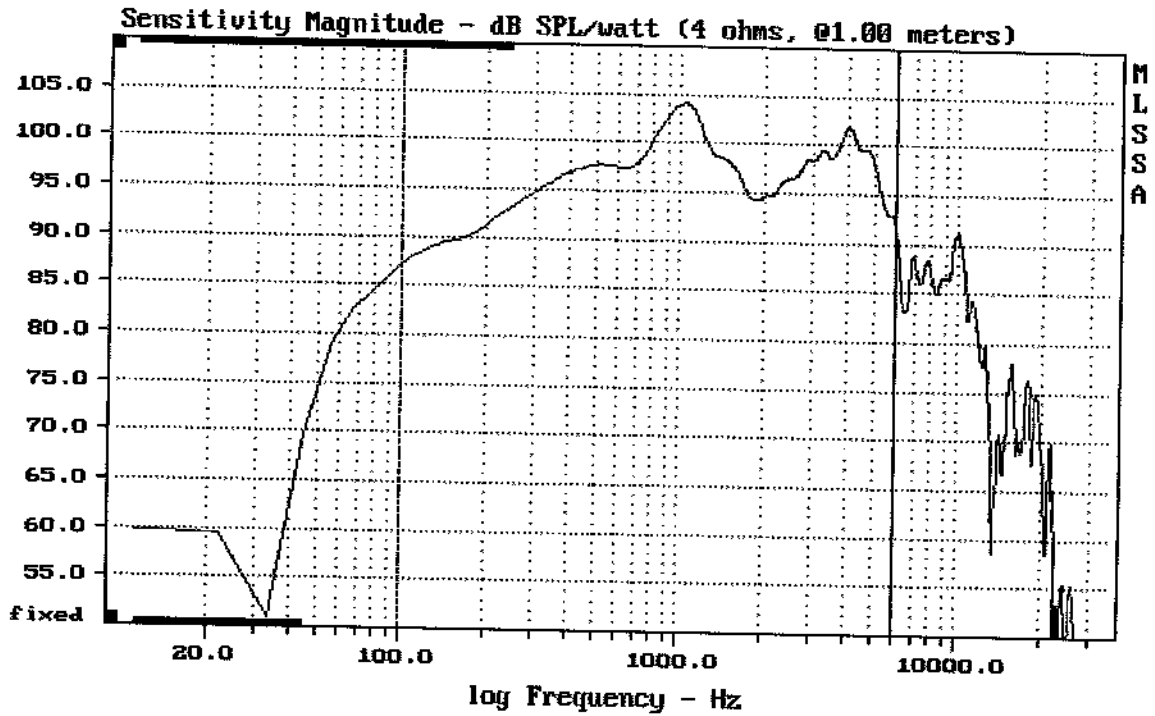

Level (100:6004 Hz) = 97.80 dB SPL/watt (4 ohms, @1.00 meters)

10" FROM NX10-SMA

MLSSA: Frequency Domain

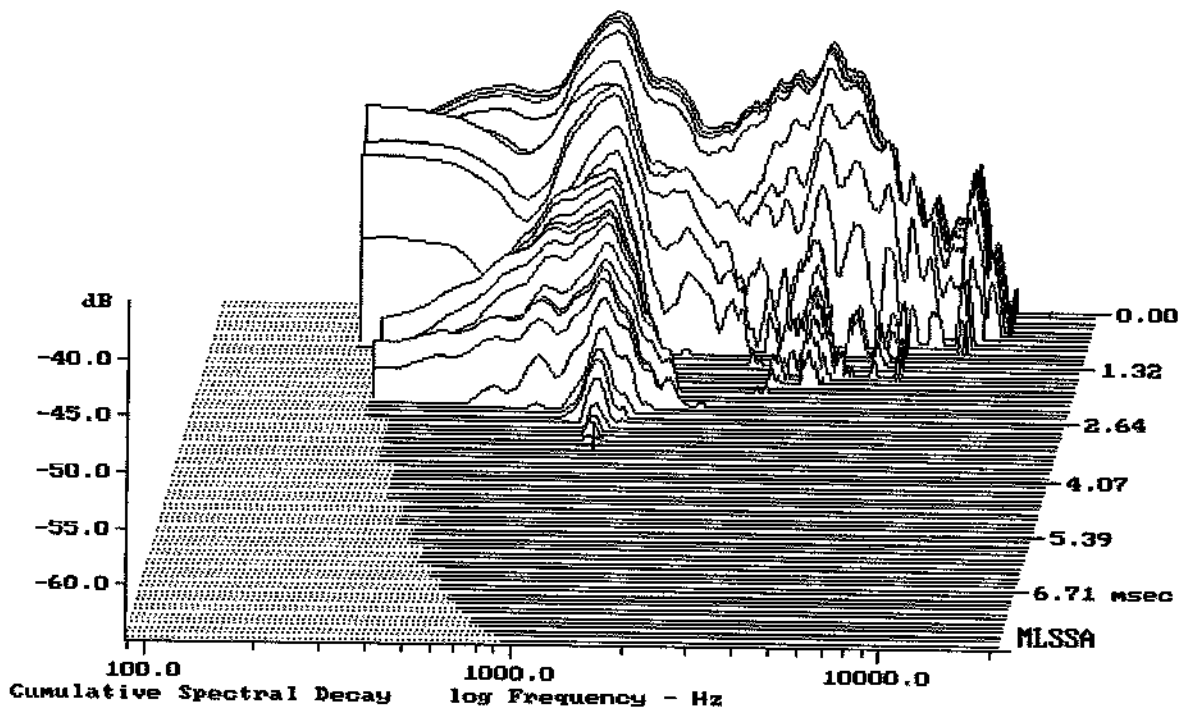

-64.70 dB, 1154 Hz (26), 3.190 msec (30)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.55	Ohms
2	Fs	78.03	Hz
3	Re	3.14	Ohms[dc]
4	Res	84.42	Ohms
5	Qms	6.74	
6	Qes	0.25	
7	Qts	0.24	
8	L1	0.26	mH
9	L2	0.57	mH
10	R2	1.94	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	27.36	liters
13	Mms	21.06	grams
14	Cms	198	$\mu\text{M}/\text{Newton}$
15	B1	11.37	Tesla-M
16	SPLref(Sd)	99.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 314.00 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.2% (-20% to -50% is recommended).

10" FROM NX10-SMA

MLSSA: Parameters

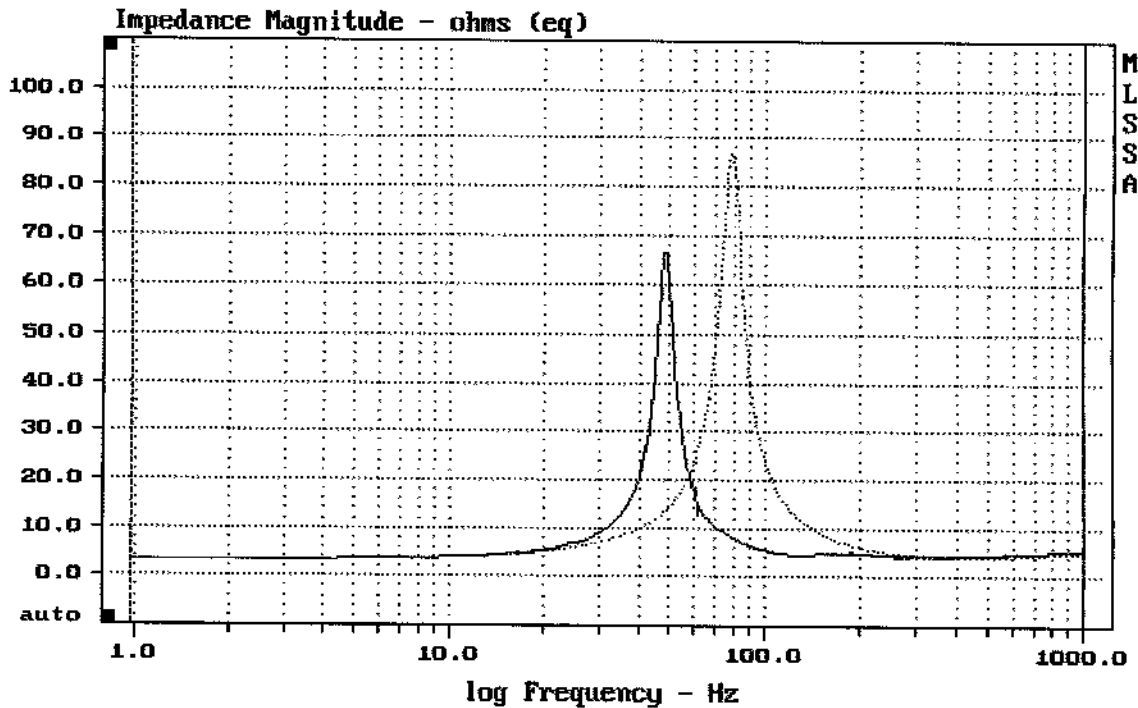

mean: 7.136, rms: 12.23, std: 9.937, max: 86.61, min: 3.285

MLSSA: Frequency Domain