



**Sensitivity Magnitude - dB SPL/watt (8 ohms, @1.50 meters)**

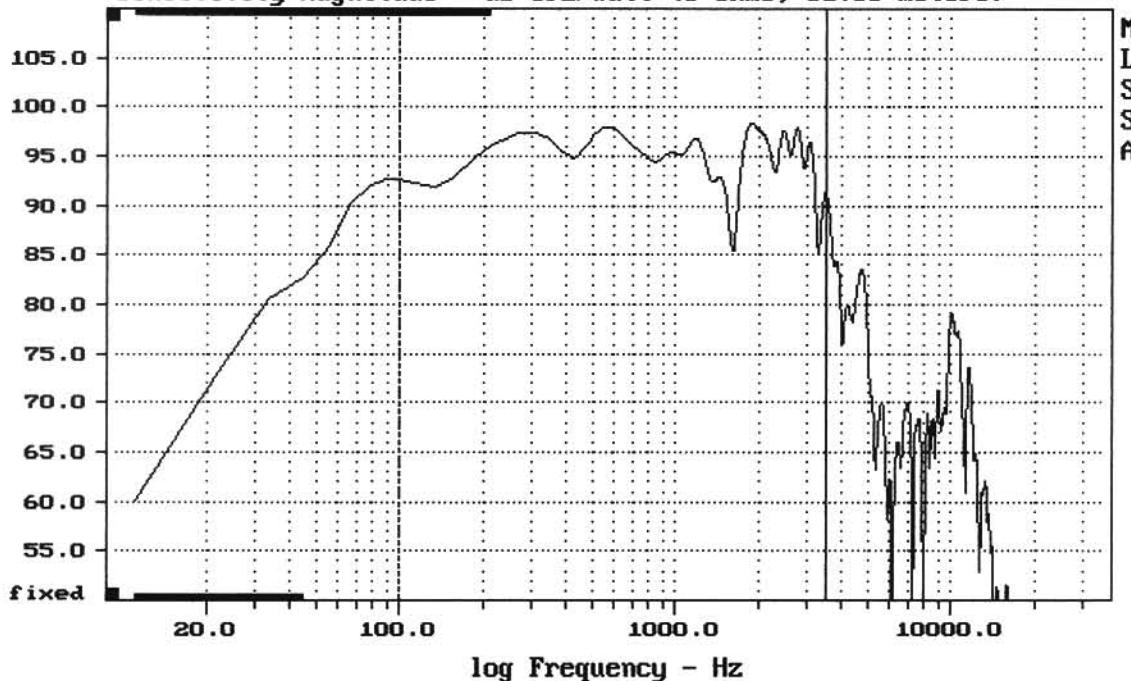

**Level (100:3507 Hz) = 95.48 dB SPL/watt (8 ohms, @1.50 meters)**

15WS600

**MLSSA: Frequency Domain**

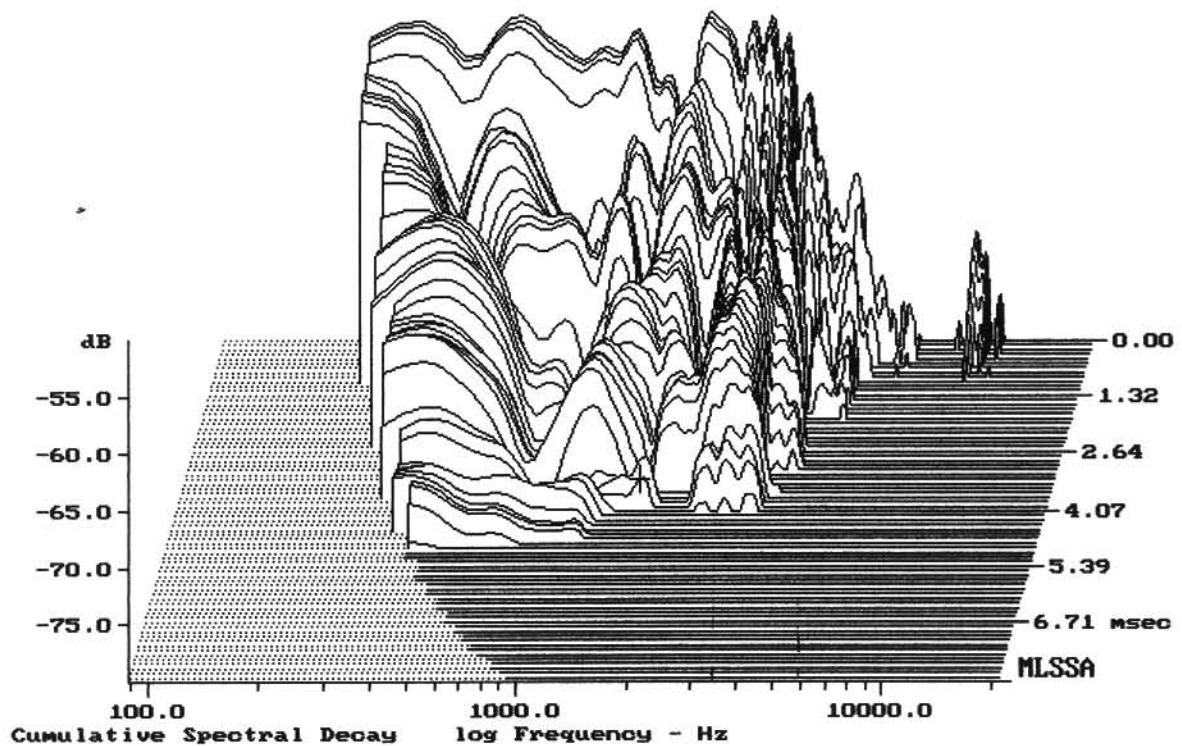

**-77.53 dB, 1598 Hz (36), 3.960 msec (37)**

MLSSA SPO 4.0D #960903-3057-3075

## Measured Data

## QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.85	Ohms
2	Fs	37.61	Hz
3	Re	6.03	Ohms[dc]
4	Res	311.69	Ohms
5	Qms	20.36	
6	Qes	0.39	
7	Qts	0.39	
8	L1	1.20	mH
9	L2	1.54	mH
10	R2	7.42	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	178.27	liters
13	Mms	97.09	grams
14	Cms	184	$\mu\text{M}/\text{Newton}$
15	B1	18.74	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.4% (-20% to -50% is recommended).

15WS600

MLSSA: Parameters

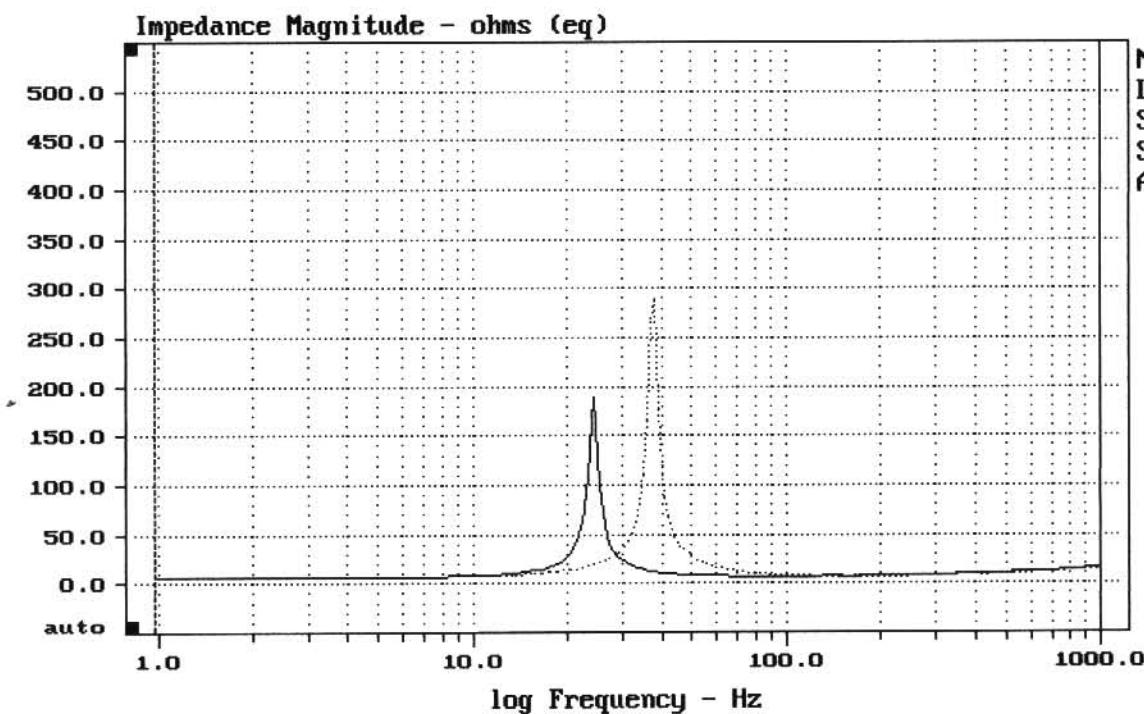

DTTO

MLSSA: Frequency Domain