


Level (100:2009 Hz) = 94.04 dB SPL/watt (8 ohms, 01.50 meters)

15BG100

MLSSA: Frequency Domain

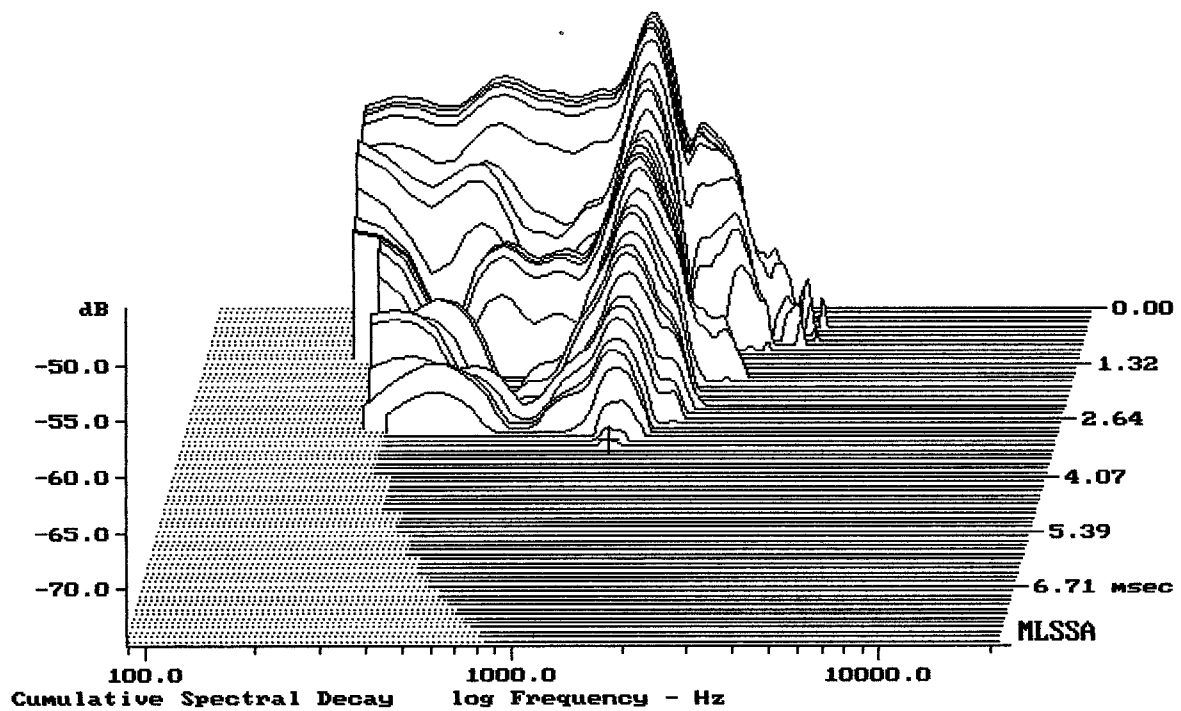

-74.49 dB, 1287 Hz (29), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	38.56	Hz
3	Re	5.05	Ohms[dc]
4	Res	48.25	Ohms
5	Qms	5.03	
6	Qes	0.53	
7	Qts	0.48	
8	L1	1.21	mH
9	L2	1.44	mH
10	R2	5.99	Ohms
11	RMSE-load	0.47	Ohms
12	Vas(Sd)	78.36	liters
13	Mms	210.19	grams
14	Cms	81	$\mu\text{M}/\text{Newton}$
15	B1	22.10	Tesla-M
16	SPLref(Sd)	91.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.9% (-20% to -50% is recommended).

15BG100

MLSSA: Parameters

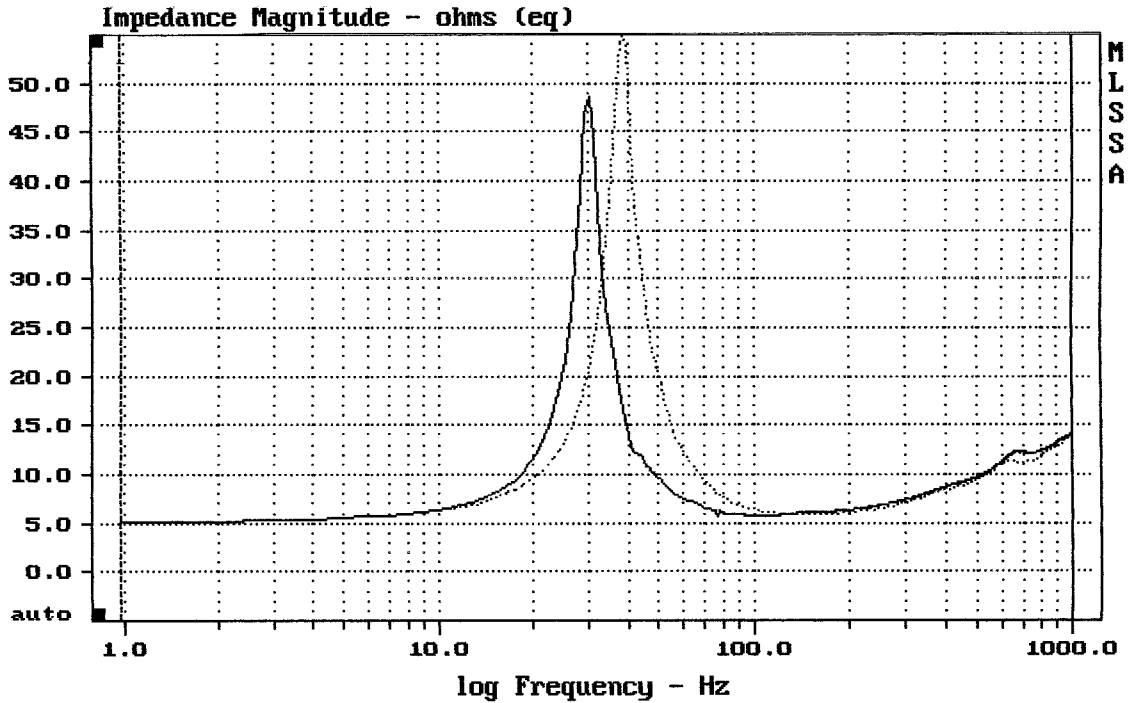

mean: 10.24, rms: 11.23, std: 4.606, max: 55.6, min: 5.159

MLSSA: Frequency Domain