

MLSSA SPD 4.W #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	57.09	Hz
3	Re	5.71	Ohms[dc]
4	Res	62.74	Ohms
5	Qms	5.52	
6	Qes	0.50	
7	Qts	0.46	
8	L1	0.46	mH
9	L2	1.28	mH
10	R2	8.06	Ohms
11	RMSE-load	0.52	Ohms
12	Vas(Sd)	128.76	liters
13	Mms	61.96	grams
14	Cms	125	$\mu\text{M}/\text{Newton}$
15	B1	15.90	Tesla-M
16	SPLref(Sd)	98.6	dB[Re]
17	Rub-index	0.01	


Method: Mass-loaded (80.00 grams)
 DCR mode: Measure (-0.27 ohms)

Area (Sd): 855.00 sq cm
 QC file: CLOSED

Analysis successful. Shift in Fs = -30.8% (-20% to -50% is recommended).


B+C 15CX

MLSSA: Parameters

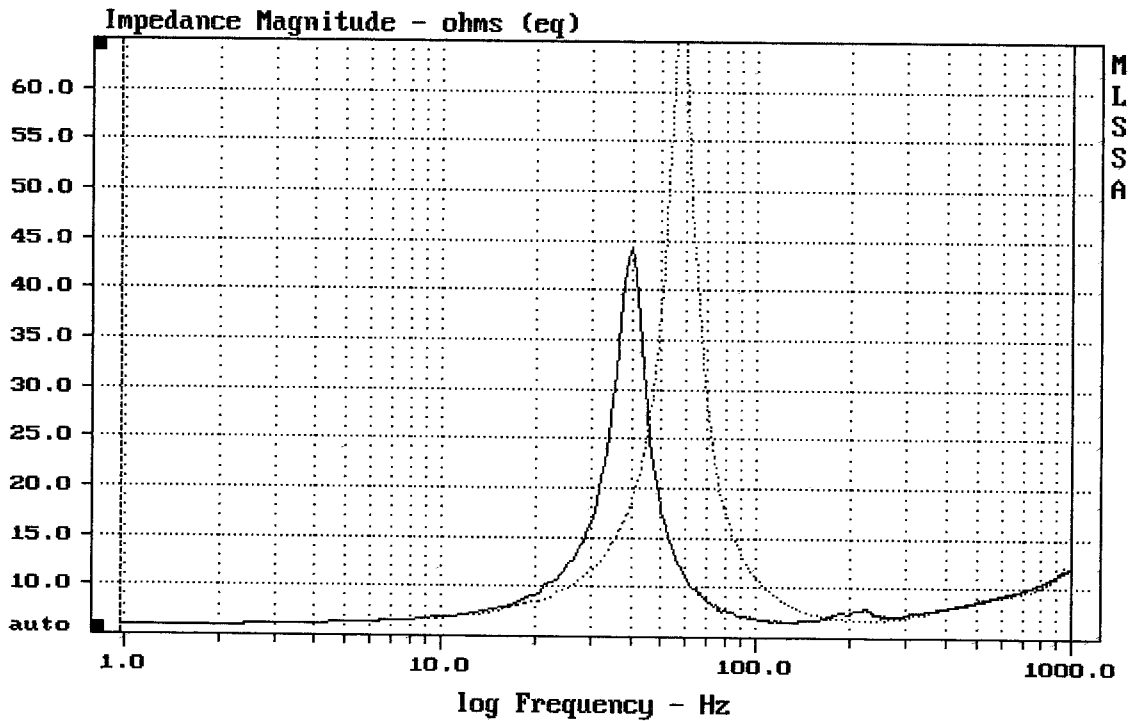

CURSOR: dy = -0.0486298 x = 1000.9766 (1025)

MLSSA: Frequency Domain

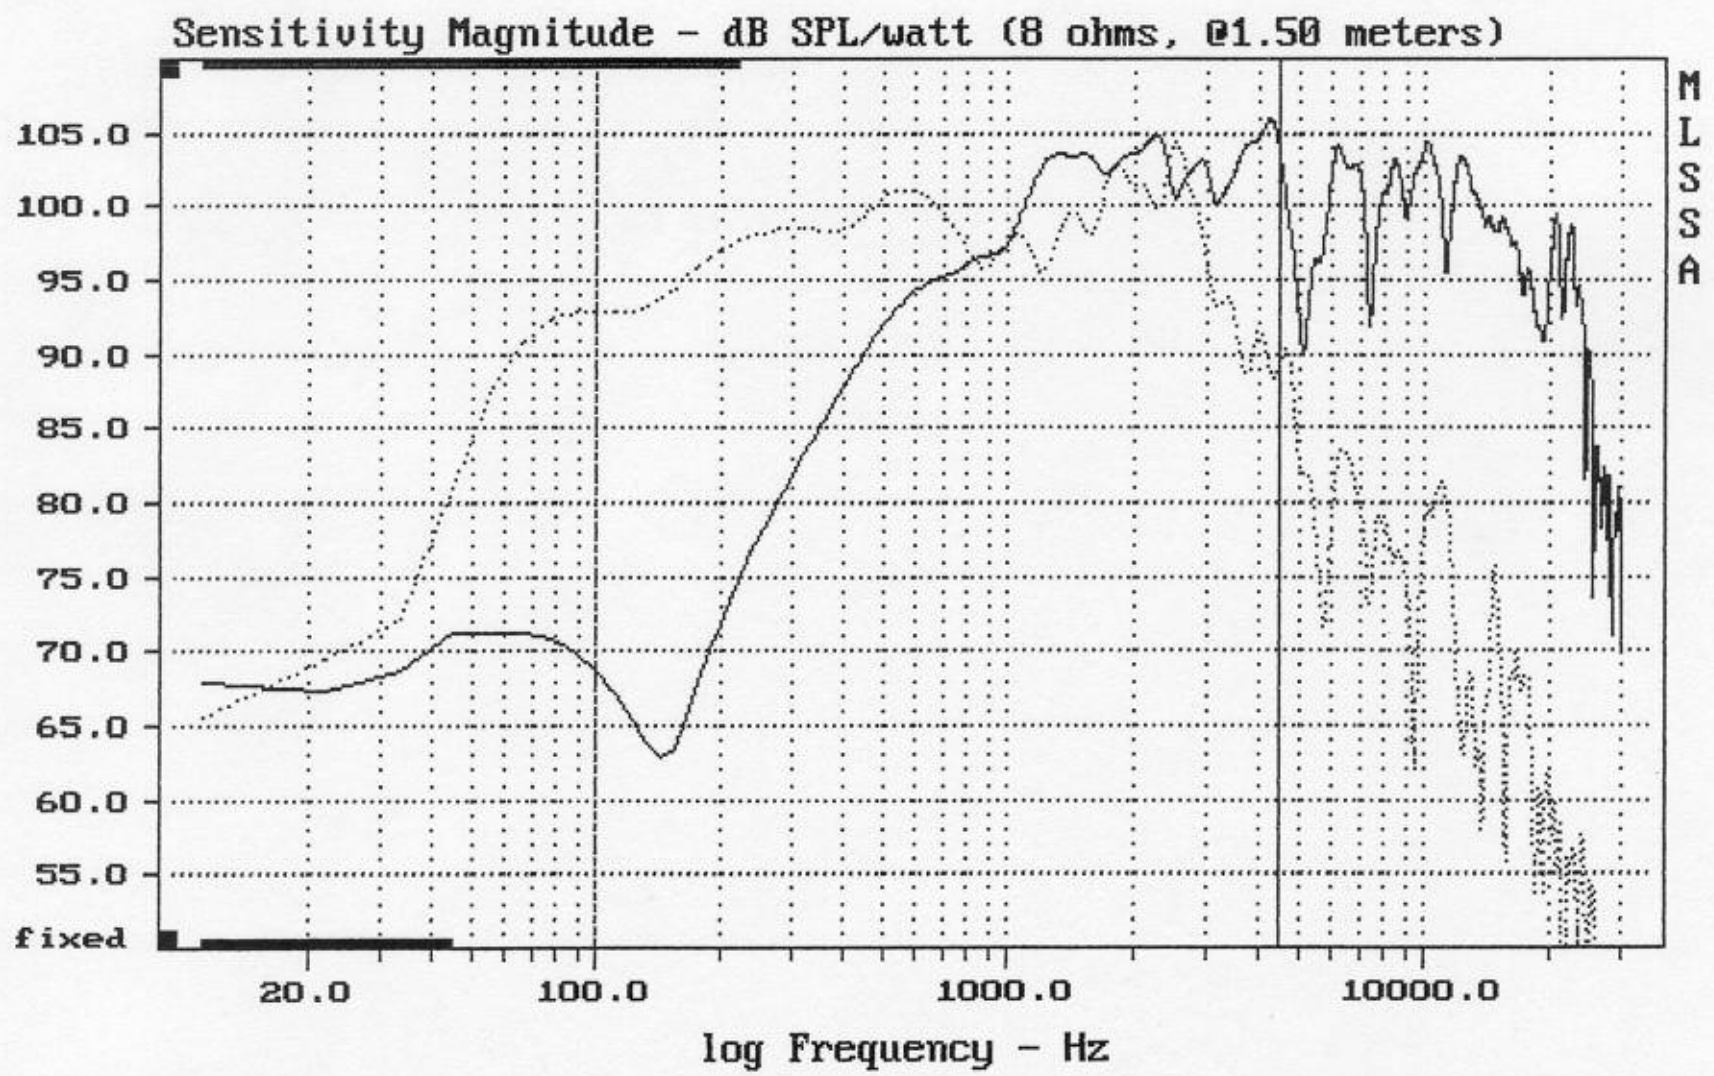

Level (100:4506 Hz) = 98.45 dB SPL/watt (8 ohms, @1.50 meters)

B+C 15CX