


Level (100:3007 Hz) = 95.61 dB SPL/watt (4 ohms, @1.50 meters)

15PS76-4

MLSSA: Frequency Domain

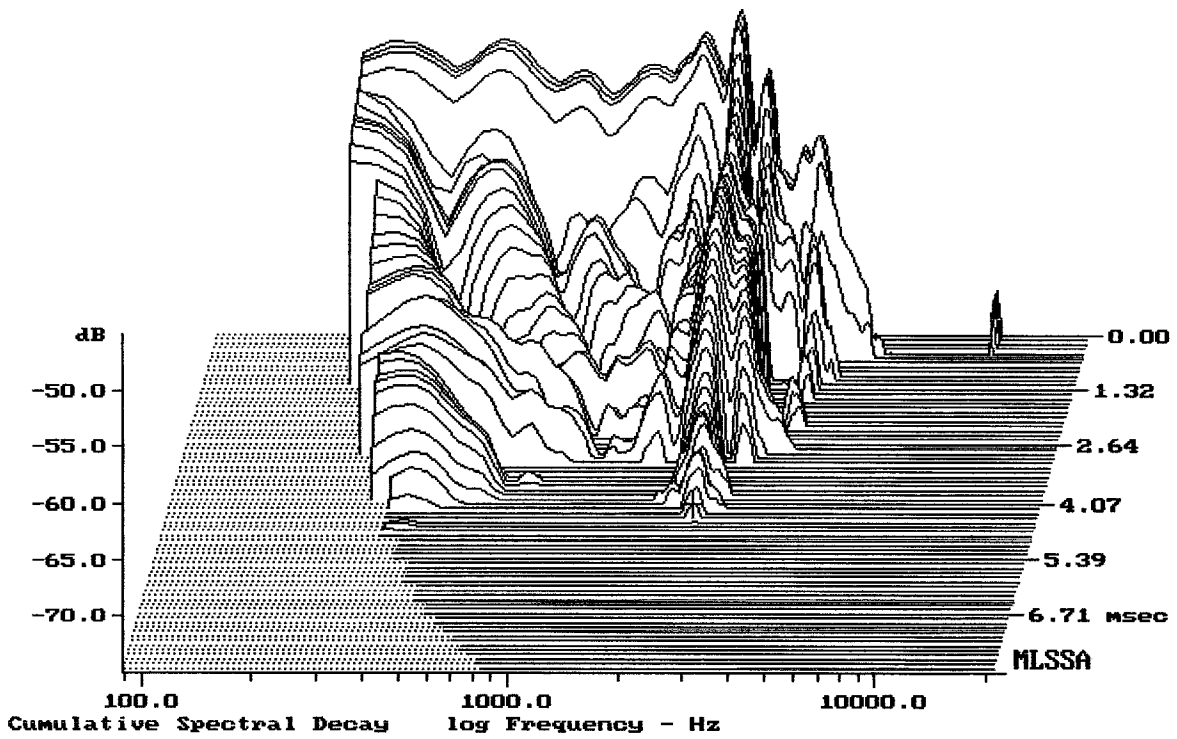

-73.77 dB, 2441 Hz (55), 4.400 msec (41)

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|----------------|
| 1 | RMSE-free | 0.37 | Ohms |
| 2 | Fs | 42.06 | Hz |
| 3 | Re | 3.06 | Ohms[dc] |
| 4 | Res | 106.88 | Ohms |
| 5 | Qms | 9.60 | |
| 6 | Qes | 0.28 | |
| 7 | Qts | 0.27 | |
| 8 | L1 | 0.77 | mH |
| 9 | L2 | 1.13 | mH |
| 10 | R2 | 3.89 | Ohms |
| 11 | RMSE-load | 0.69 | Ohms |
| 12 | Vas(Sd) | 146.47 | liters |
| 13 | Mms | 106.65 | grams |
| 14 | Cms | 134 | μ M/Newton |
| 15 | B1 | 17.71 | Tesla-M |
| 16 | SPLref(Sd) | 97.8 | dB[Re] |
| 17 | Rub-index | 0.05 | |

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.1% (-20% to -50% is recommended).

15PS76-4

MLSSA: Parameters

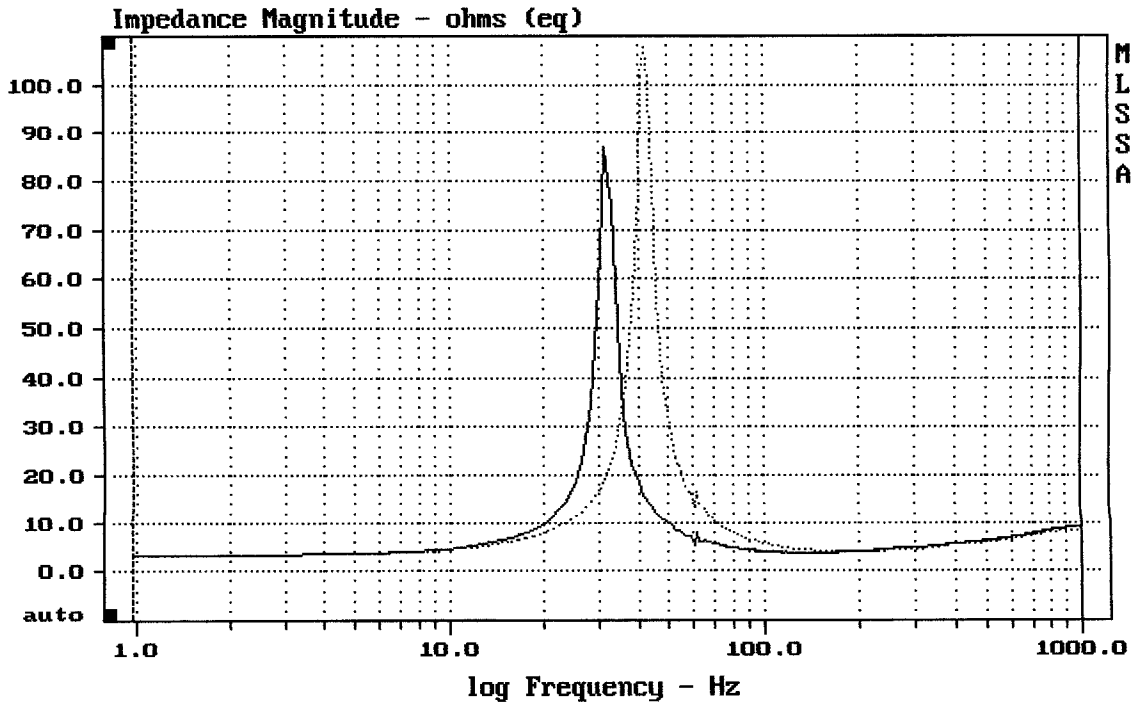

mean: 7.452, rms: 10.88, std: 7.932, max: 107.5, min: 3.23

MLSSA: Frequency Domain