


Level (100:4406 Hz) = 98.09 dB SPL/watt (8 ohms, @1.50 meters)

15NA100

7-9-89 7:03 PM

MLSSA: Frequency Domain

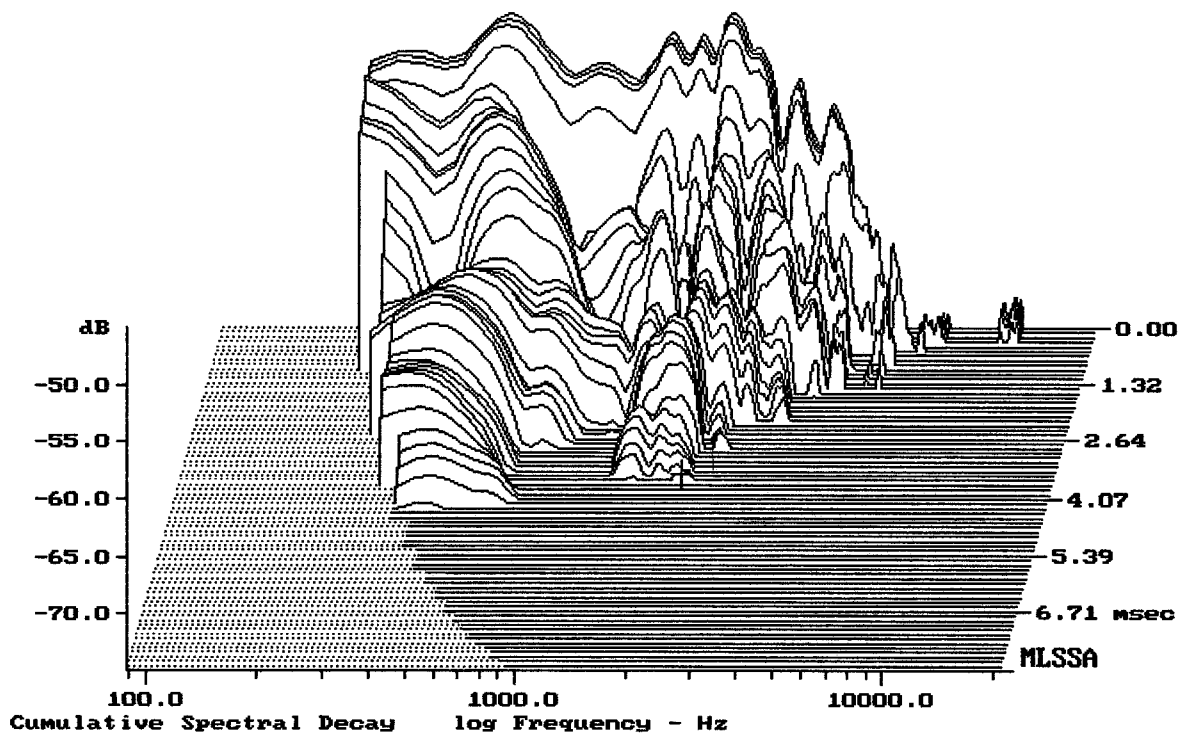

-74.47 dB, 2042 Hz (46), 3.630 msec (34)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.36	Ohms
2	Fs	56.46	Hz
3	Re	5.31	Ohms[dc]
4	Res	93.25	Ohms
5	Qms	6.28	
6	Qes	0.36	
7	Qts	0.34	
8	L1	0.75	mH
9	L2	1.49	mH
10	R2	6.43	Ohms
11	RMSE-load	0.85	Ohms
12	Vas(Sd)	78.66	liters
13	Mms	110.21	grams
14	Cms	72	$\mu\text{M}/\text{Newton}$
15	B1	24.09	Tesla-M
16	SPLref(Sd)	97.8	dB[Re]
17	Rub-index	0.29	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).

15NA100

MLSSA: Parameters

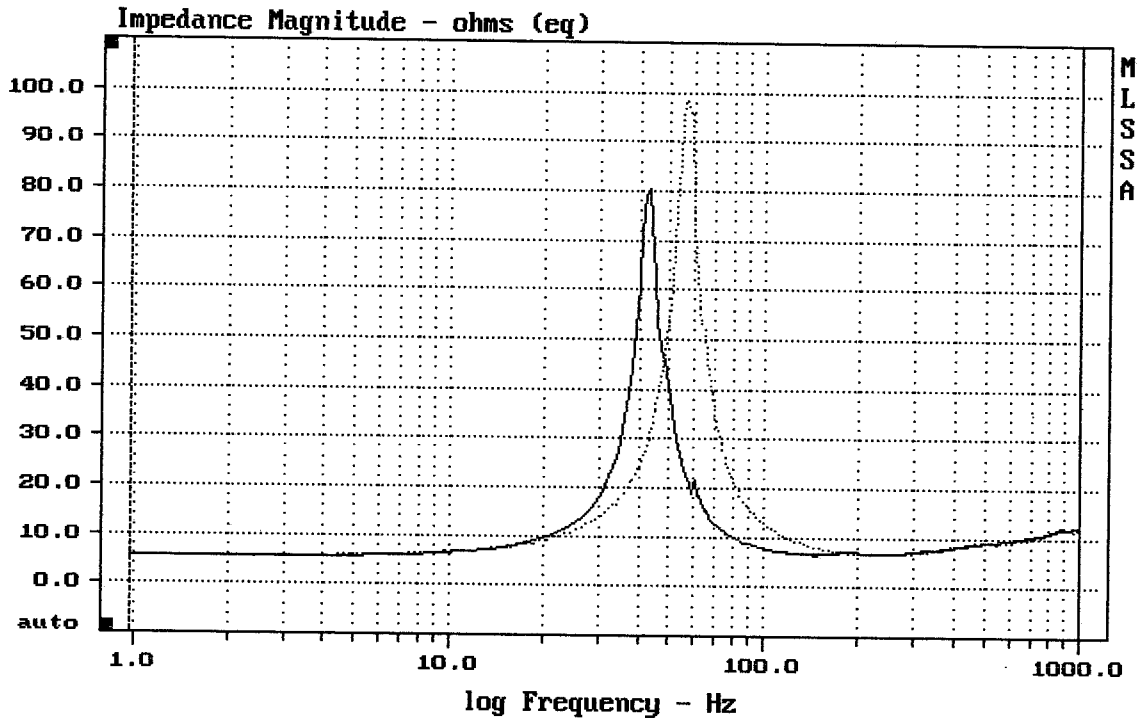

mean: 11.07, rms: 14.52, std: 9.4, max: 98.23, min: 5.448

7-4-89 11:03 PM

MLSSA: Frequency Domain