

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.54	Ohms
2	Fs	45.03	Hz
3	Re	5.75	Ohms[dc]
4	Res	45.33	Ohms
5	Qms	2.88	
6	Qes	0.37	
7	Qts	0.32	
8	L1	0.96	mH
9	L2	1.49	mH
10	R2	6.48	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	116.29	liters
13	Mms	103.84	grams
14	Cms	120	$\mu\text{M}/\text{Newton}$
15	Bl	21.49	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.5% (-20% to -50% is recommended).


COL15XB

MLSSA: Parameters

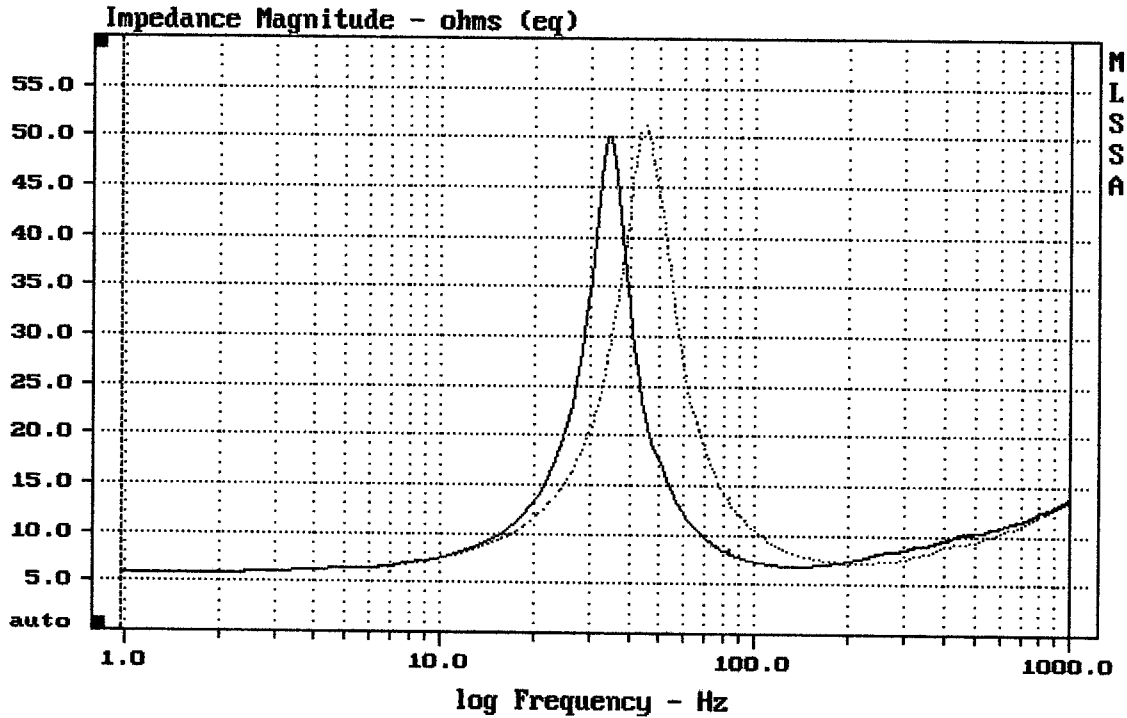

CURSOR: dy = -0.272249 x = 1000.9766 (1025)

MLSSA: Frequency Domain

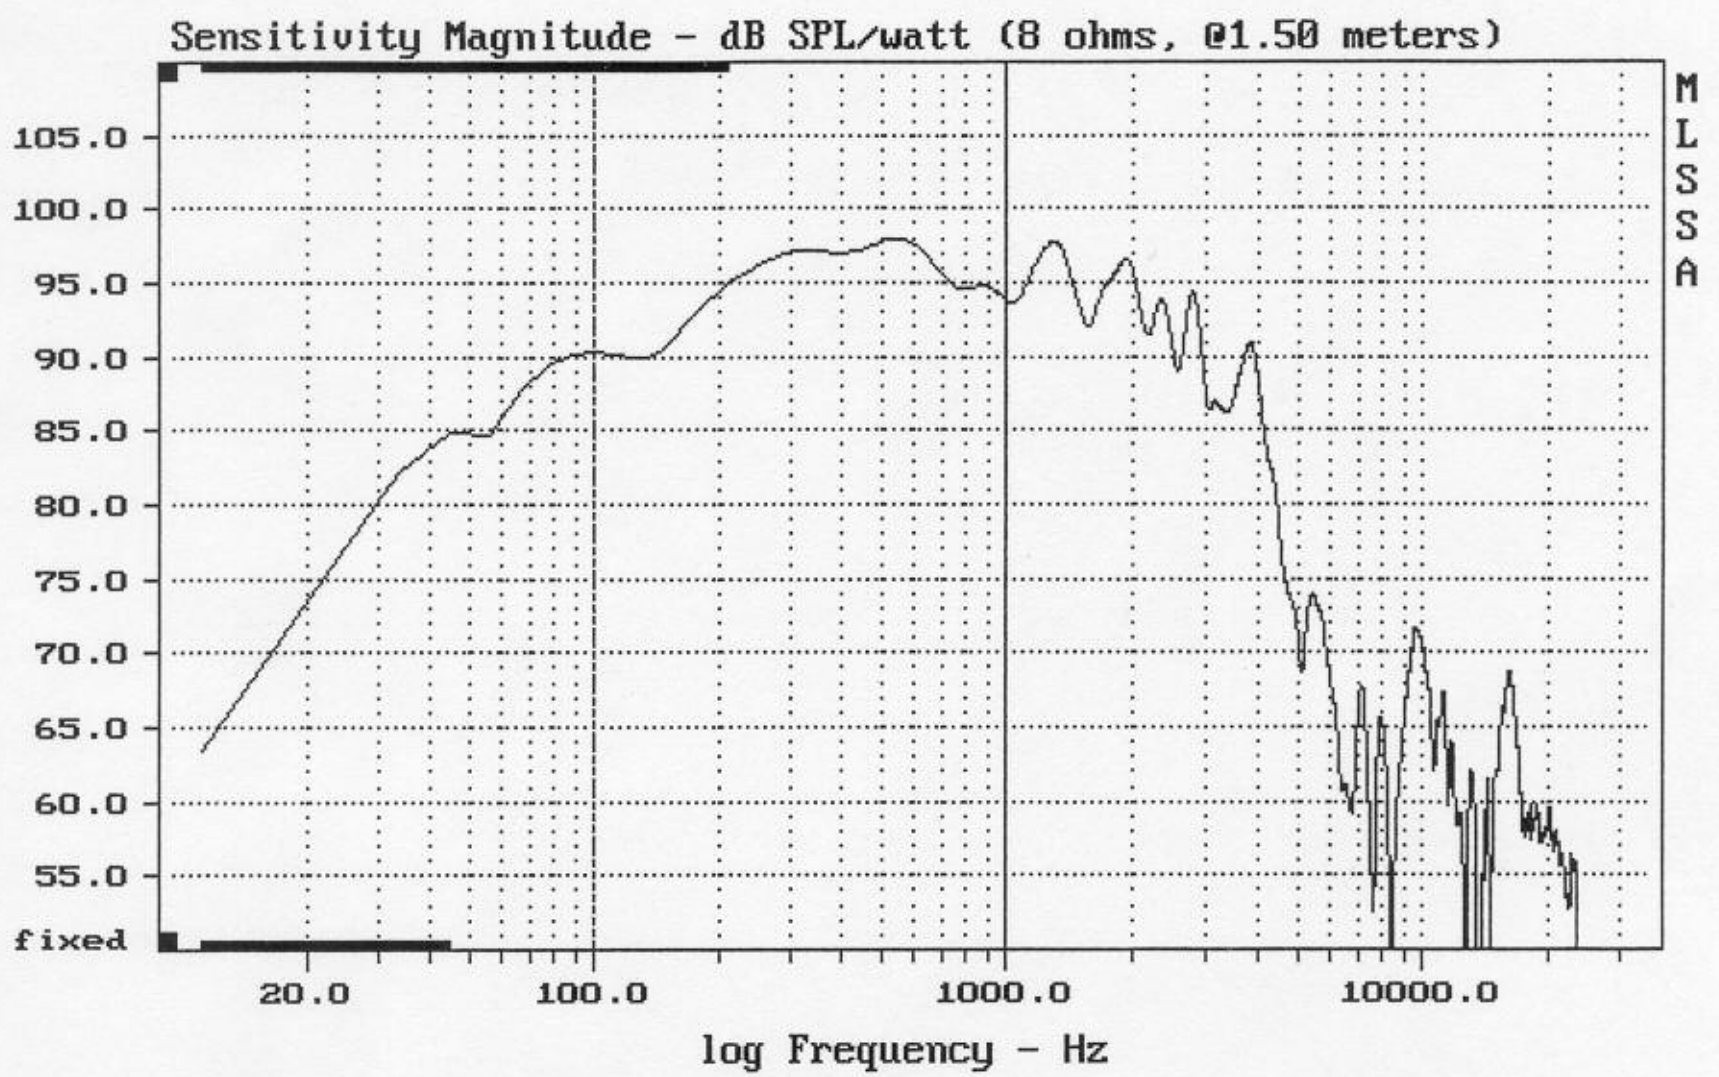

Level (100:999 Hz) = 95.41 dB SPL/watt (8 ohms, @1.50 meters)

FANE COL15XB