



Level (78:21196 Hz) = 94.47 dB SPL/watt (8 ohms, @1.40 meters)

EAW JF10

MLSSA: Frequency Domain

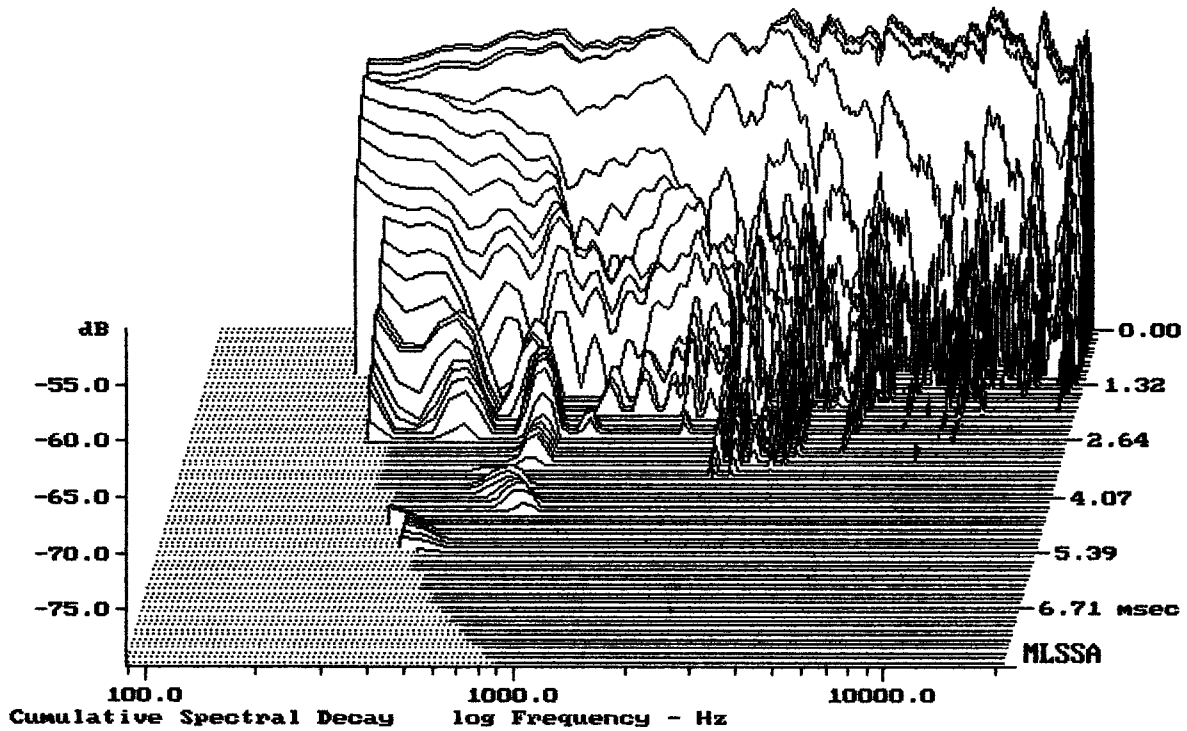

-79.24 dB, 2441 Hz (55), 3.520 msec (33)

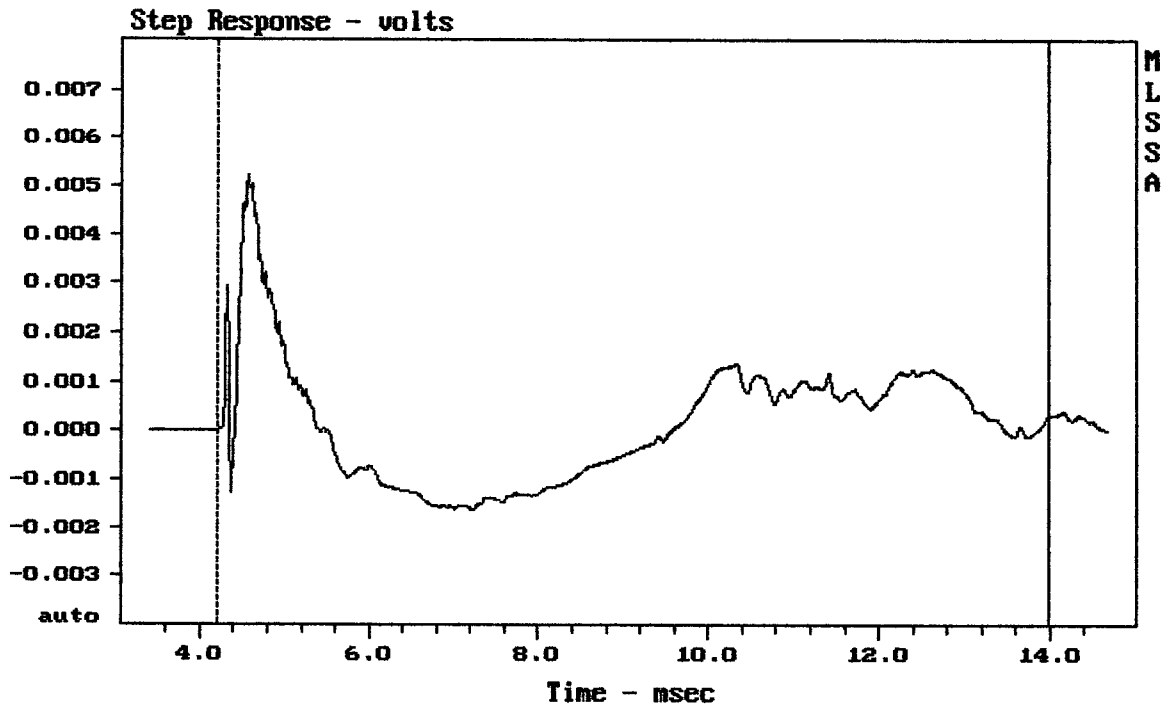


---

mean: 0.0001413, rms: 0.001257, std: 0.001249, max: 0.005219, min: -0.001632

---

EAW JF10

MLSSA: Time Domain

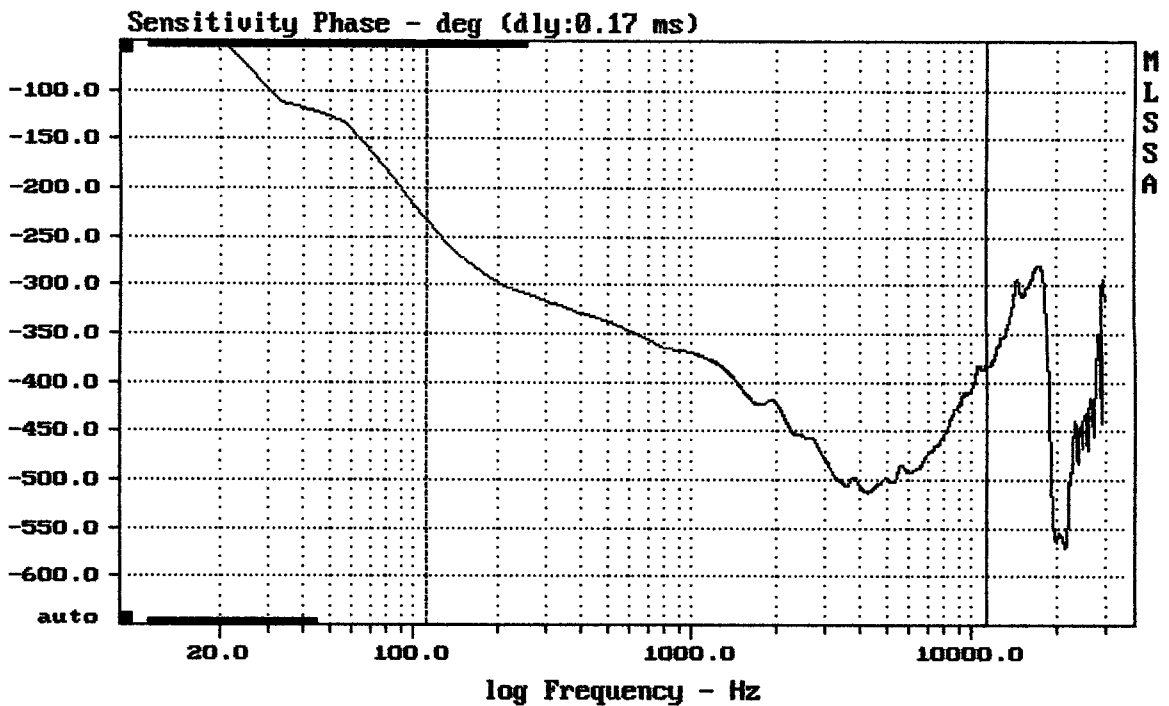


---

mean: -442.5, rms: 445.6, std: 52, max: -233.2, min: -512.7

---

EAW JF10

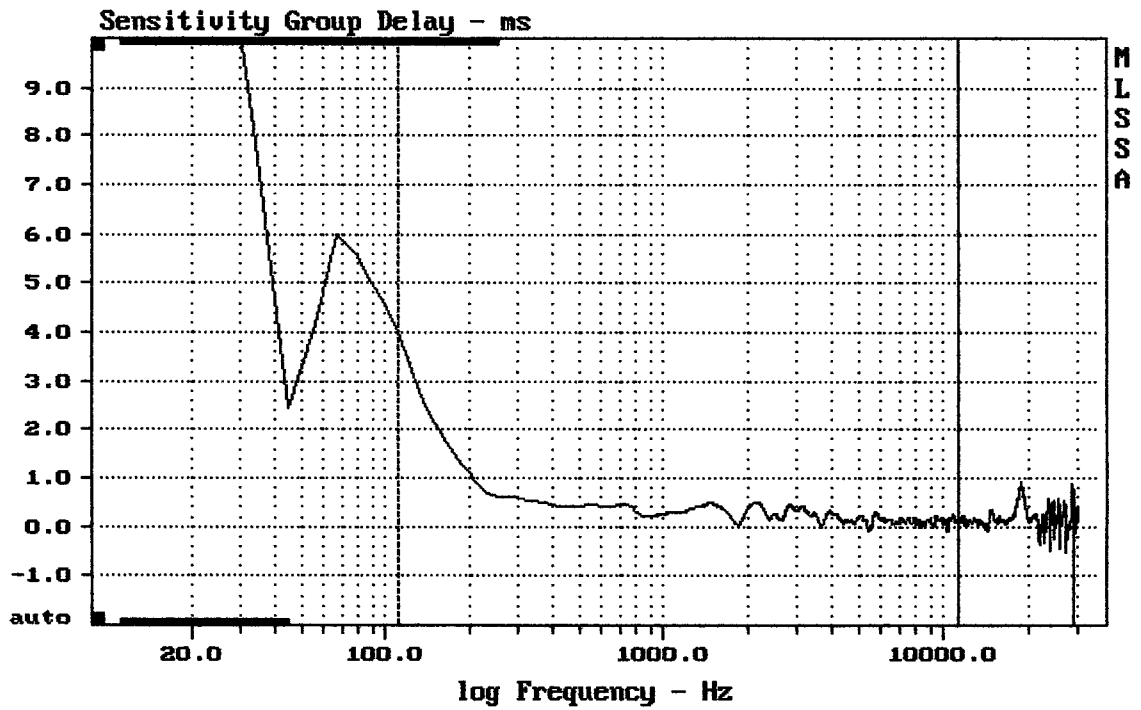


---

mean: 0.2101, rms: 0.3265, std: 0.2499, max: 3.997, min: -0.1012

---

EAW JF10

MLSSA: Frequency Domain

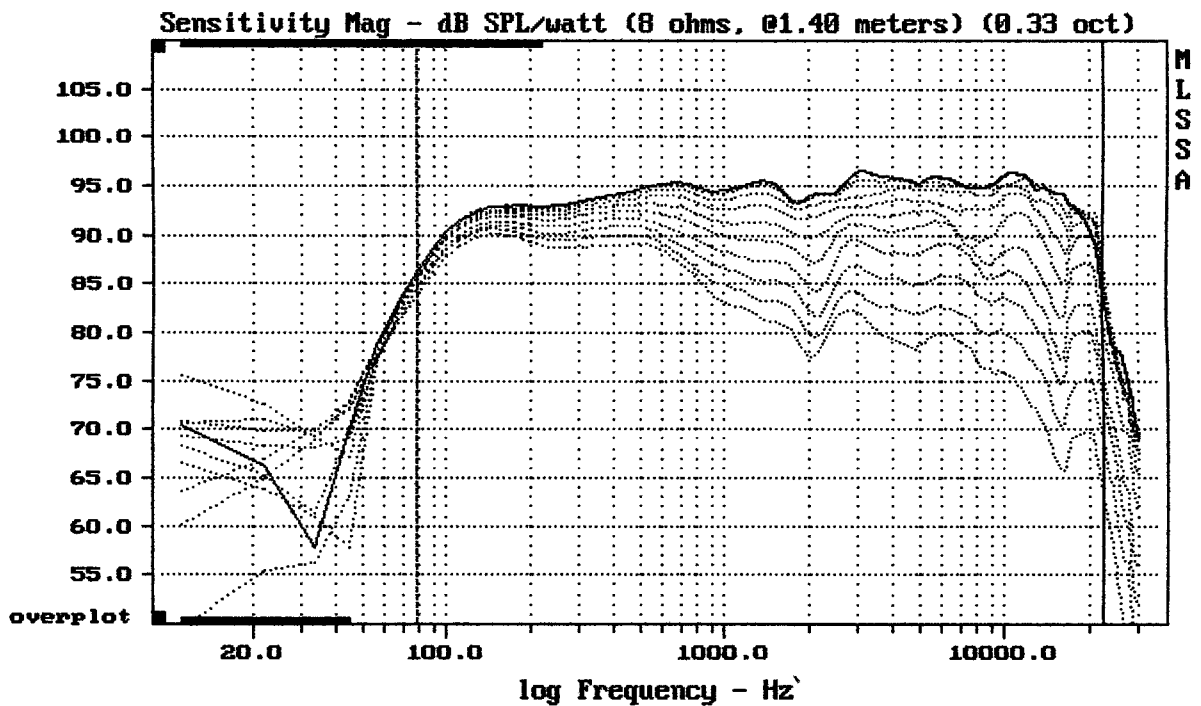


---

Overlay Compare: dev= +17/-8.6, std= 4.9, avg= -20

---

EAW JF10

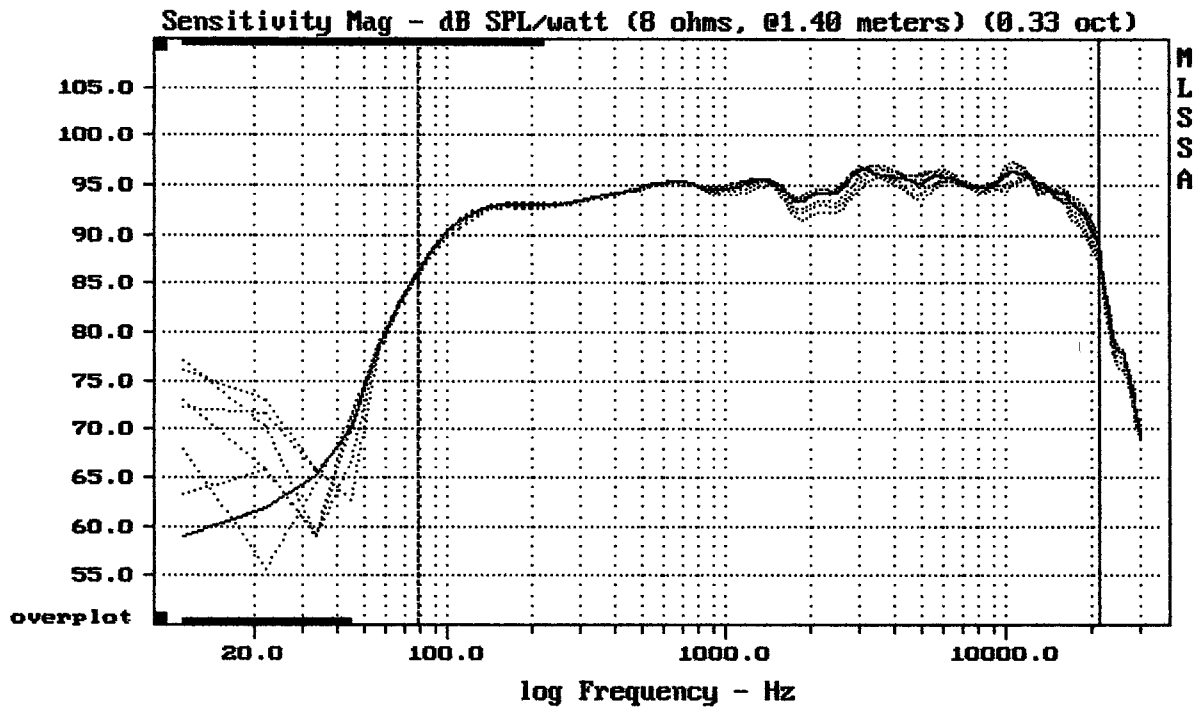


---

mean: 94.77, rms: 94.91, std: 1.45, max: 97.17, min: 86.22

---

EAW JF10

MLSSA: Frequency Domain

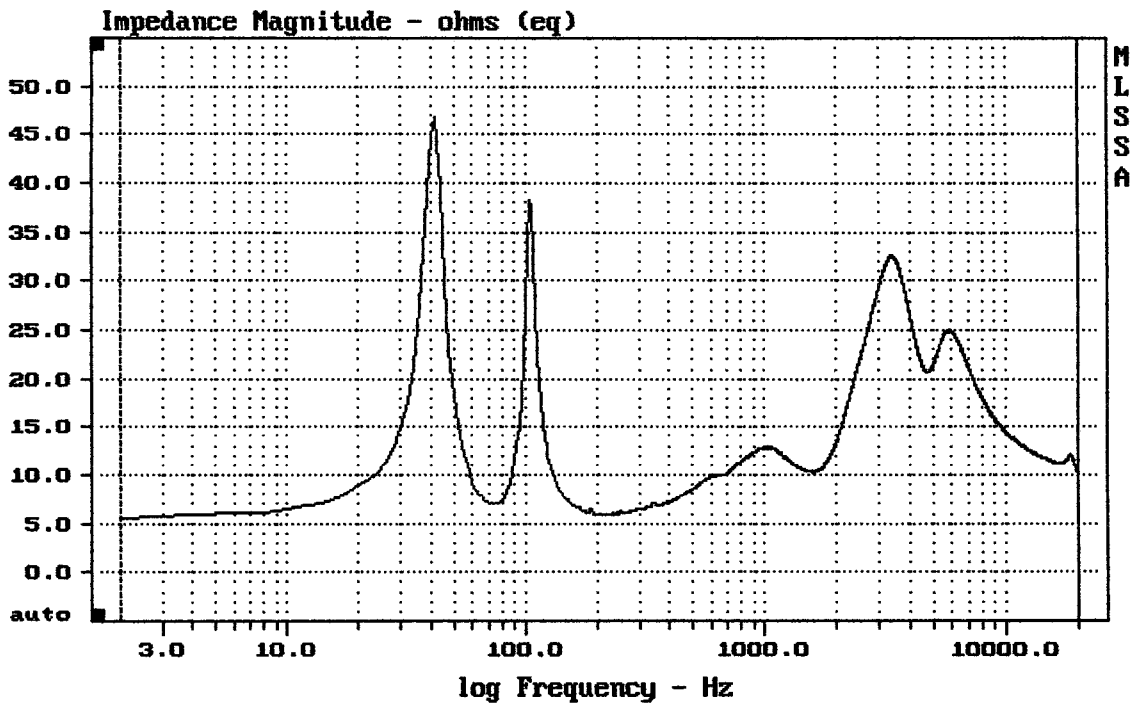


---

mean: 15.76, rms: 16.83, std: 5.911, max: 46.8, min: 5.467

---


EAW JF10

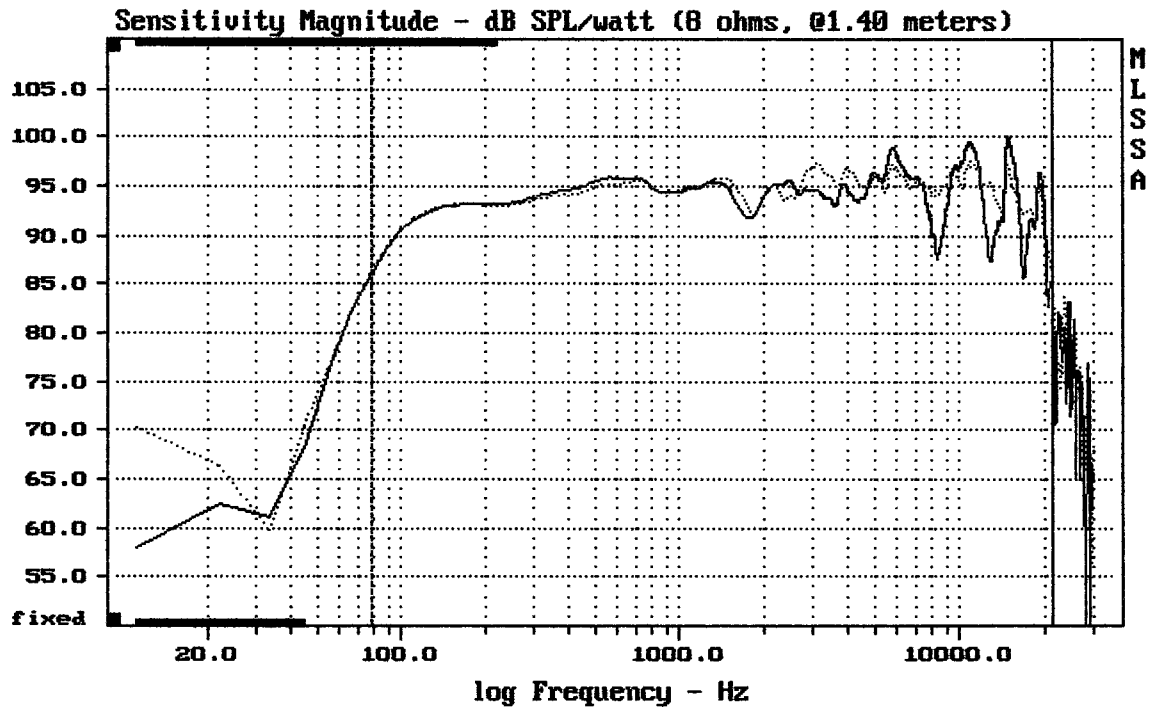


Overlay Compare: dev= +4.1/-7.1, std= 2.5, avg= -0.74

EAW JF10

MLSSA: Frequency Domain

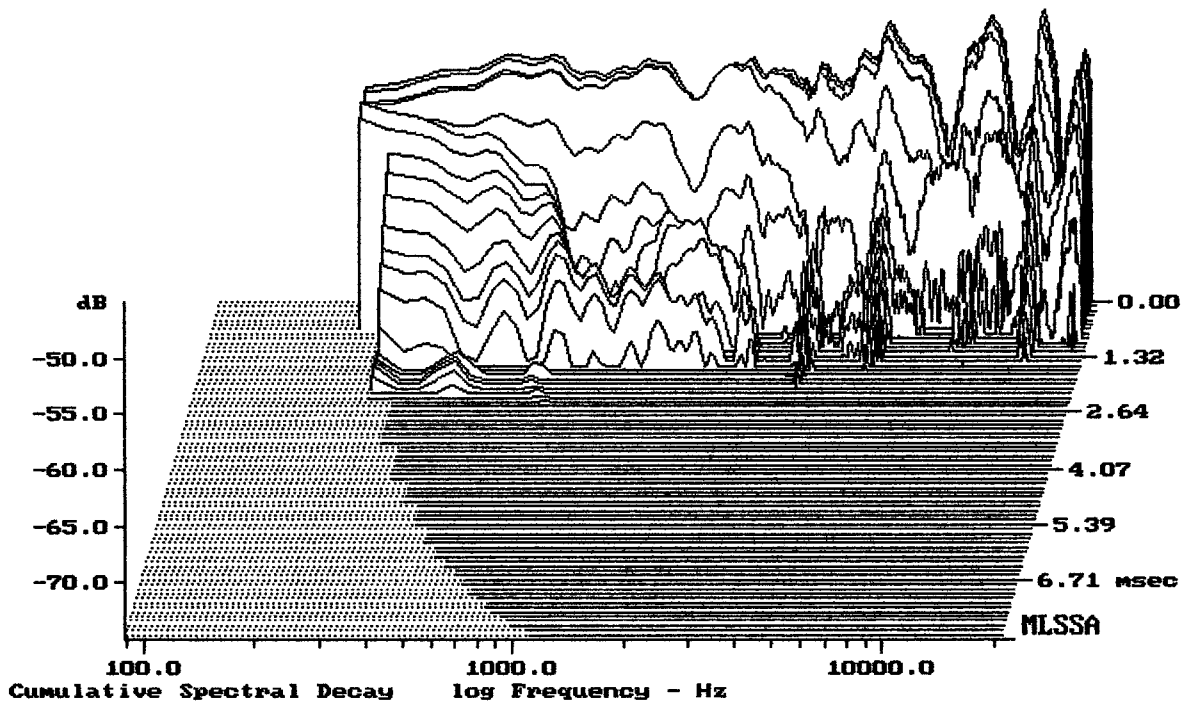

-74.22 dB, 3729 Hz (84), 1.980 msec (19)

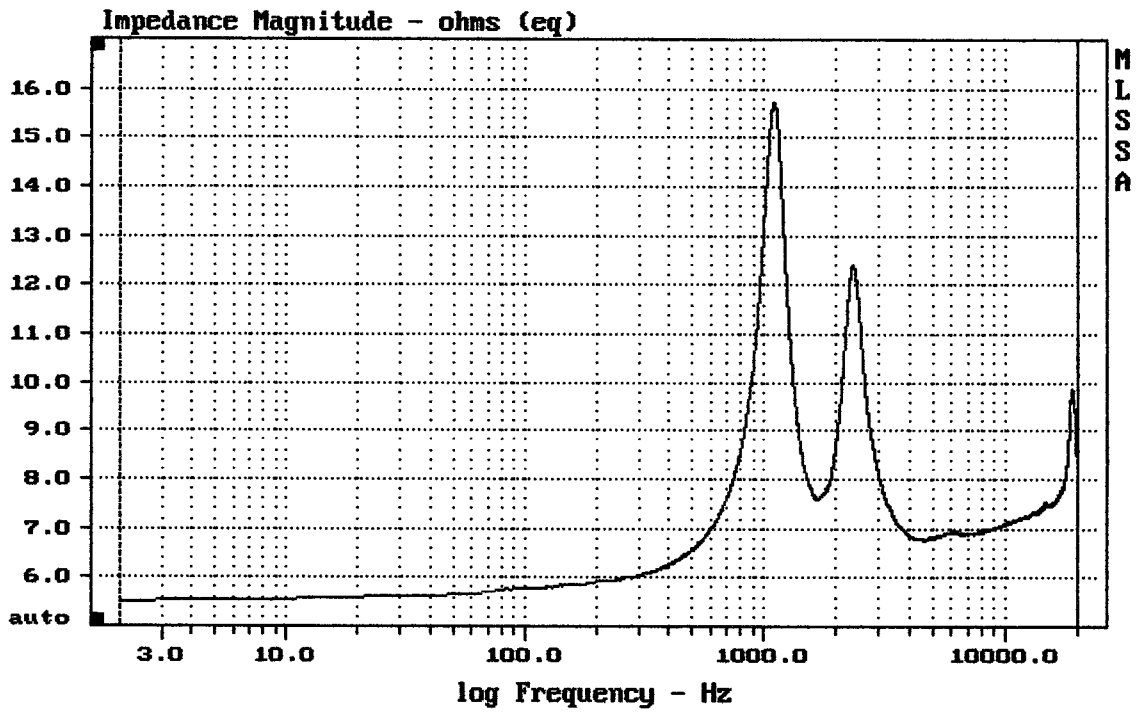


---

mean: 7.691, rms: 7.801, std: 1.304, max: 15.72, min: 5.518

---

P/N 0010029 DN10/1702-B FROM JF10

MLSSA: Frequency Domain

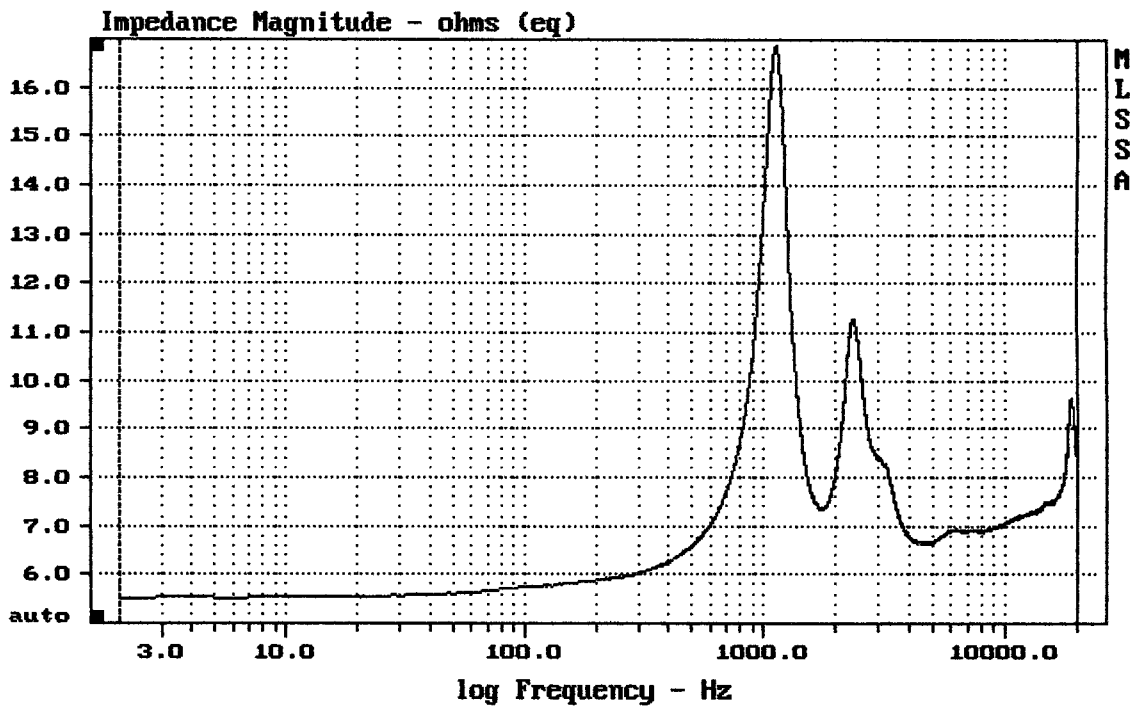


---

mean: 7.663, rms: 7.779, std: 1.337, max: 16.88, min: 5.525

---

DTTO DRIVER



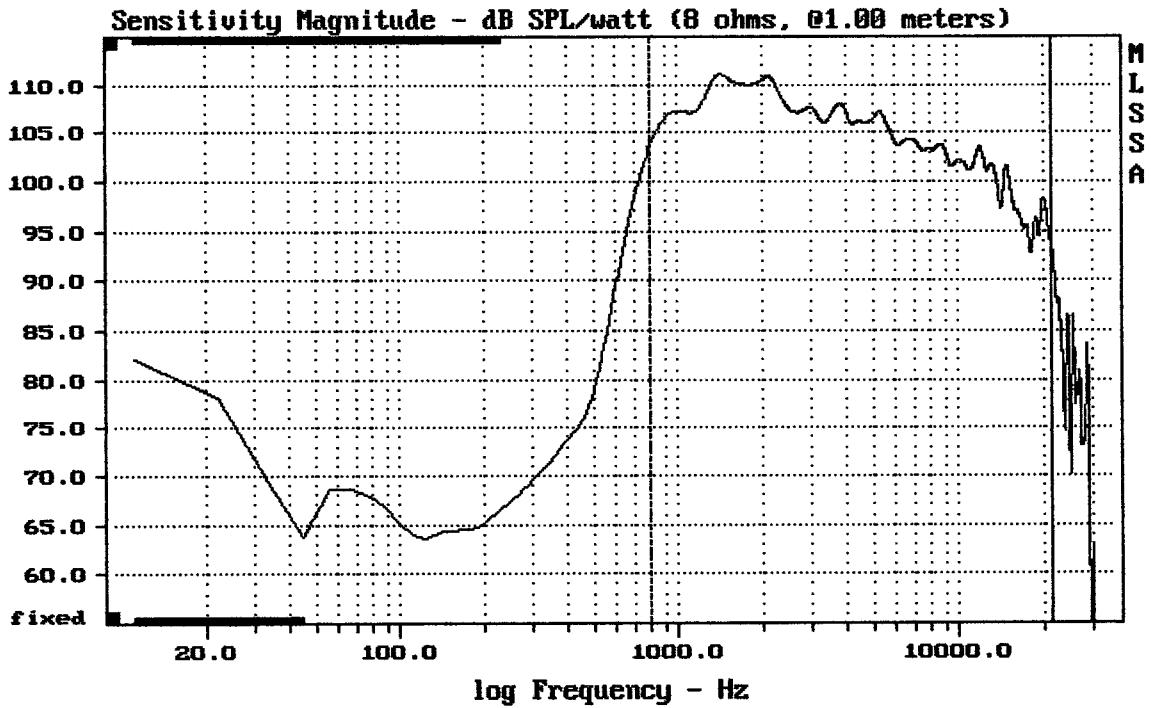


---

Level (799:21507 Hz) = 106.68 dB SPL/watt (8 ohms, @1.00 meters)


---

1" FROM JF10 + A7570

MLSSA: Frequency Domain

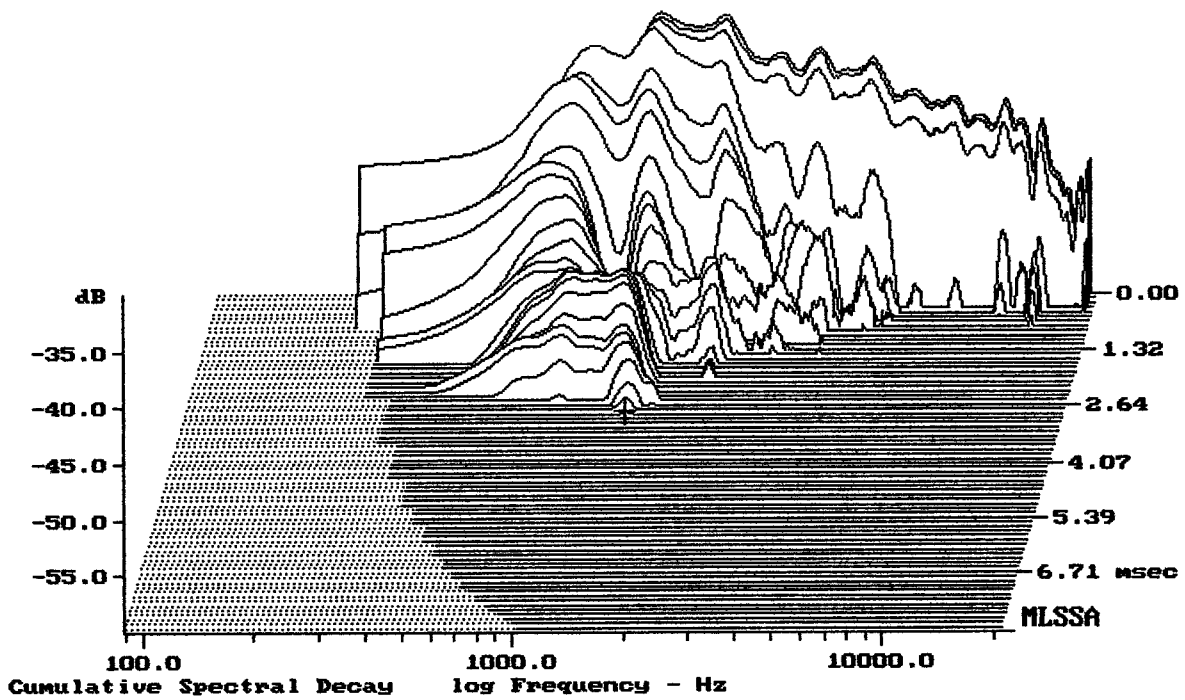

-59.71 dB, 1376 Hz (31), 2.860 msec (27)

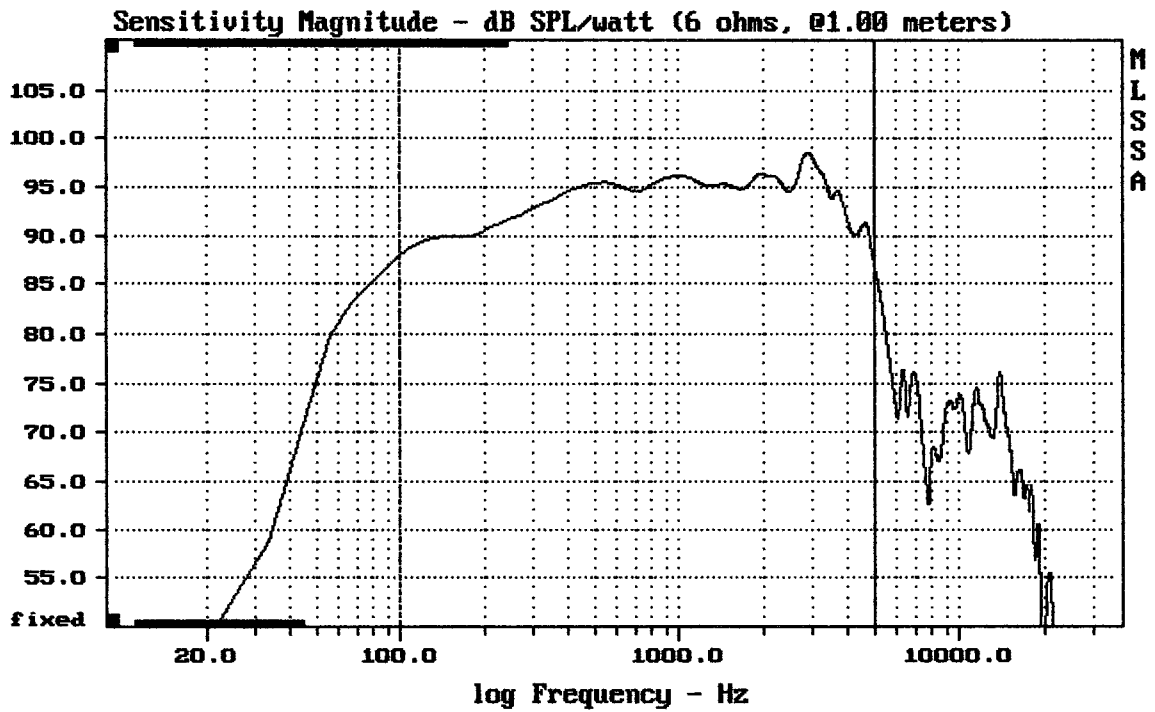


---

Level (100:5005 Hz) = 94.24 dB SPL/watt (6 ohms, @1.00 meters)

---

10" FROM JF10

MLSSA: Frequency Domain

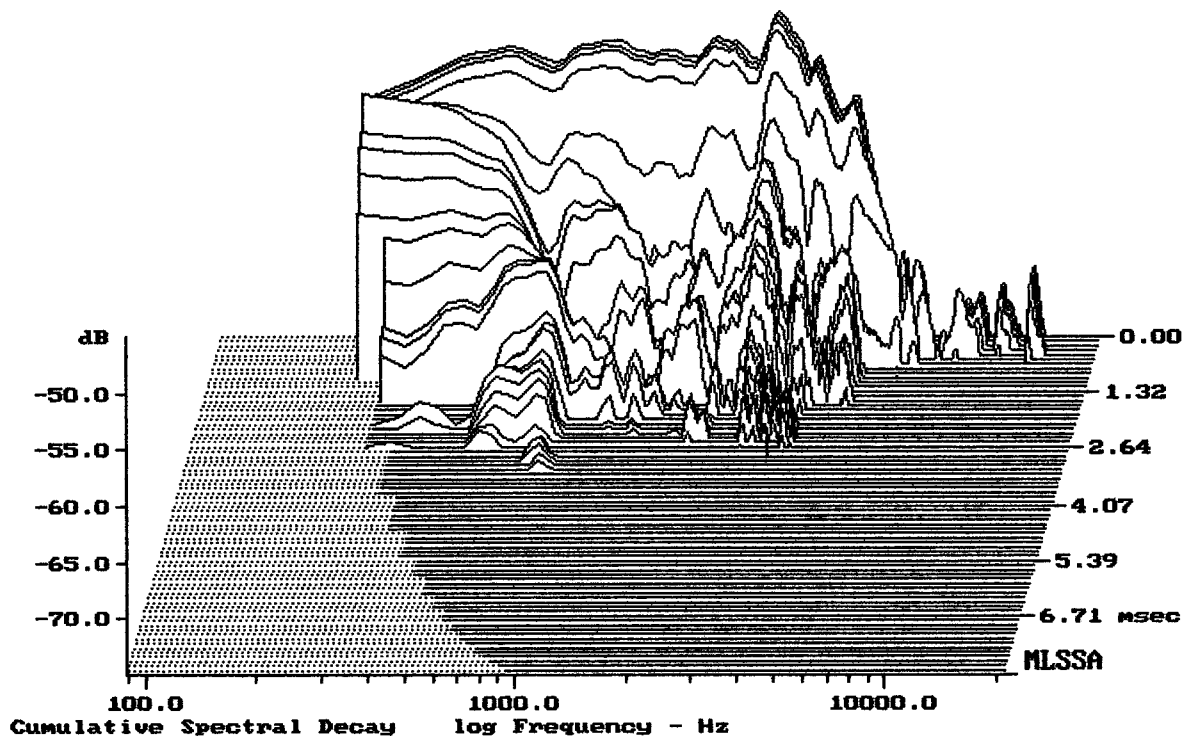

-75.00 dB, 3196 Hz (72), 2.530 msec (24)



MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.38	Ohms
2	Fs	56.67	Hz
3	Re	4.26	Ohms[dc]
4	Res	80.91	Ohms
5	Qms	6.38	
6	Qes	0.34	
7	Qts	0.32	
8	L1	0.43	mH
9	L2	0.54	mH
10	R2	2.09	Ohms
11	RMSE-load	0.22	Ohms
12	Vas(Sd)	33.80	liters
13	Mms	39.32	grams
14	Cms	201	$\mu$ M/Newton
15	B1	13.33	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.7% (-20% to -50% is recommended).

P/N 2035097 LN10/2502-6 FROM JF10

MLSSA: Parameters

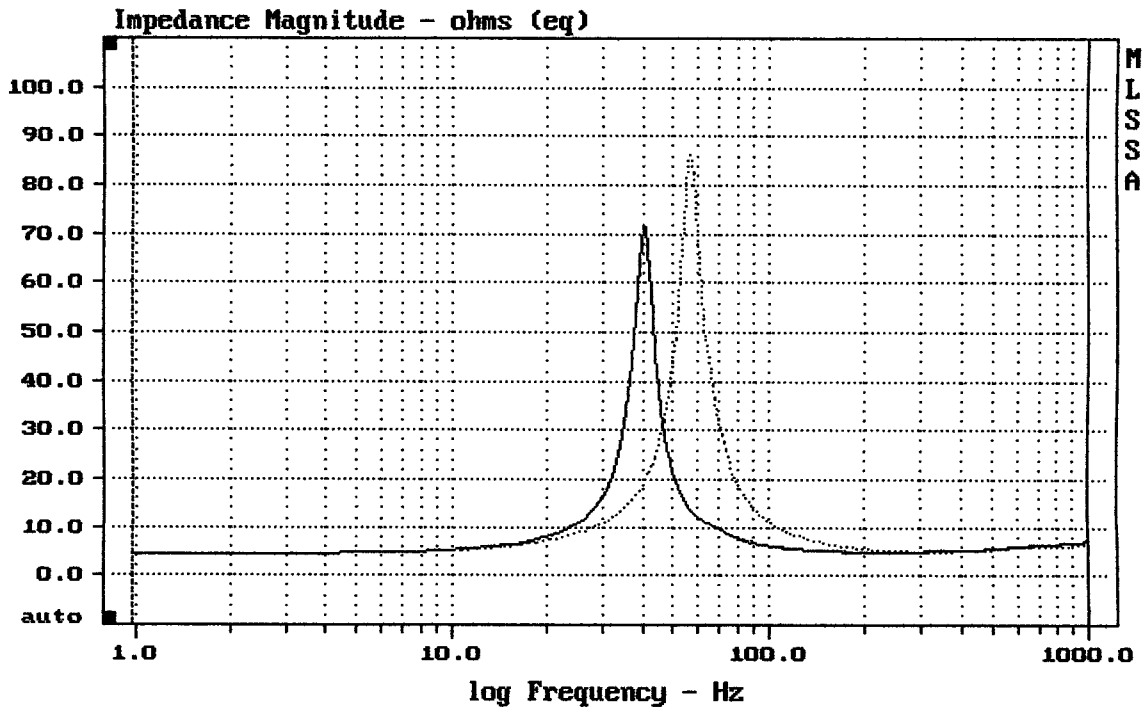

mean: 7.559, rms: 11.27, std: 8.354, max: 86.37, min: 4.321

MLSSA: Frequency Domain