



Level (78:20008 Hz) = 91.46 dB SPL/watt (8 ohms, @1.45 meters)

EAW JF8

MLSSA: Frequency Domain

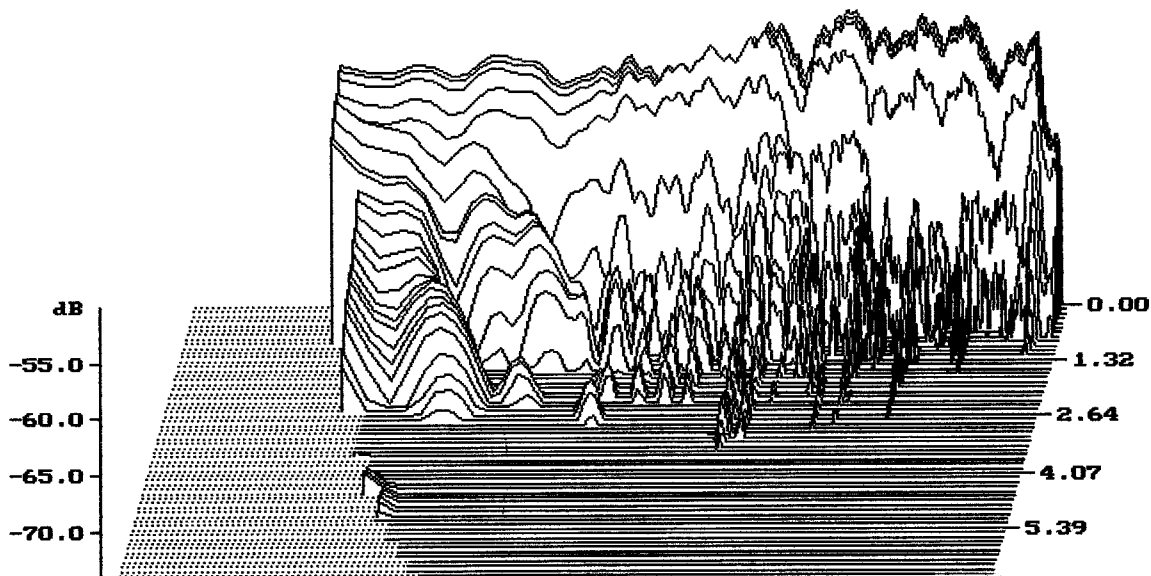


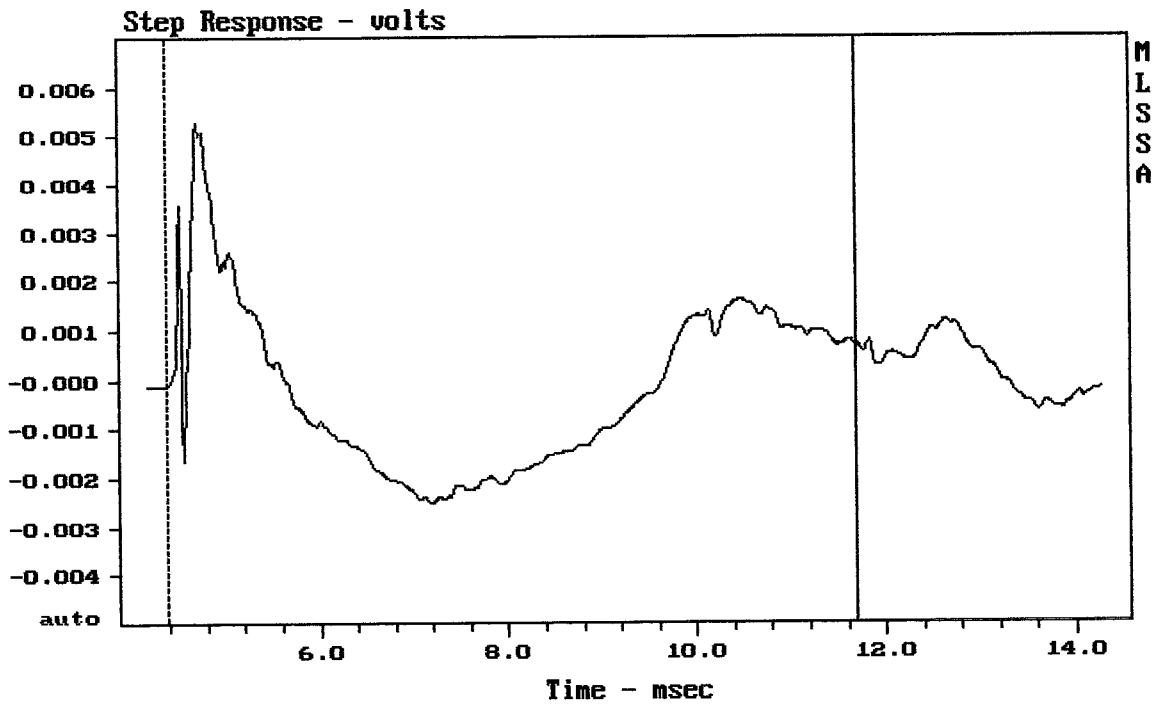

mean: -0.0002007, rms: 0.001676, std: 0.001664, max: 0.005292, min: -0.002495


EAW JF8

MLSSA: Time Domain

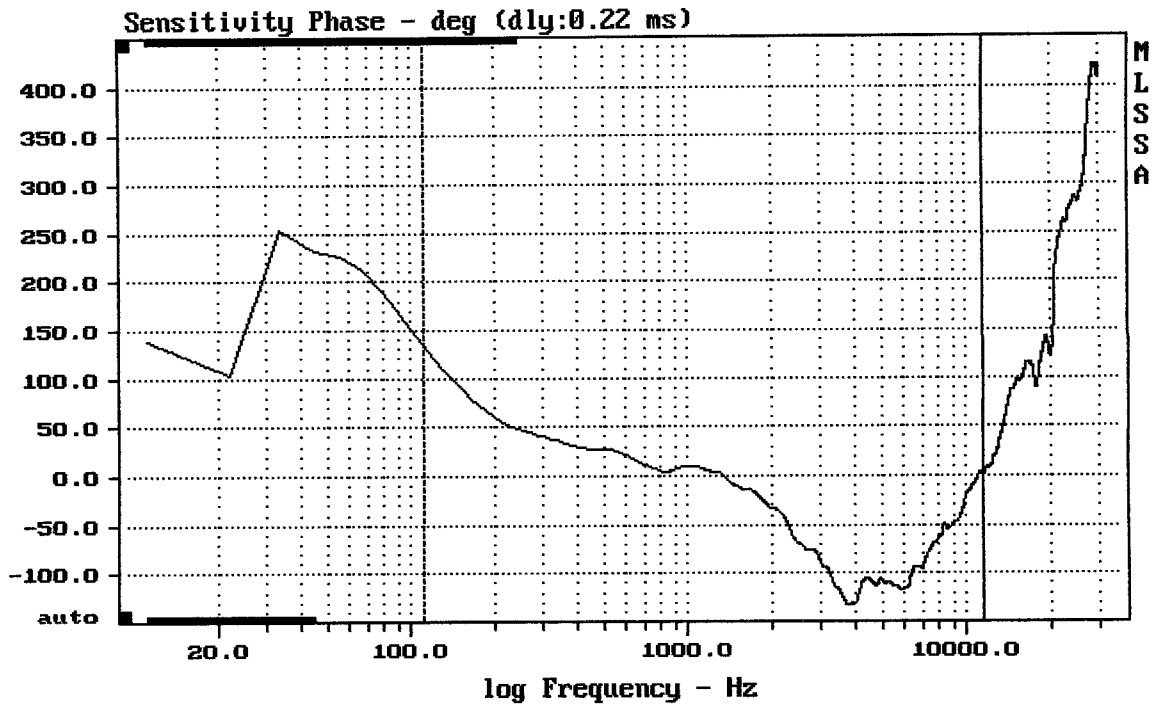

mean: -58.18, rms: 75.6, std: 48.28, max: 134.8, min: -133.3


EAW JF8

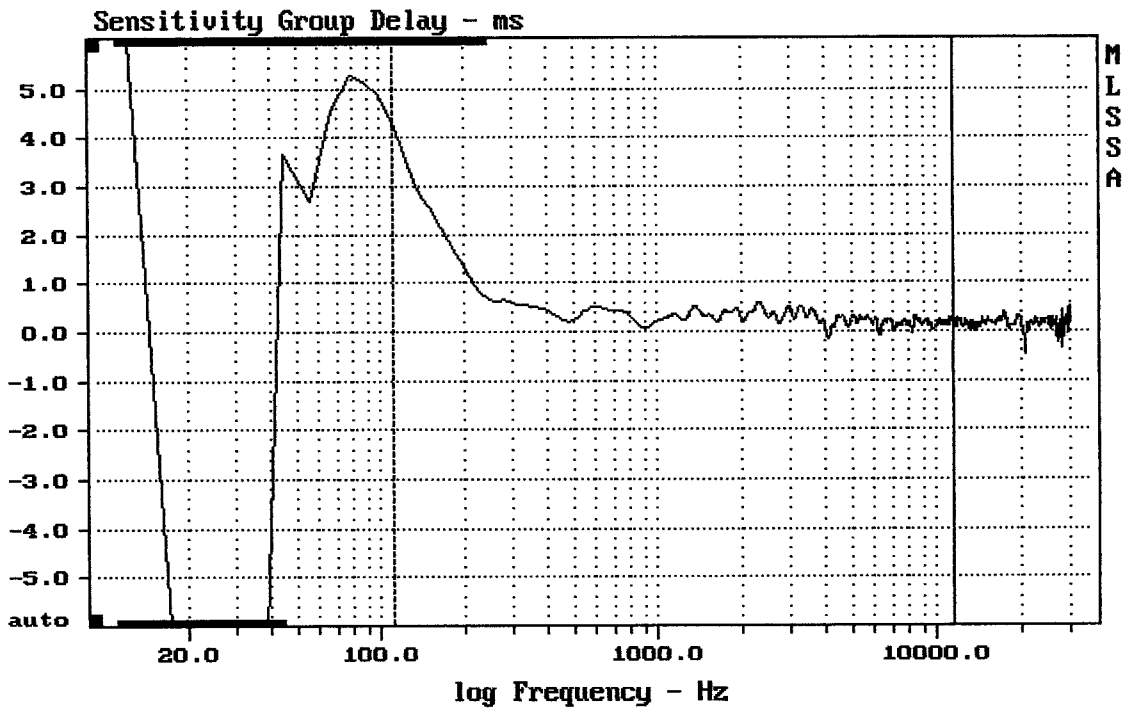

mean: 0.2508, rms: 0.3706, std: 0.2728, max: 4.311, min: -0.1435


EAW JF8

MLSSA: Frequency Domain

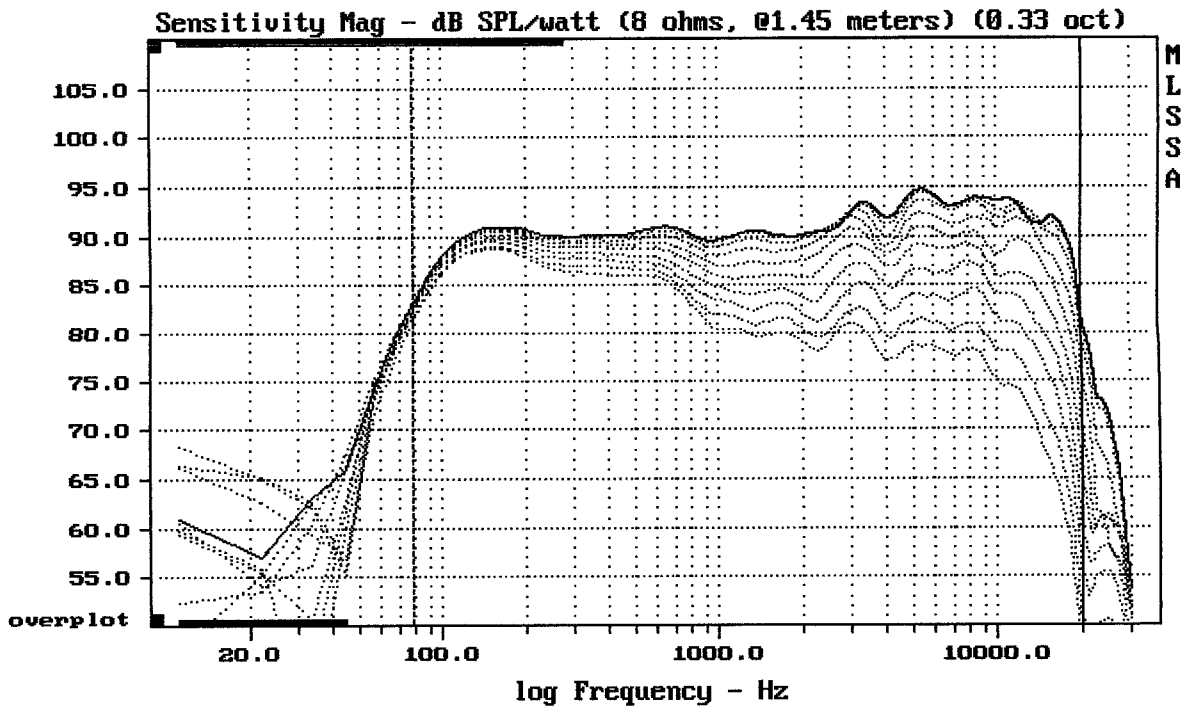

Overlay Compare: dev= +18/-17, std= 7.4, avg= -19


EAW JF8

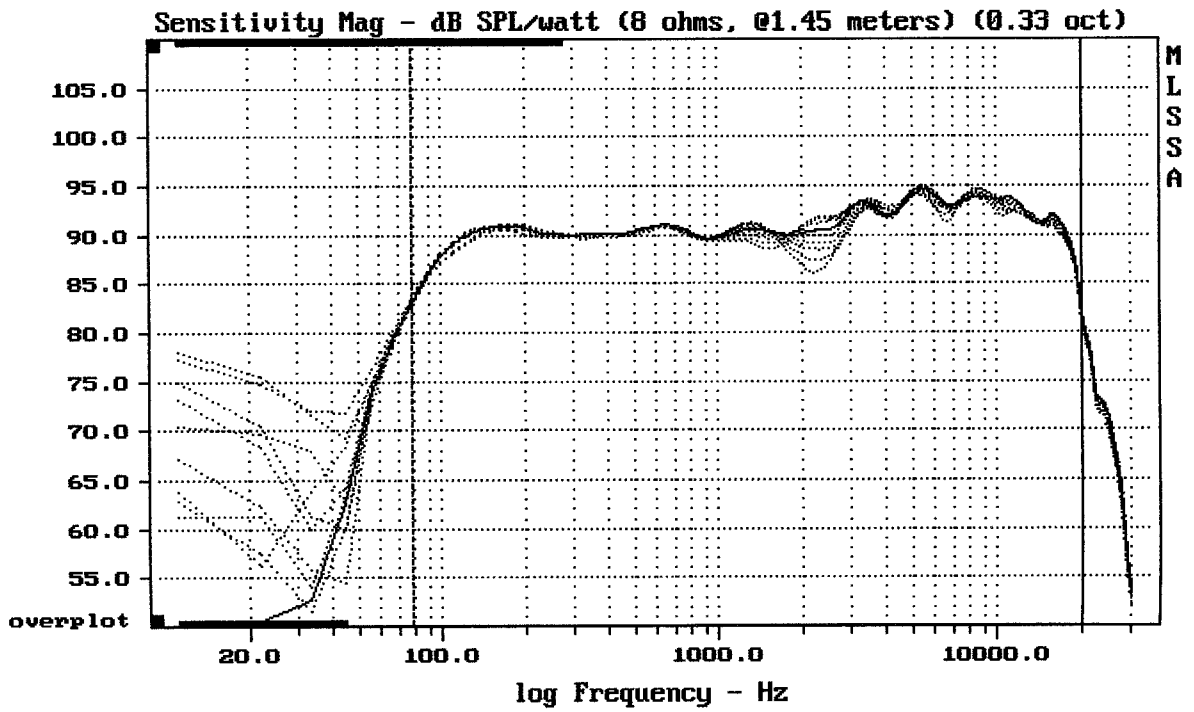

mean: 92.06, rms: 92.26, std: 1.70, max: 94.94, min: 82.62


EAW JF8

MLSSA: Frequency Domain

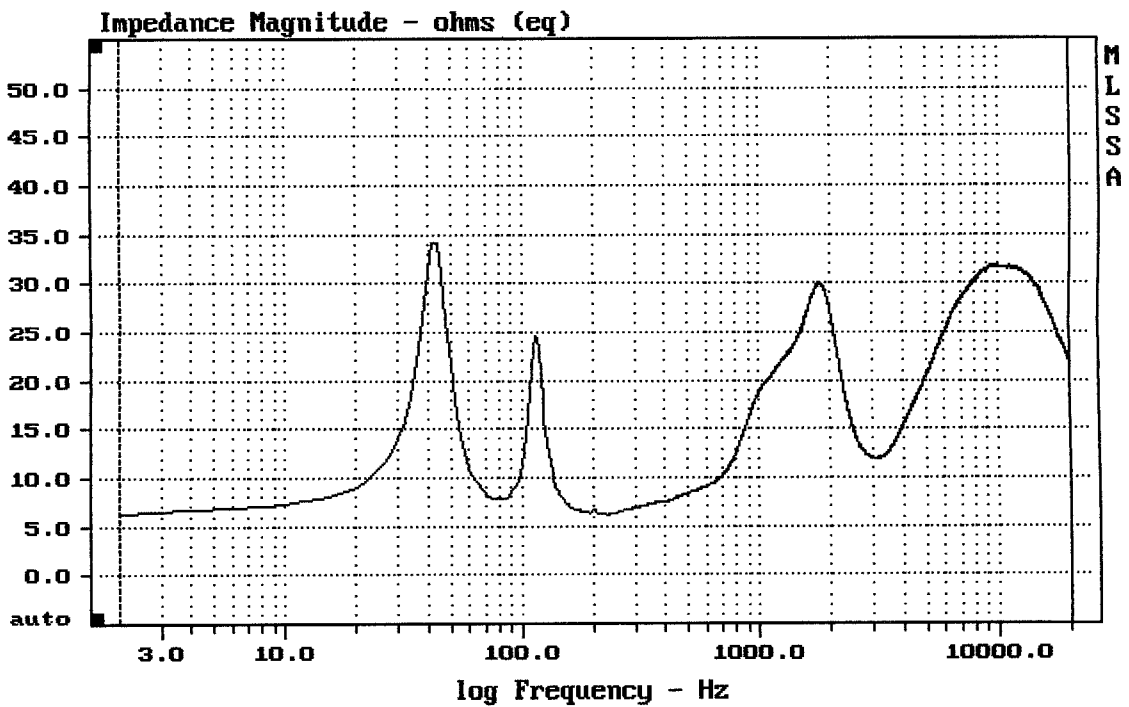

mean: 25.37, rms: 26.19, std: 6.483, max: 34.23, min: 6.16


EAW JF8

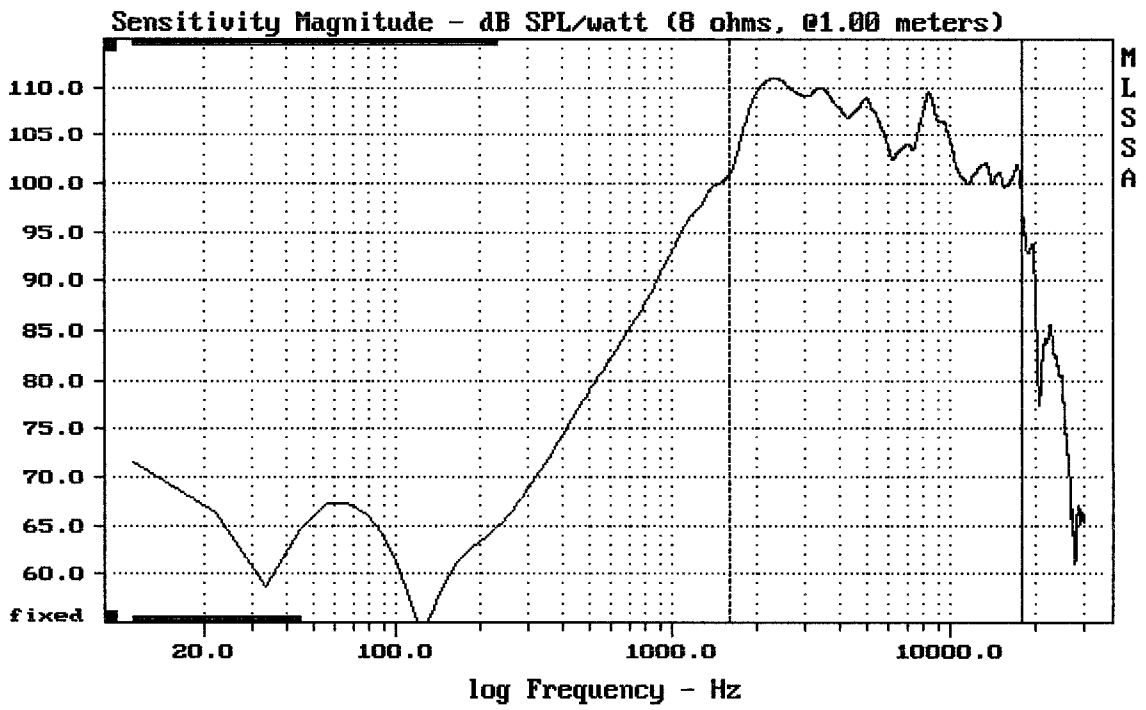


Level (1598:18000 Hz) = 107.13 dB SPL/watt (8 ohms, @1.00 meters)

1" + HORN FROM EAW JF8

MLSSA: Frequency Domain

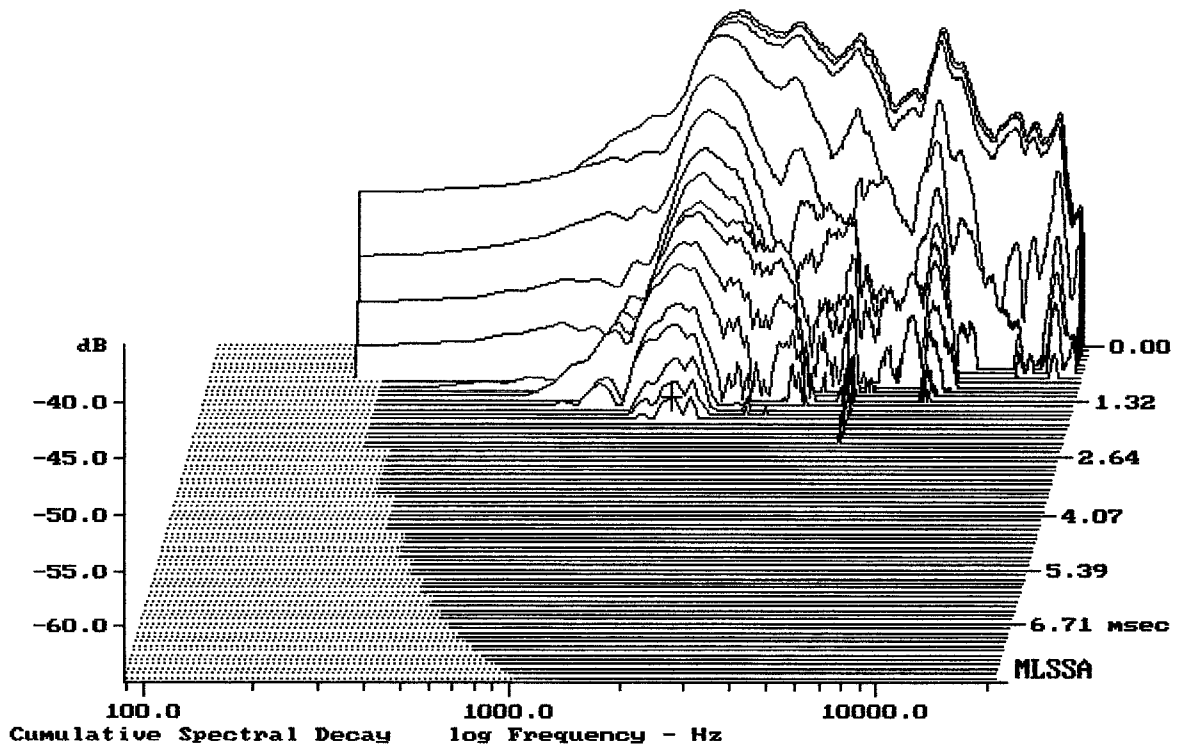


-63.12 dB, 1731 Hz (39), 1.760 msec (17)

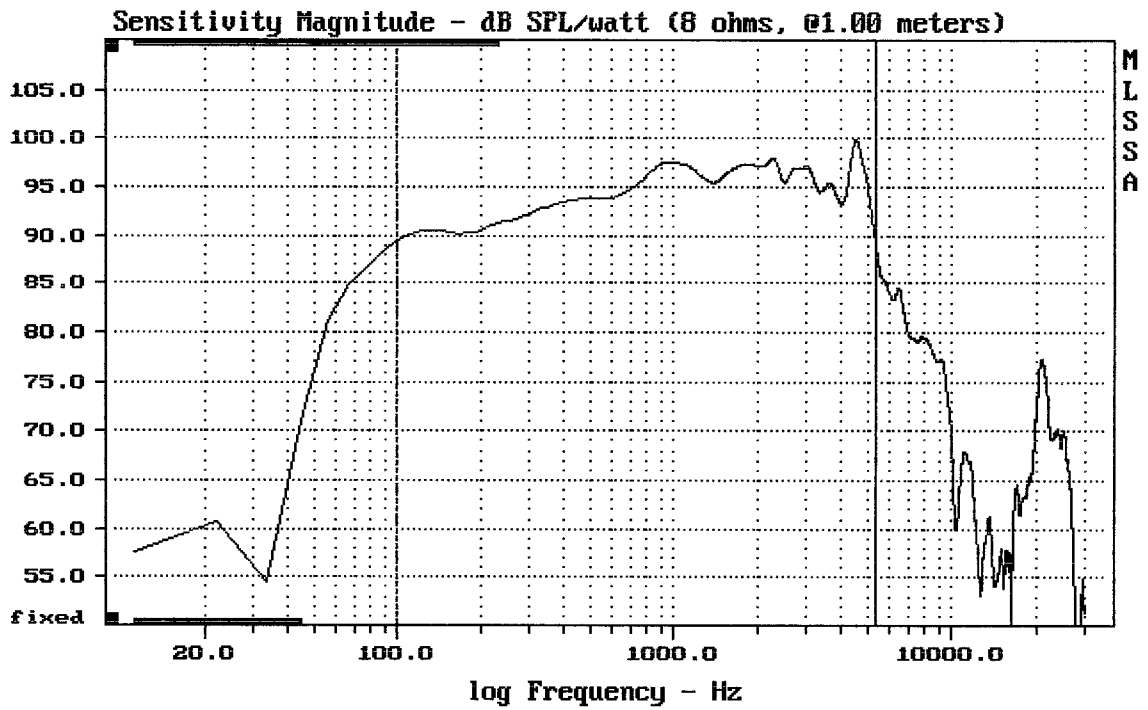

Level (100:5305 Hz) = 94.92 dB SPL/watt (8 ohms, @1.00 meters)

8" FROM EAW JF8 8NMB420B

MLSSA: Frequency Domain

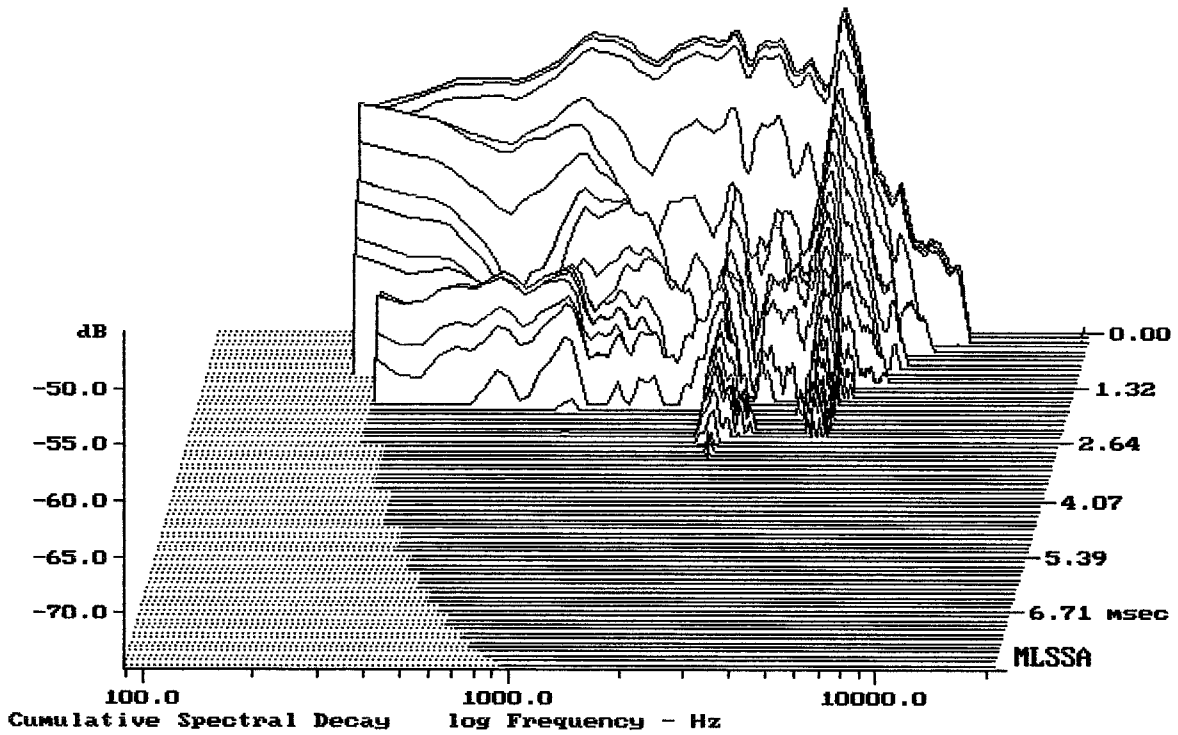

-74.41 dB, 2353 Hz (53), 2.860 msec (27)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data			QC Limits
Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	61.35	Hz
3	Re	5.13	Ohms[dc]
4	Res	47.89	Ohms
5	Qms	4.23	
6	Qes	0.45	
7	Qts	0.41	
8	L1	0.38	mH
9	L2	0.60	mH
10	R2	1.51	Ohms
11	RMSE-load	0.17	Ohms
12	Vas(Sd)	22.71	liters
13	Mms	19.03	grams
14	Cms	354	$\mu\text{M}/\text{Newton}$
15	B1	9.11	Tesla-M
16	SPLref(Sd)	92.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.4% (-20% to -50% is recommended).

8NMB420B

MLSSA: Parameters

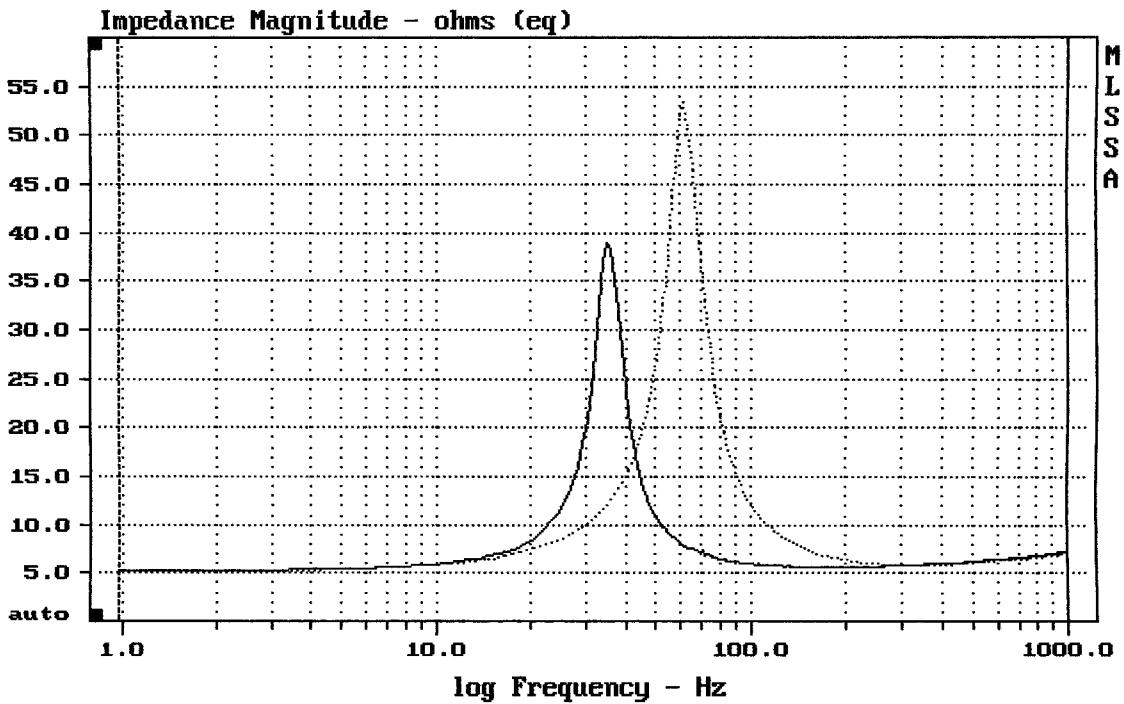

mean: 7.824, rms: 9.812, std: 5.922, max: 53.41, min: 5.222

MLSSA: Frequency Domain