



Level (55:19498 Hz) = 95.77 dB SPL/watt (8 ohms, @1.65 meters) (0.33 oct)

EAW MW15

MLSSA: Frequency Domain

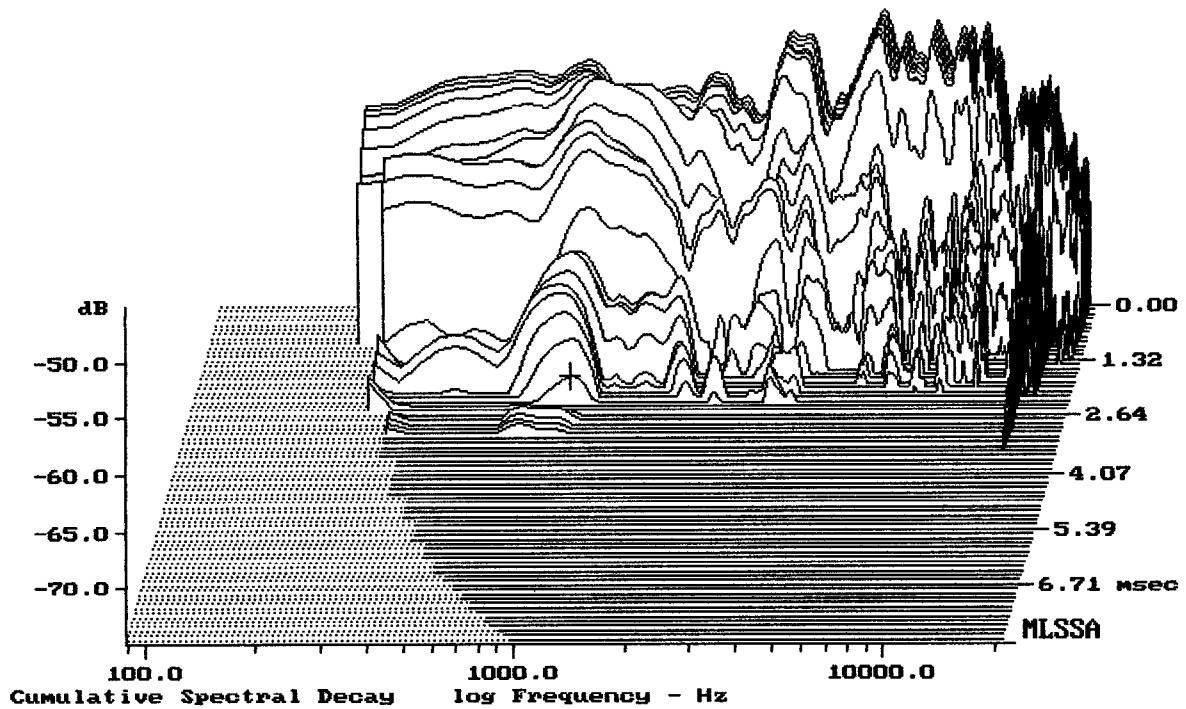

-72.77 dB, 932 Hz (21), 2.310 msec (22)

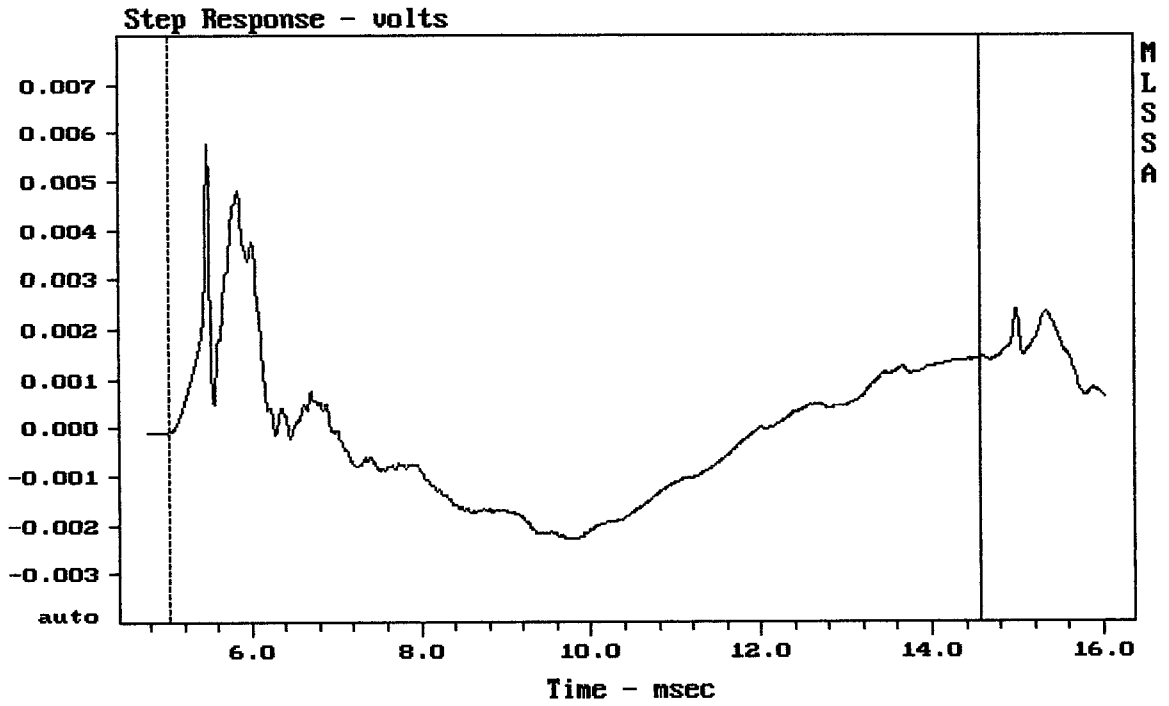


---

mean: -0.0001939, rms: 0.001497, std: 0.001484, max: 0.005764, min: -0.002301

---

EAW MW15

MLSSA: Time Domain

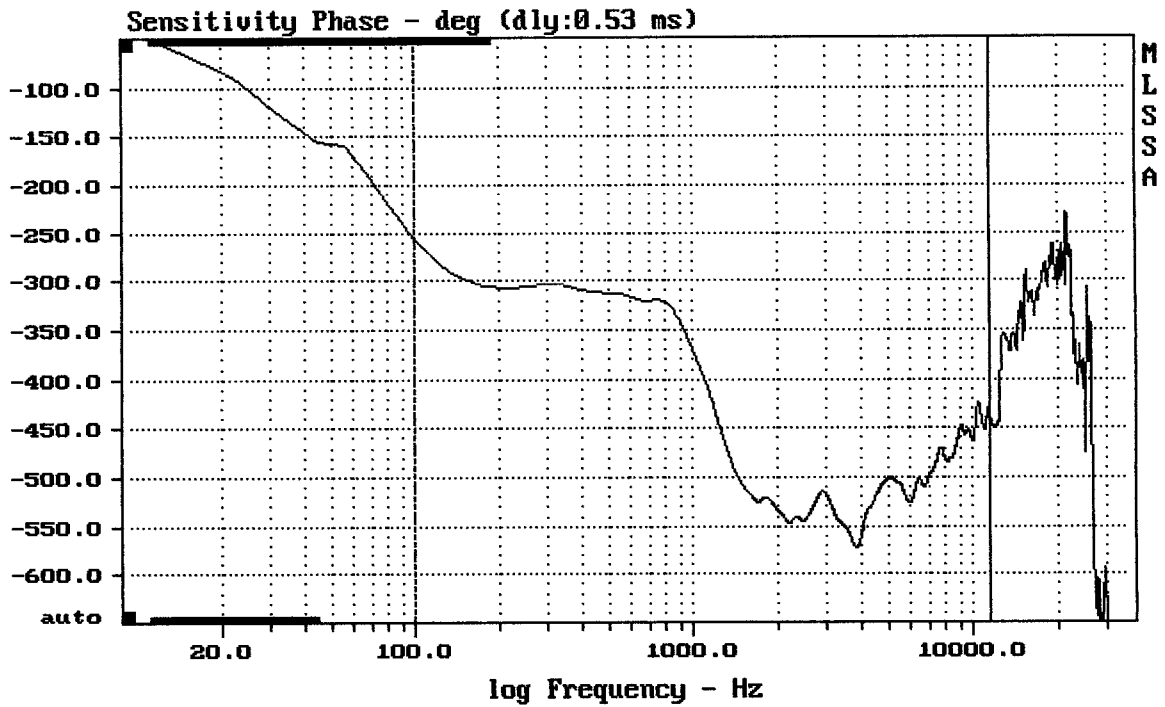


---

mean: -479.6, rms: 483.5, std: 61.15, max: -255.8, min: -572.8

---

EAW MW15

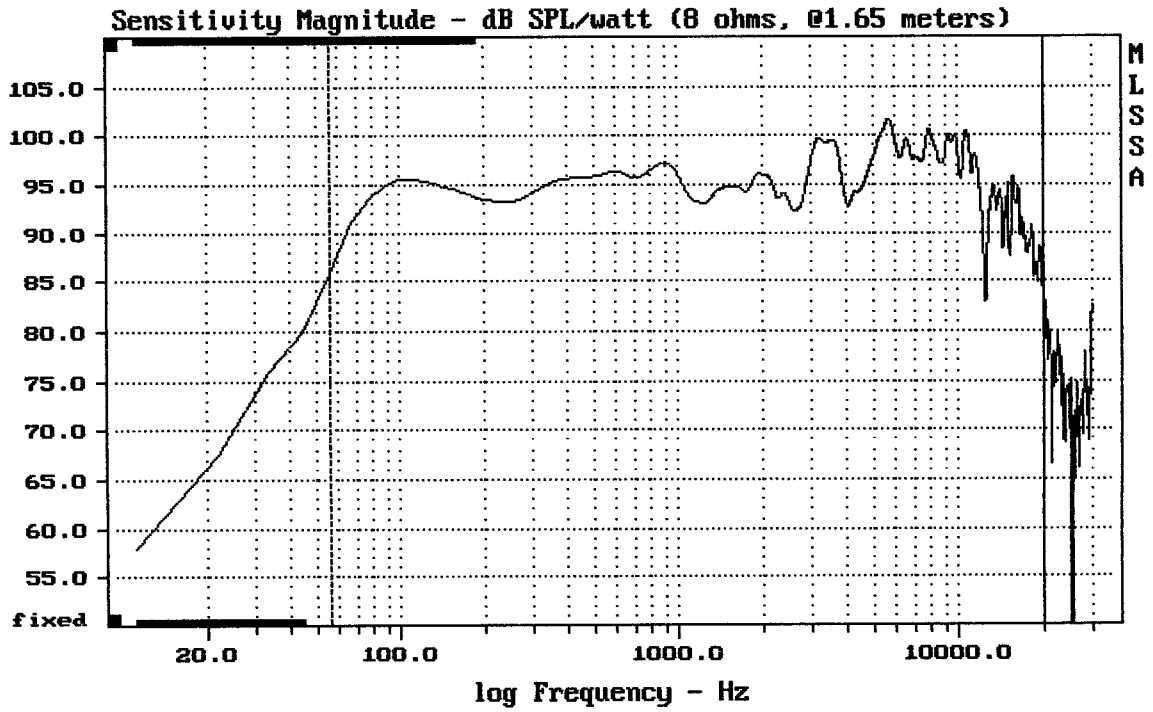


---

mean: 95.51, rms: 96.27, std: 3.15, max: 101.64, min: 82.85

---

EAW MW15

MLSSA: Frequency Domain

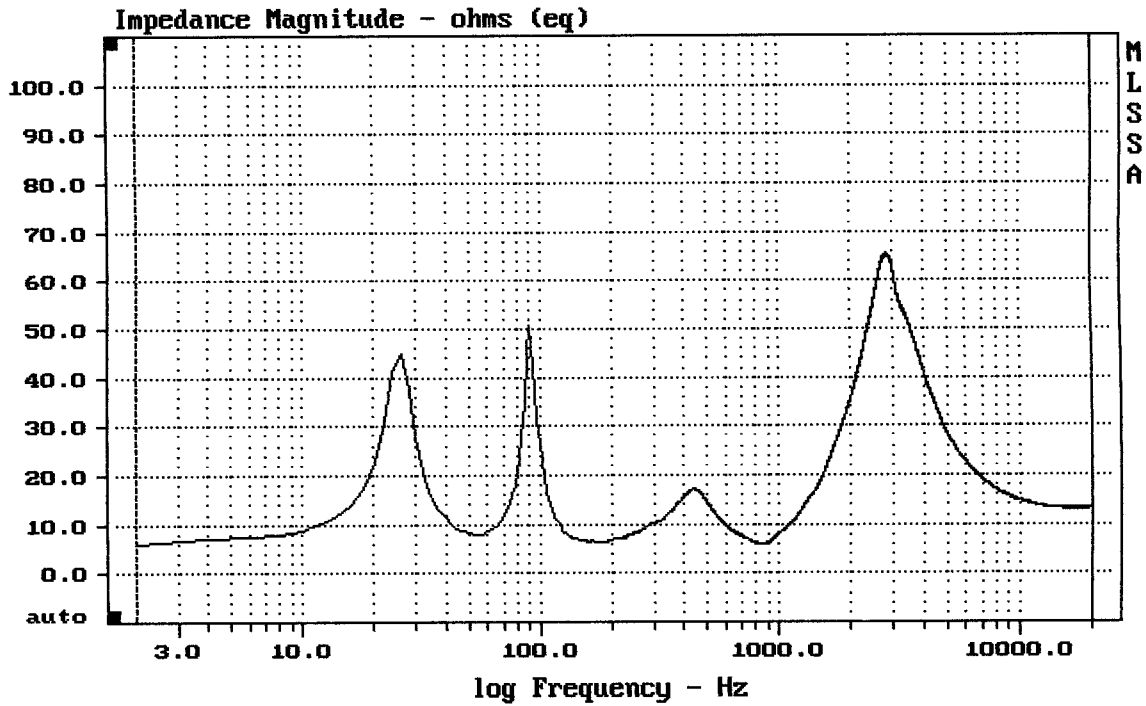


---

mean: 20.04, rms: 23.63, std: 12.52, max: 65.4, min: 6.021

---


EAW MW15

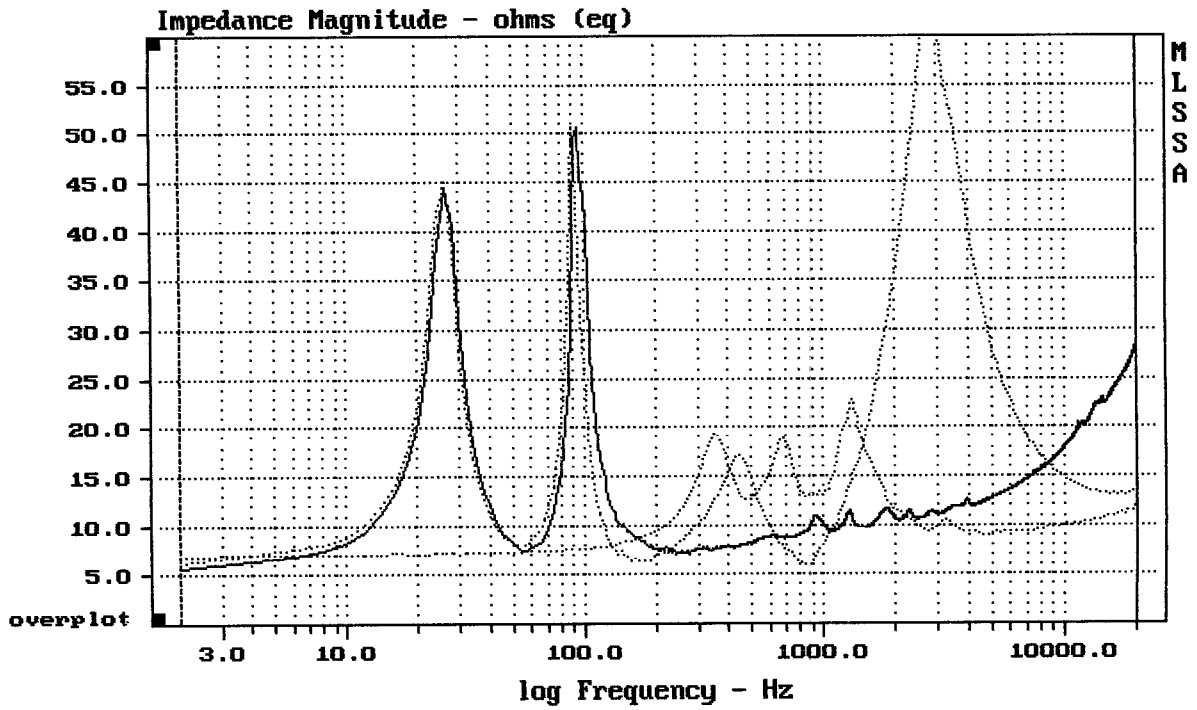

CURSOR: y = 11.8756 x = 20001.5203 (9995)


EAW MW15

MLSSA: Frequency Domain

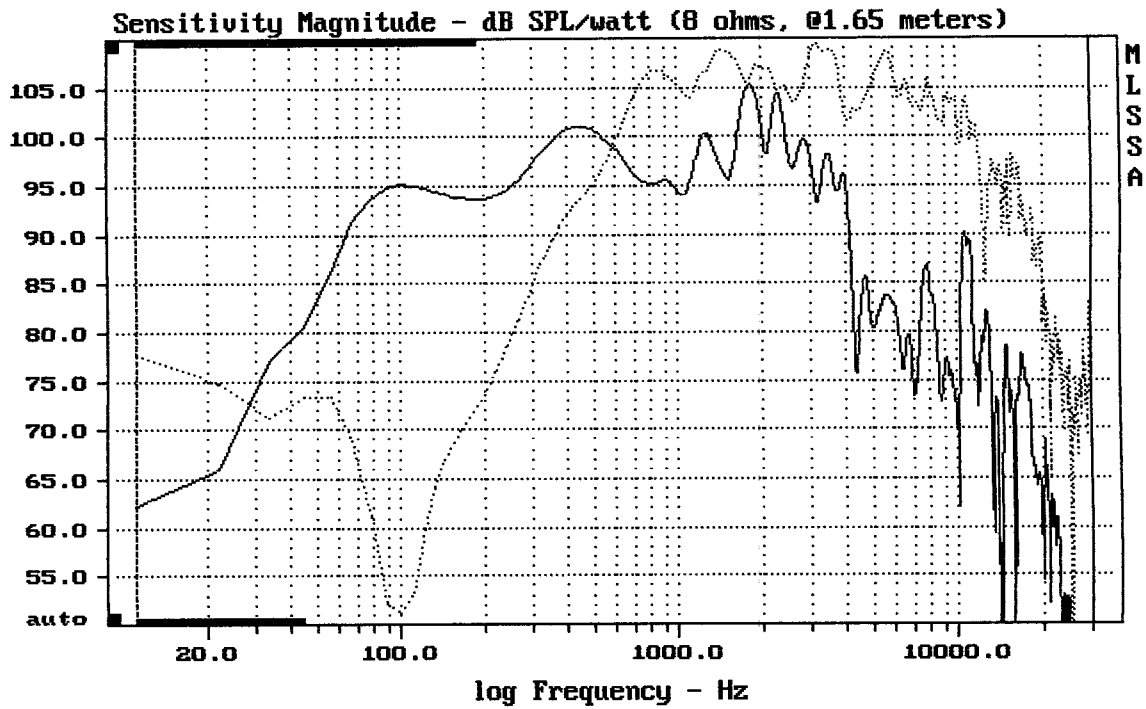


CURSOR: dy = 38.8279 x = 30007.1014 (2704)

EAW MW15

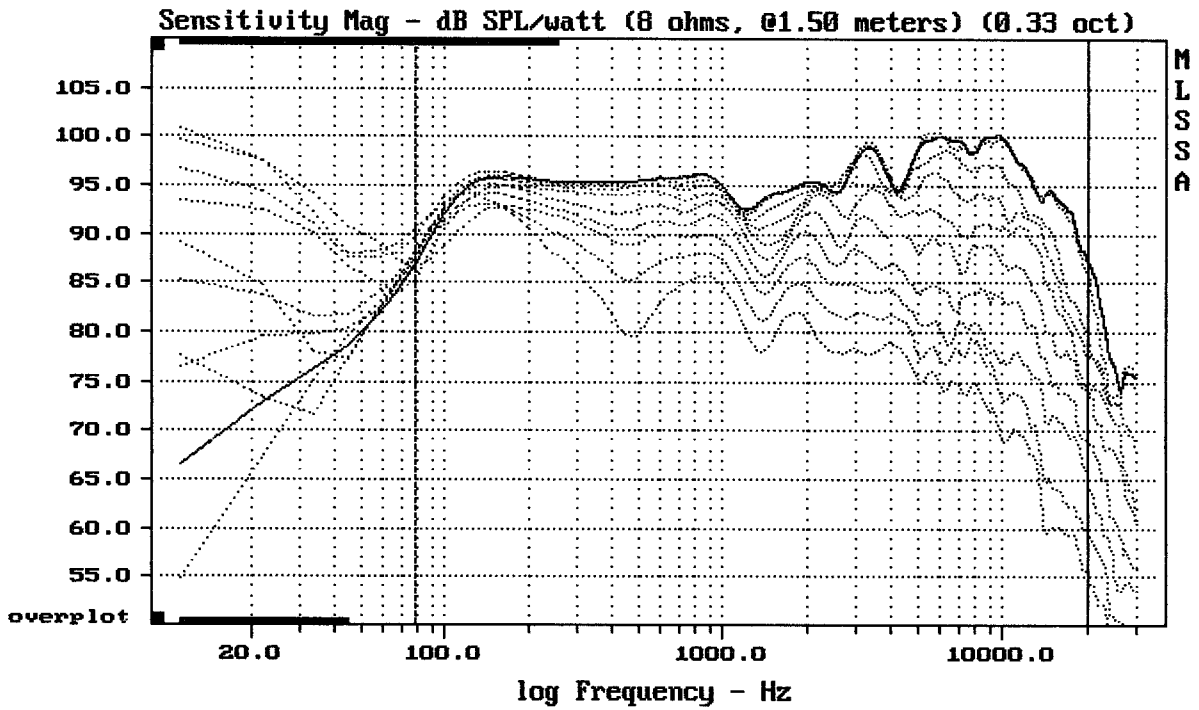


Overlay Compare: dev= +30/-8.7, std= 7, avg= -26

MLSSA: Frequency Domain

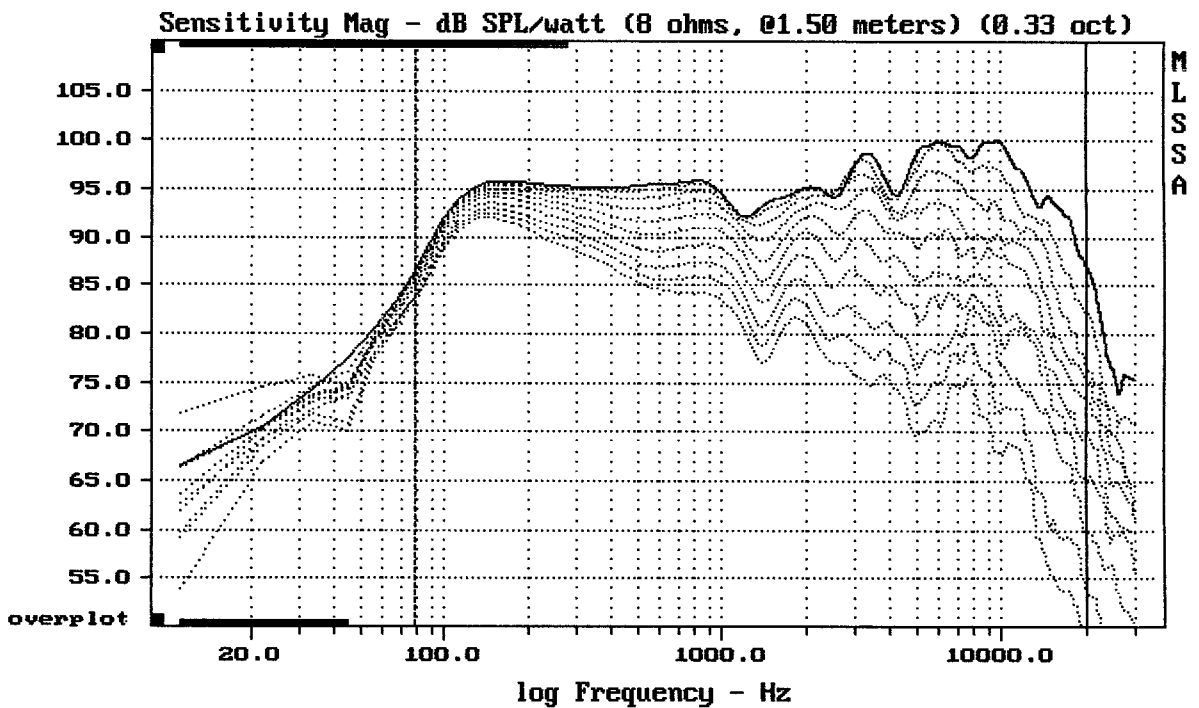

Overlay Compare: dev= +26/-10, std= 8.5, avg= -29


DTTO UP

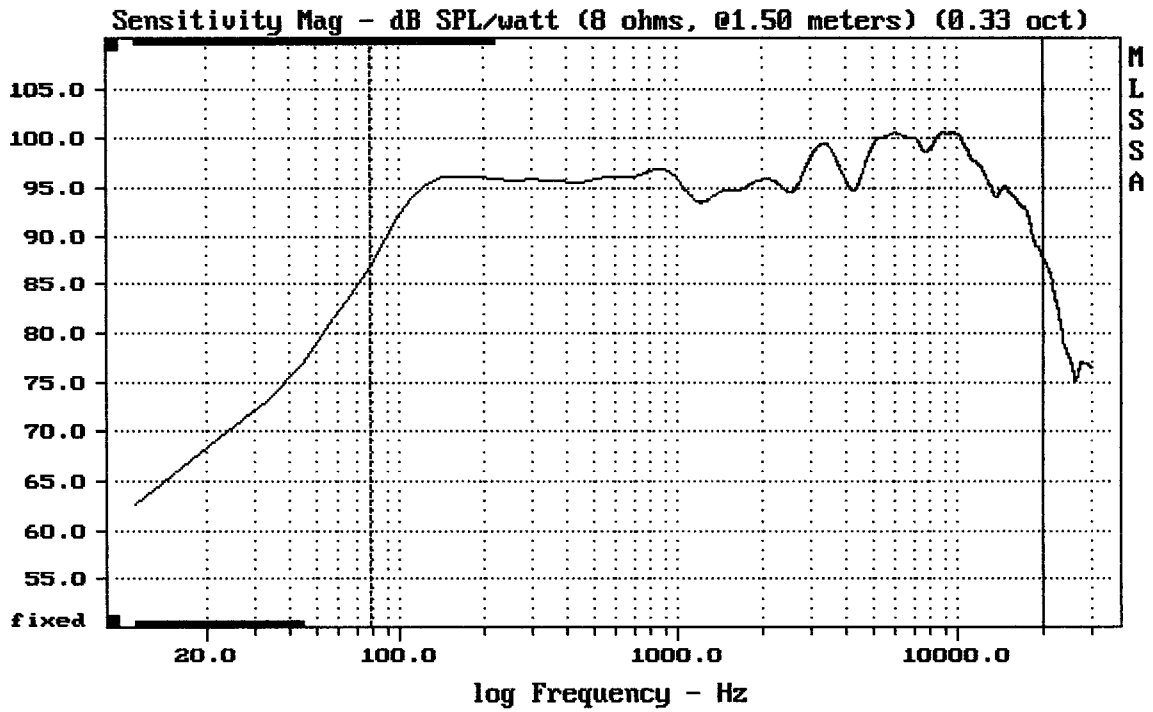


Level (78:19997 Hz) = 96.60 dB SPL/watt (8 ohms, @1.50 meters) (0.33 oct)

EAW MW15

MLSSA: Frequency Domain

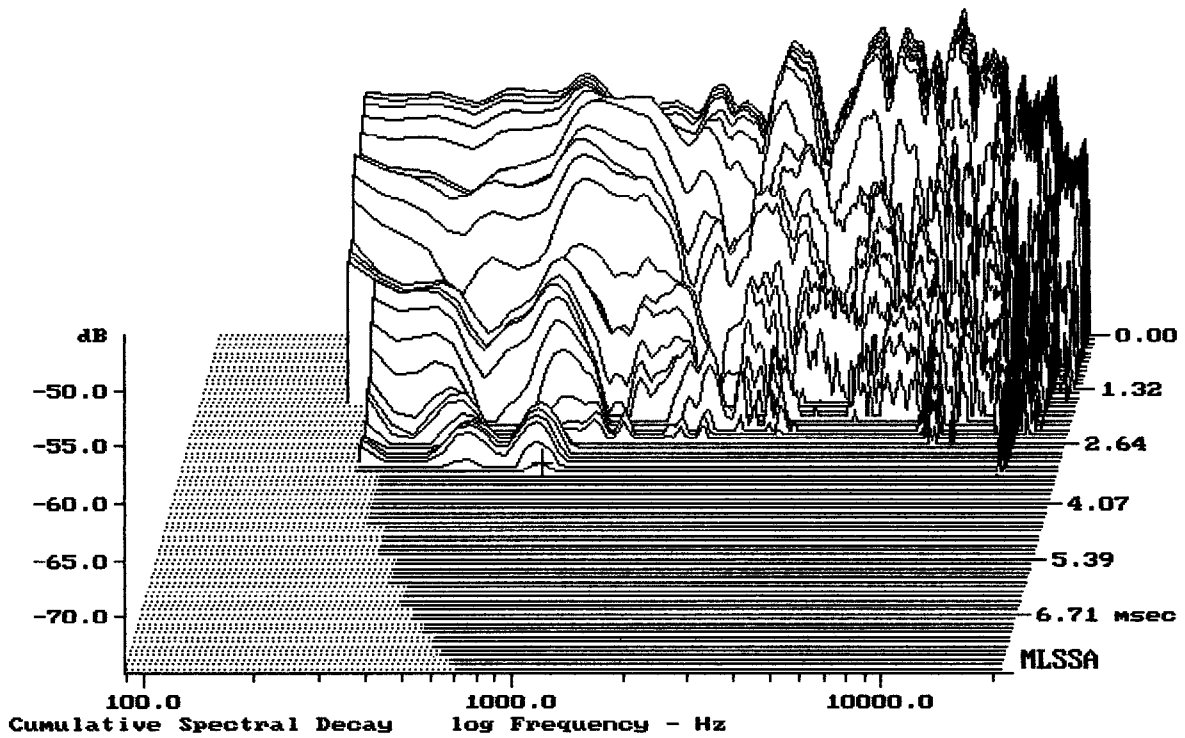

-74.33 dB, 843 Hz (19), 3.300 msec (31)

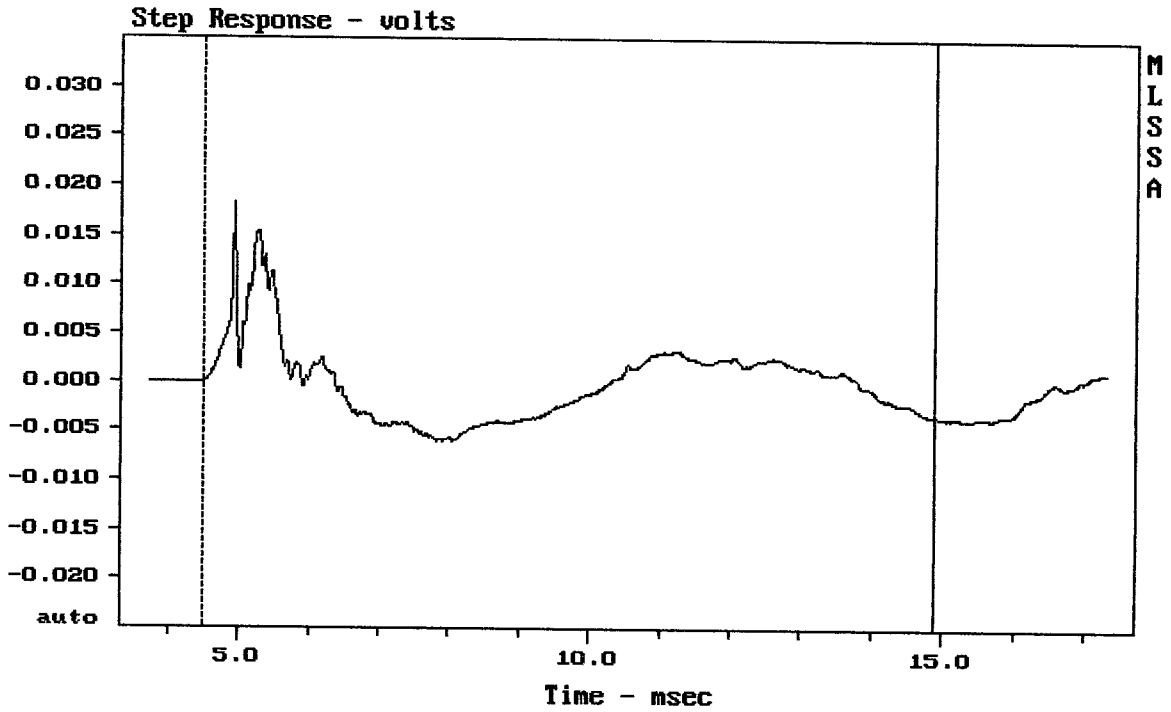


---

mean:  $-6.55e-005$ , rms: 0.003991, std: 0.00399, max: 0.01818, min: -0.006042

---

EAW MW15

MLSSA: Time Domain

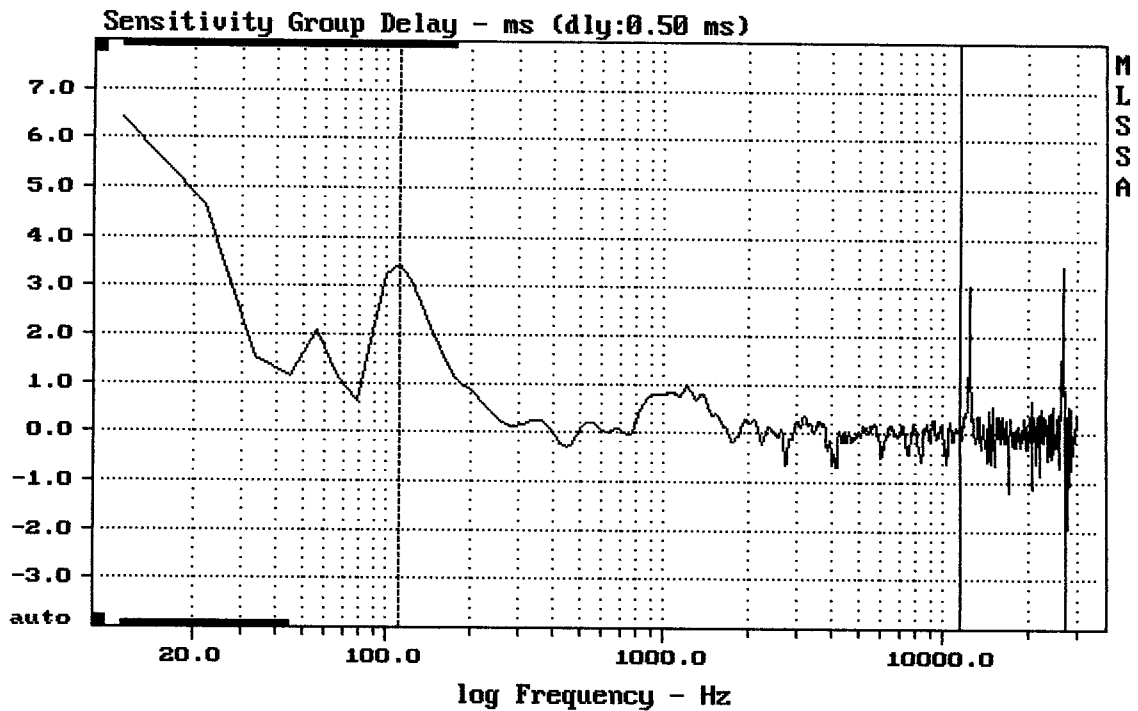


---

mean: 0.05177, rms: 0.3383, std: 0.3343, max: 3.428, min: -0.7007

---


EAW MW15

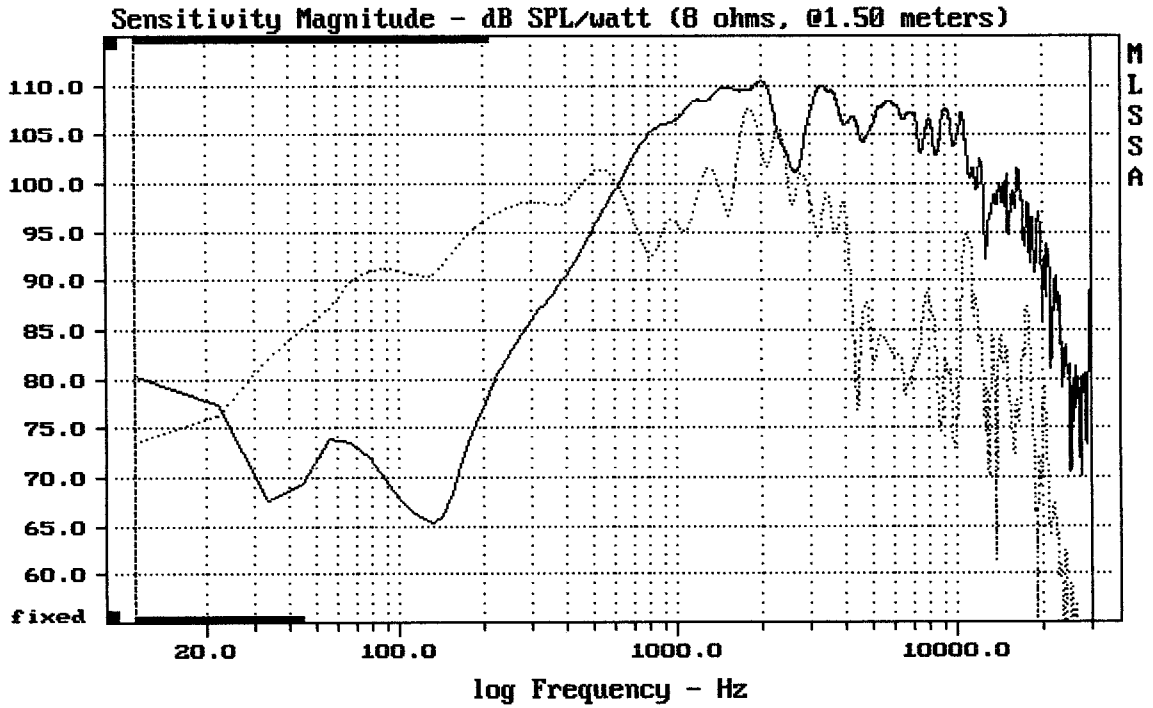

CURSOR:  $dy = -51.3569$   $x = 30007.1014$  (2704)

COAX 15" FROM EAW MW15


MLSSA: Frequency Domain

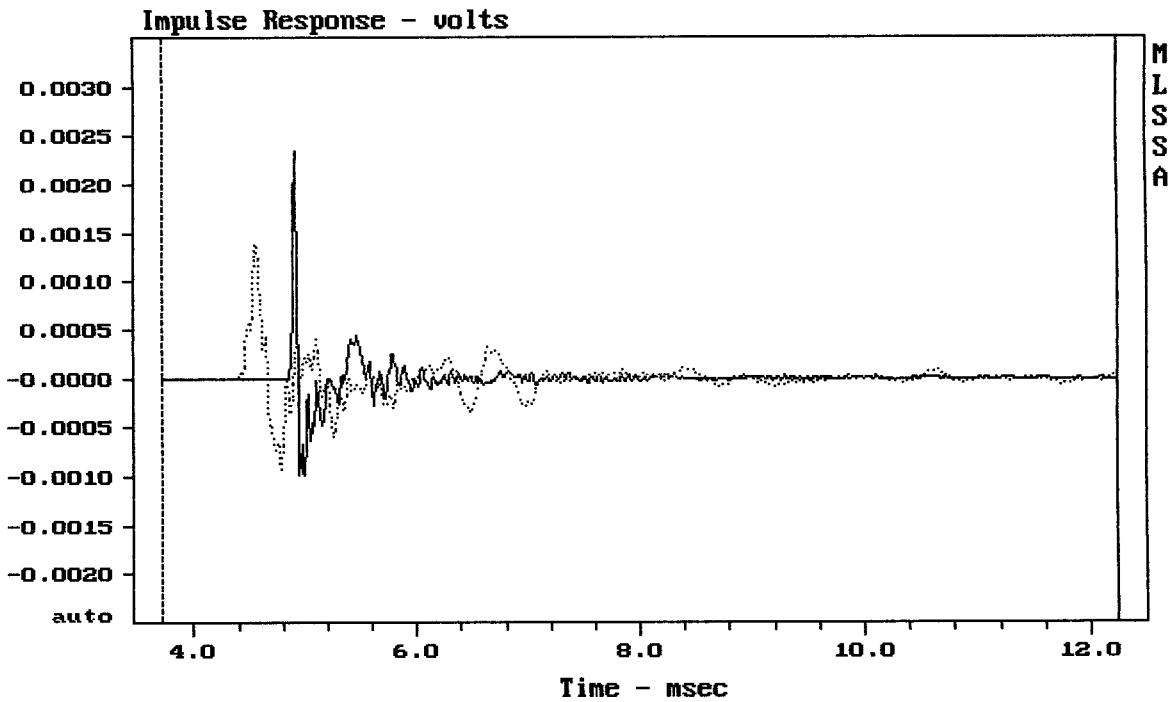

CURSOR:  $dy = 4.57896e-005$   $x = 12.2430$  (1113)

COAX 15" FROM EAW MW15



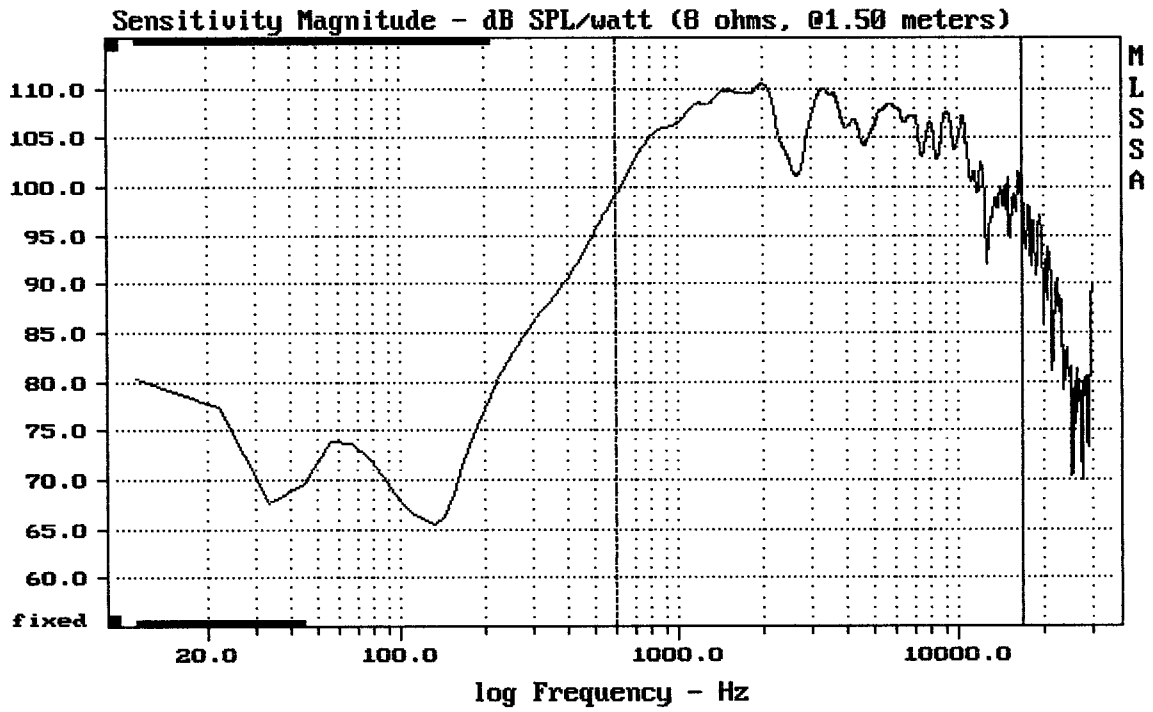


---

Level (599:17001 Hz) = 106.70 dB SPL/watt (8 ohms, @1.50 meters)


---

COAX 15" FROM EAW MW15

MLSSA: Frequency Domain

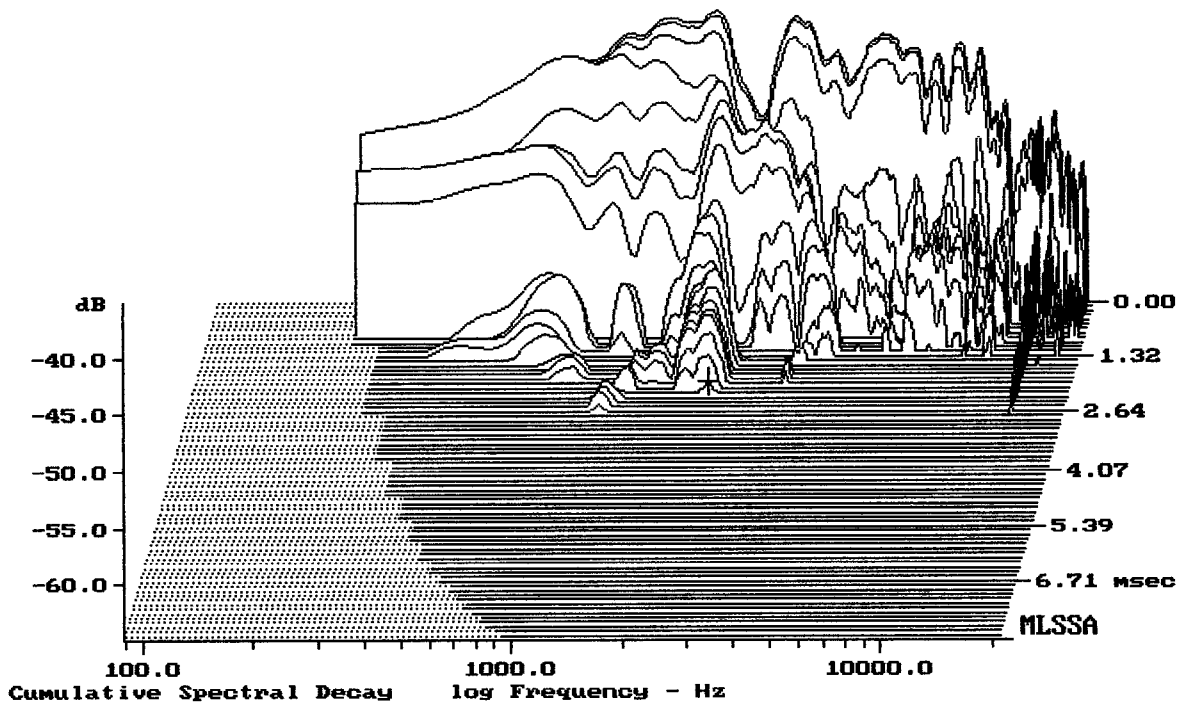


-64.01 dB, 2219 Hz (50), 2.200 msec (21)

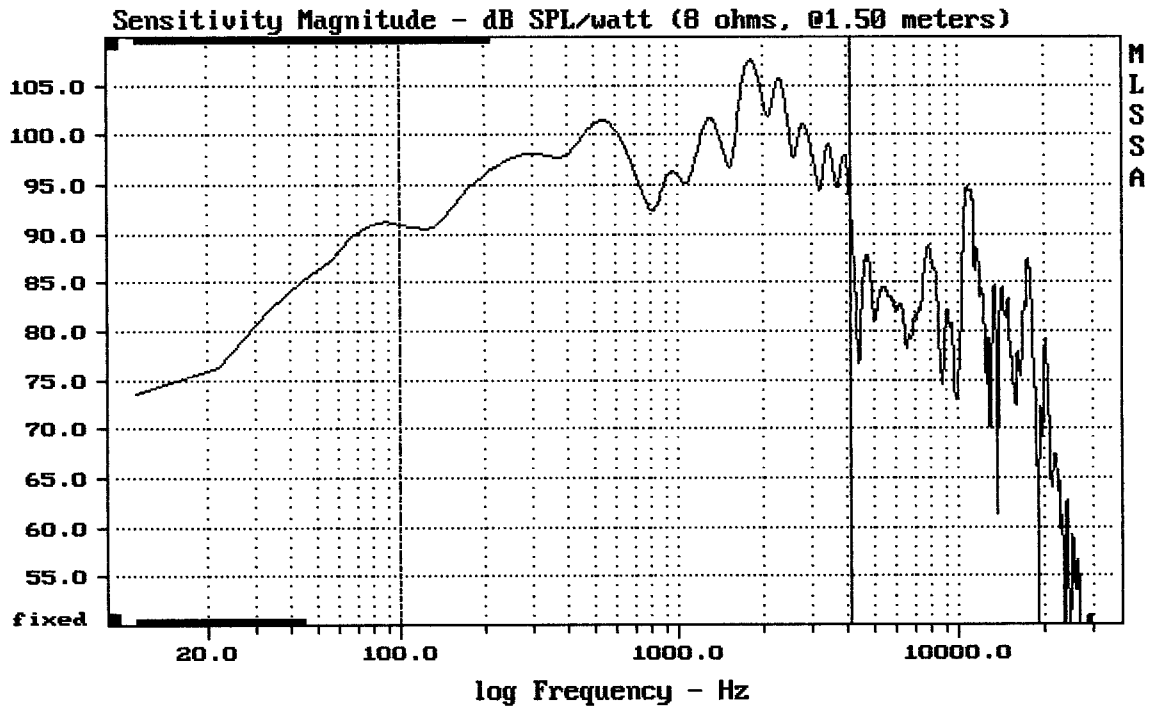

Level (100:4150 Hz) = 99.37 dB SPL/watt (8 ohms, @1.50 meters)

COAX 15" FROM EAW MW15

MLSSA: Frequency Domain

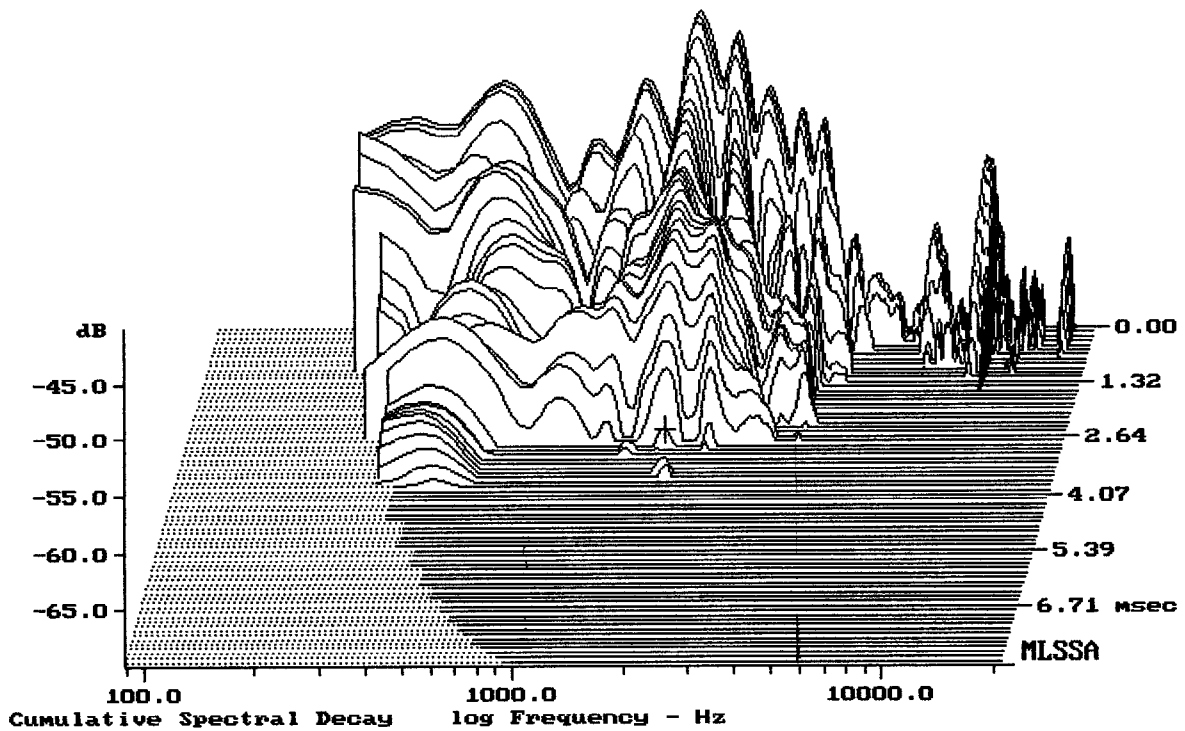

-68.60 dB, 1776 Hz (40), 2.860 msec (27)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	44.20	Hz
3	Re	5.26	Ohms[dc]
4	Res	116.40	Ohms
5	Qms	6.08	
6	Qes	0.27	
7	Qts	0.26	
8	L1	0.29	mH
9	L2	1.56	mH
10	R2	4.07	Ohms
11	RMSE-load	0.80	Ohms
12	Vas(Sd)	123.04	liters
13	Mms	94.73	grams
14	Cms	137	$\mu\text{M}/\text{Newton}$
15	Bl	22.44	Tesla-M
16	SPLref(Sd)	97.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 800.00 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.8% (-20% to -50% is recommended).

15" FROM EAW MW15

MLSSA: Parameters

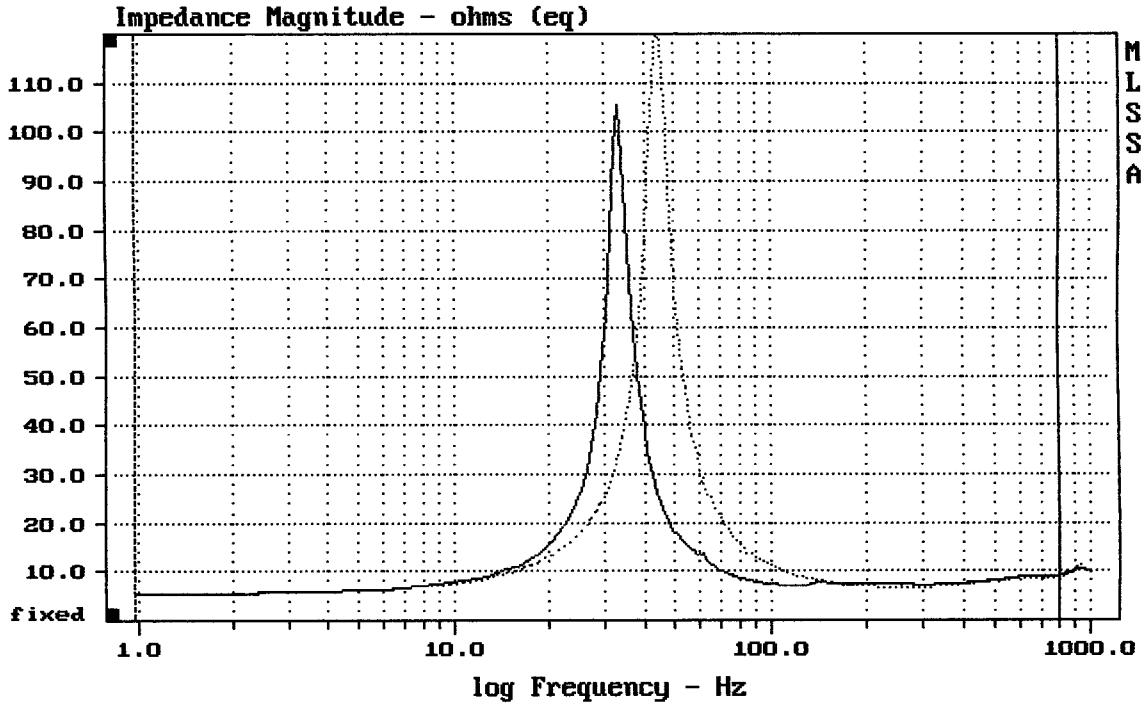

mean: 10.49, rms: 16, std: 12.08, max: 120.4, min: 5.423

MLSSA: Frequency Domain