


mean: 97.44, rms: 97.70, std: 1.93, max: 101.42, min: 85.14


EAW NT59

MLSSA: Frequency Domain

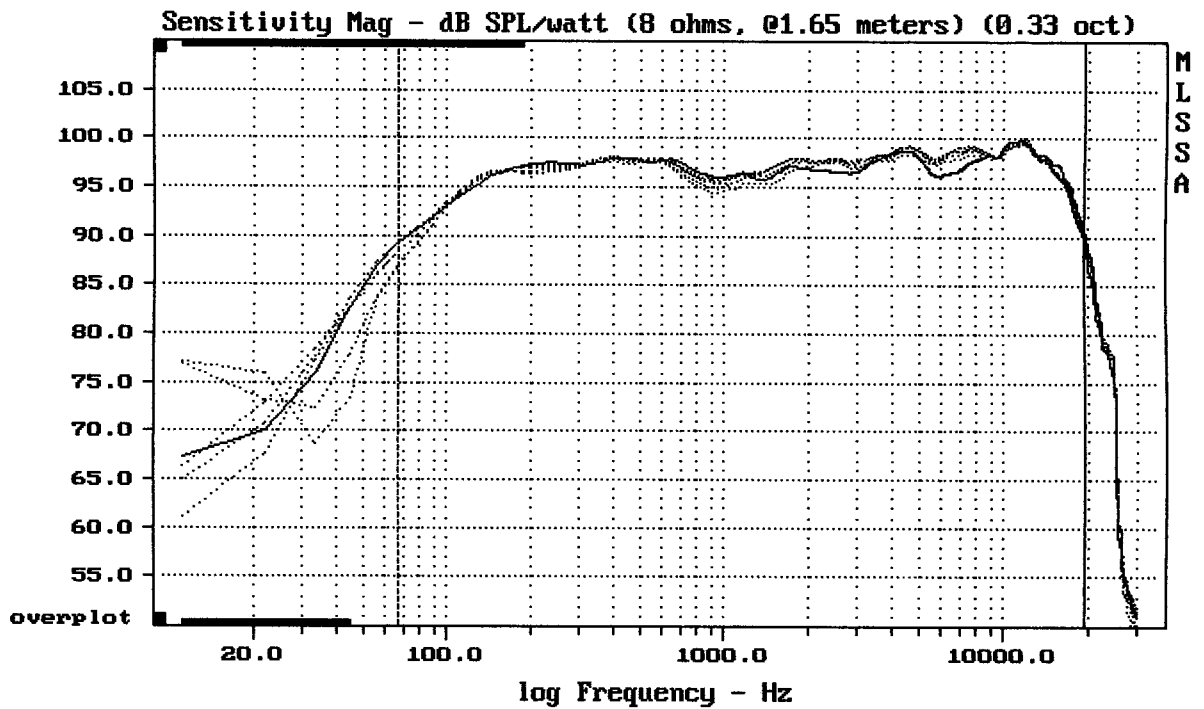


mean: 97.47, rms: 97.67, std: 1.69, max: 100.07, min: 88.33

EAW NT59

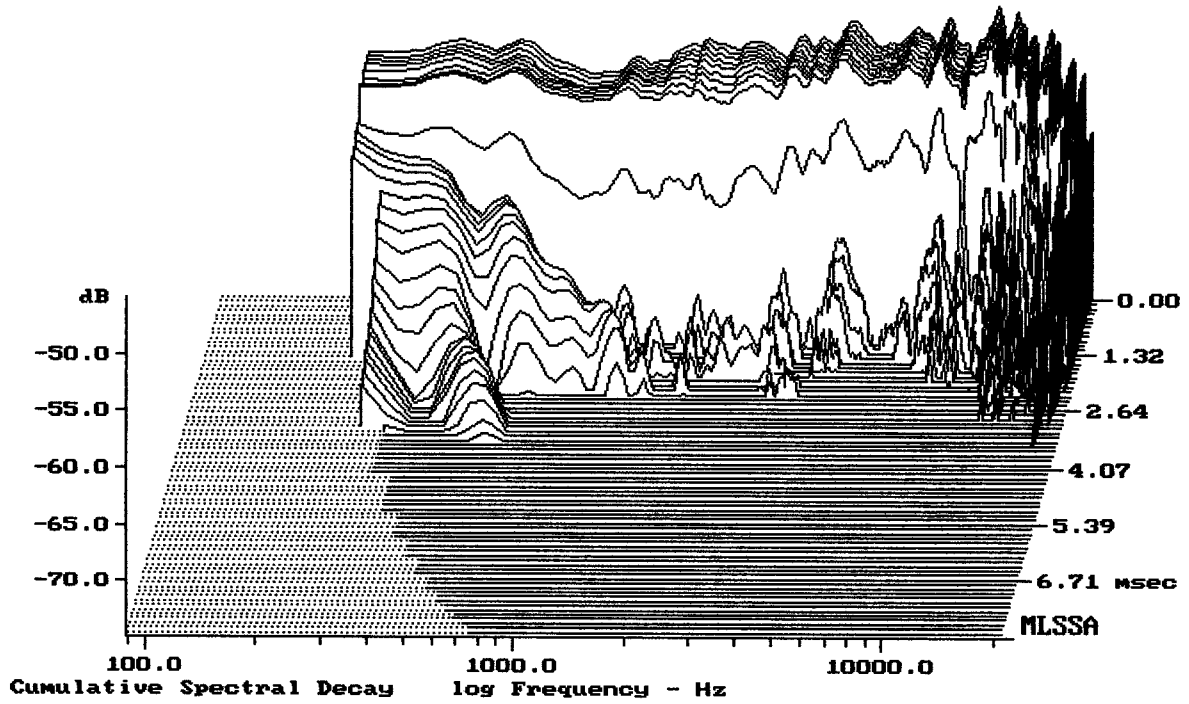


-73.03 dB, 3551 Hz (80), 2.310 msec (22)

DTTO

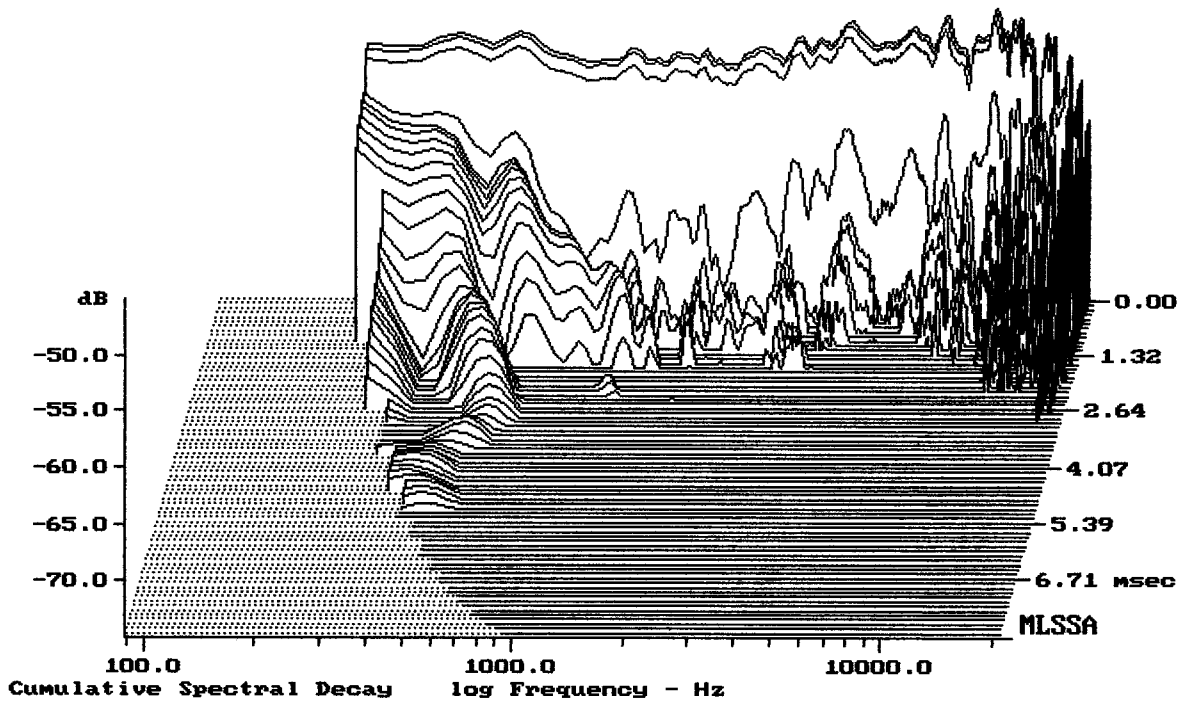


-72.12 dB, 3596 Hz (81), 1.650 msec (16)

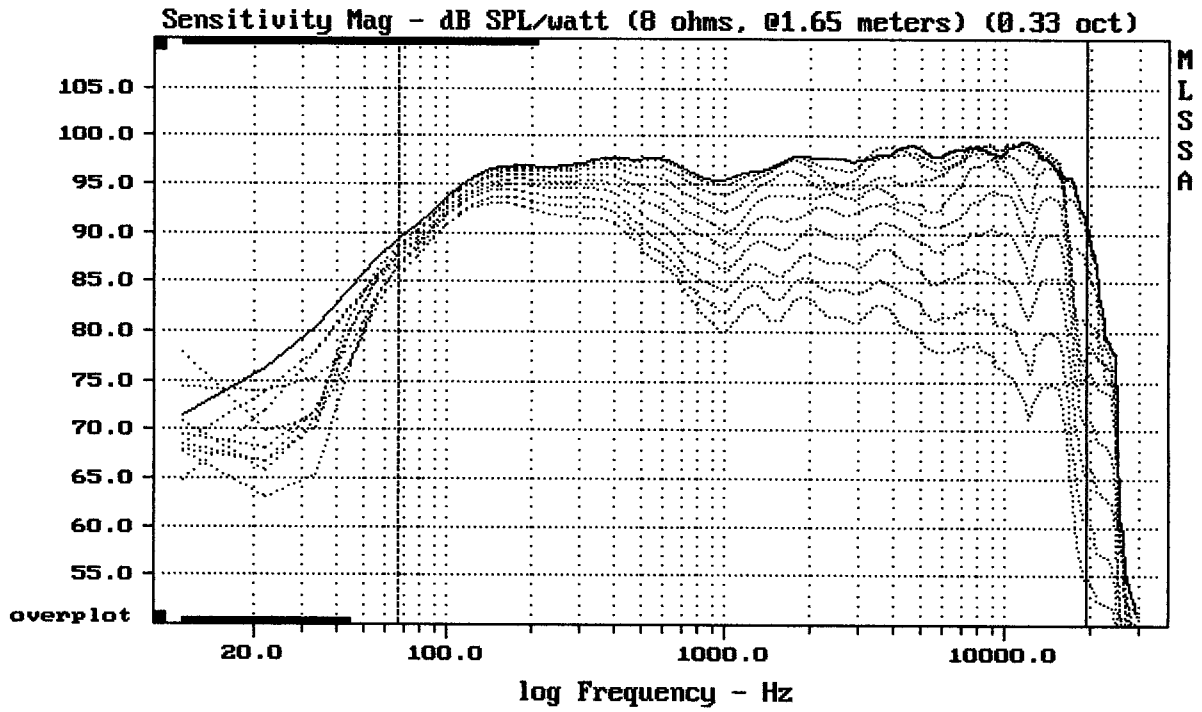

Overlay Compare: dev= +20/-15, std= 6.5, avg= -22


EAW NT59

MLSSA: Frequency Domain

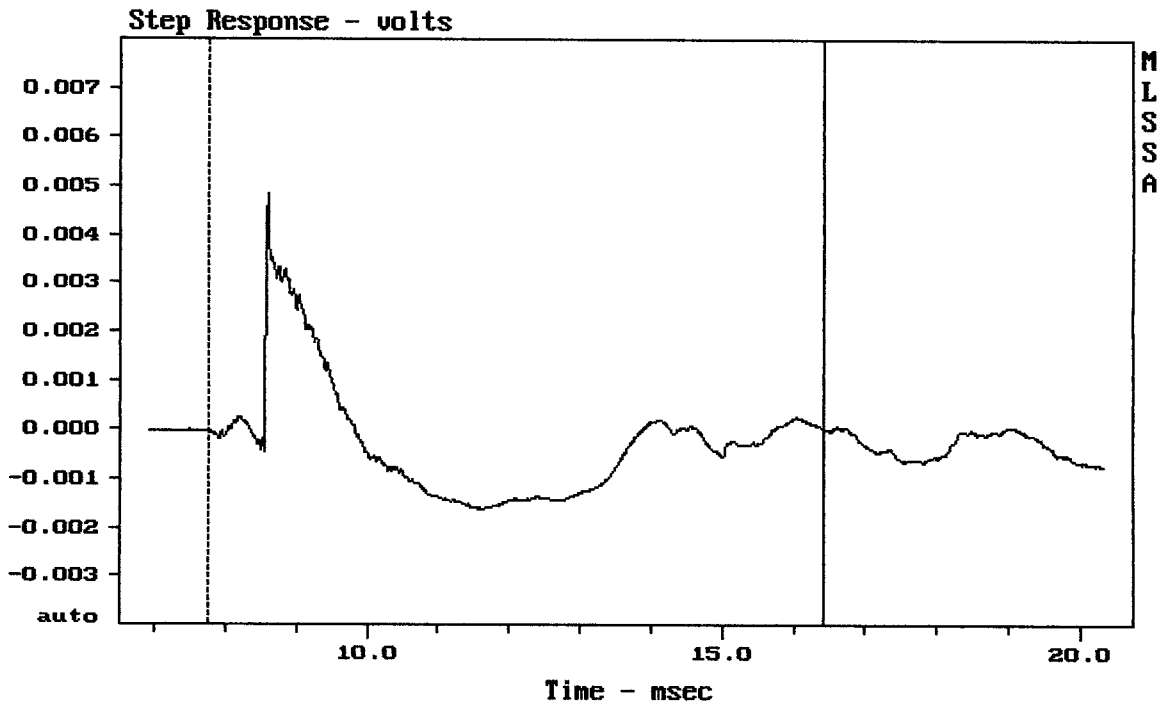

mean: -0.0002578, rms: 0.001204, std: 0.001176, max: 0.004854, min: -0.001615


EAW NT59

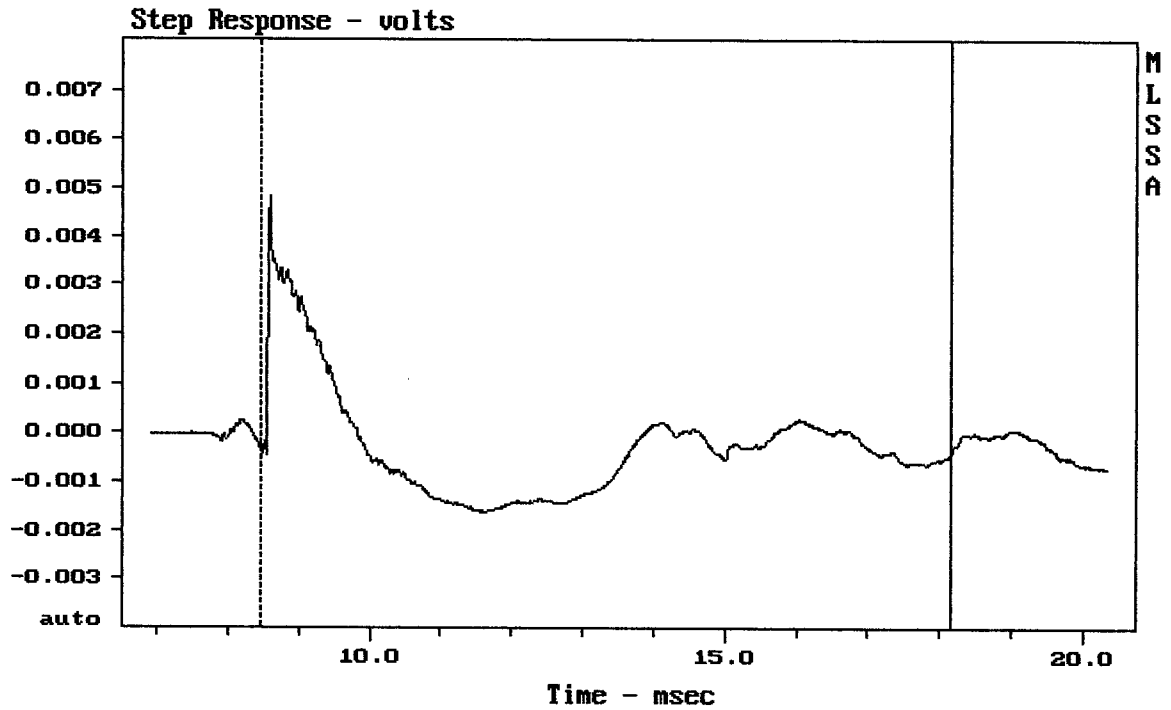

mean: -0.0002938, rms: 0.001151, std: 0.001113, max: 0.004854, min: -0.001615


EAW NT59

MLSSA: Time Domain

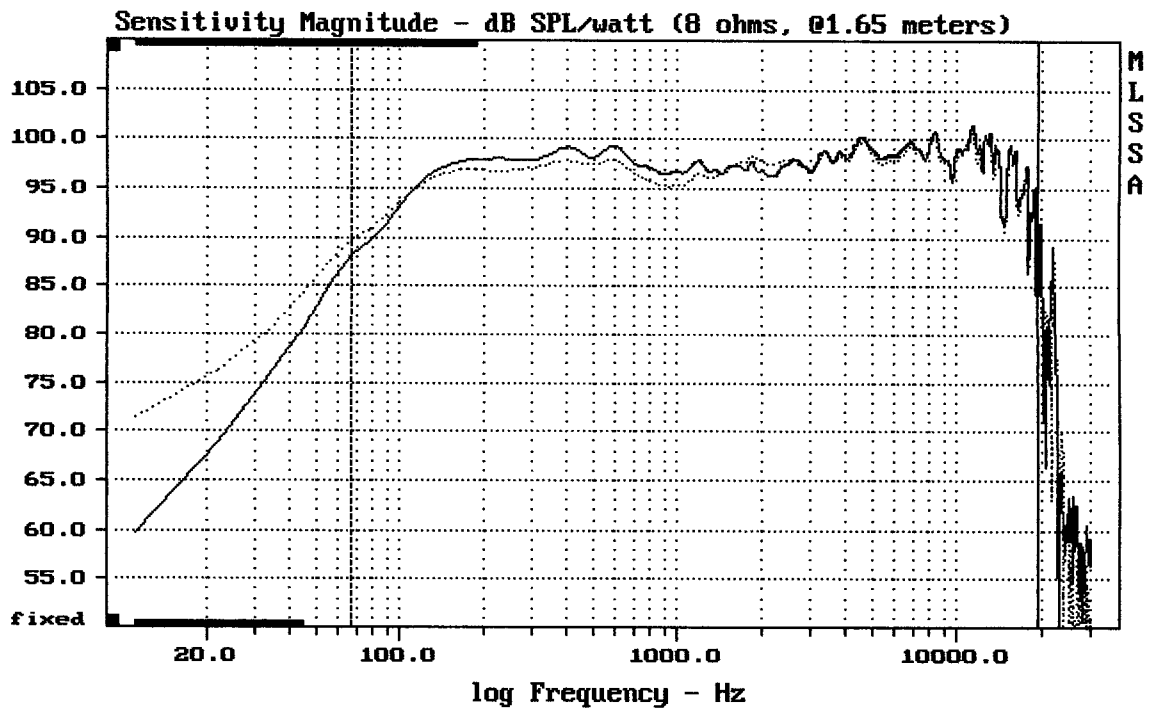

Overlay Compare: dev= +1.2/-2.8, std= 0.62, avg= 0.31


EAW NT59

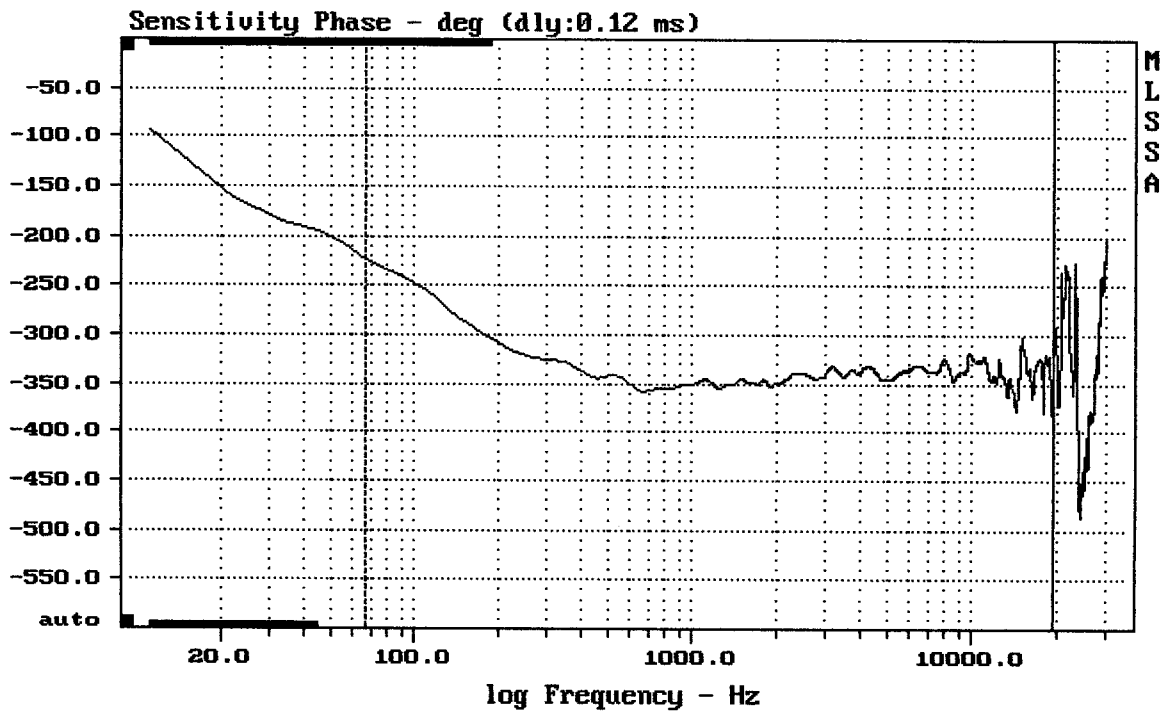

mean: -338, rms: 338.3, std: 13.92, max: -224, min: -382.3


EAW NT59

MLSSA: Frequency Domain

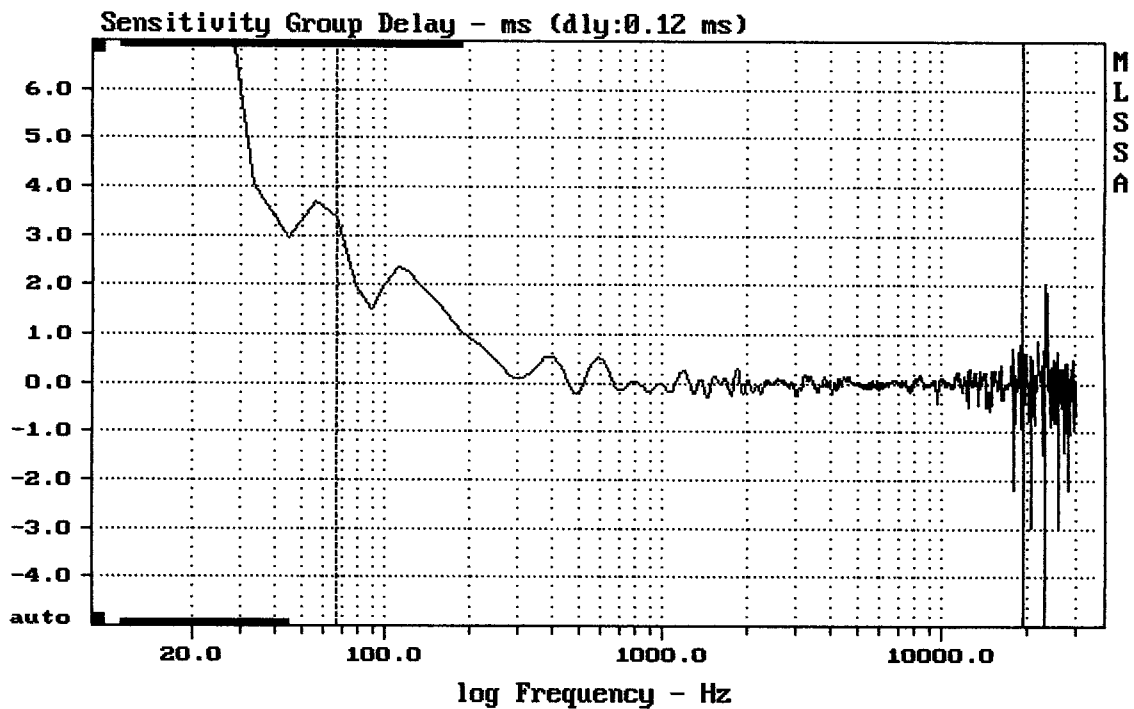

mean: 0.01562, rms: 0.2726, std: 0.2722, max: 3.357, min: -2.178


EAW NT59

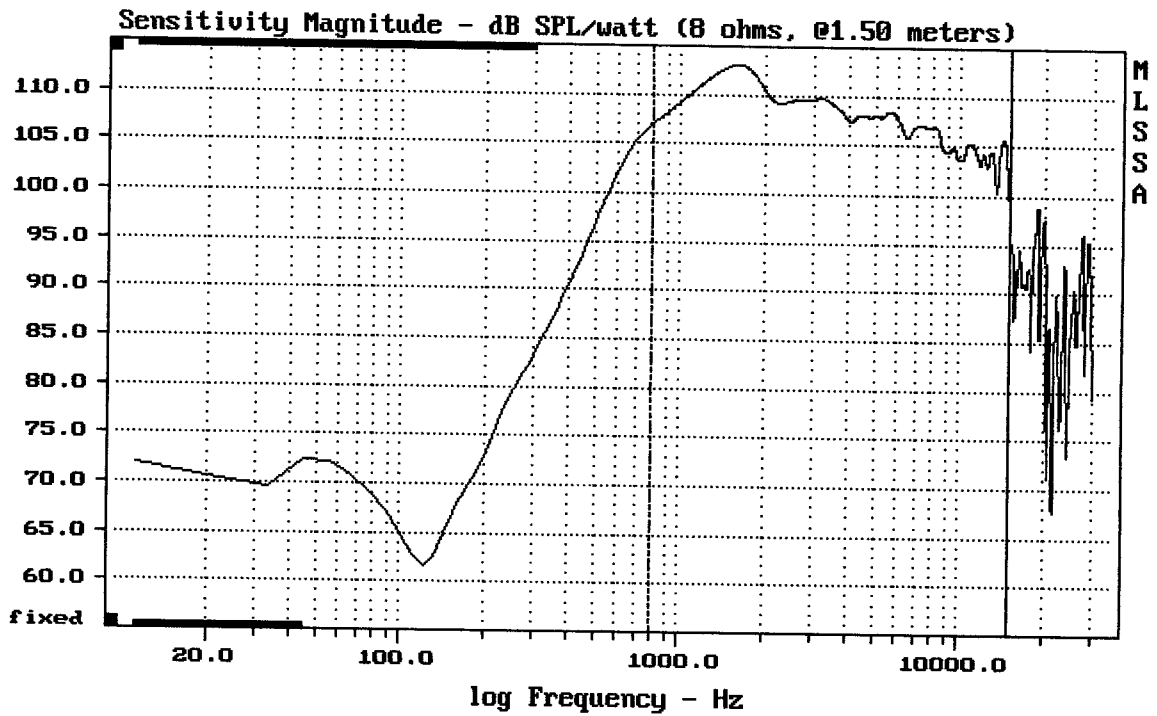


Level (799:15004 Hz) = 109.07 dB SPL/watt (8 ohms, @1.50 meters)

EAW 1.4" FROM NT59 + ME90

MLSSA: Frequency Domain

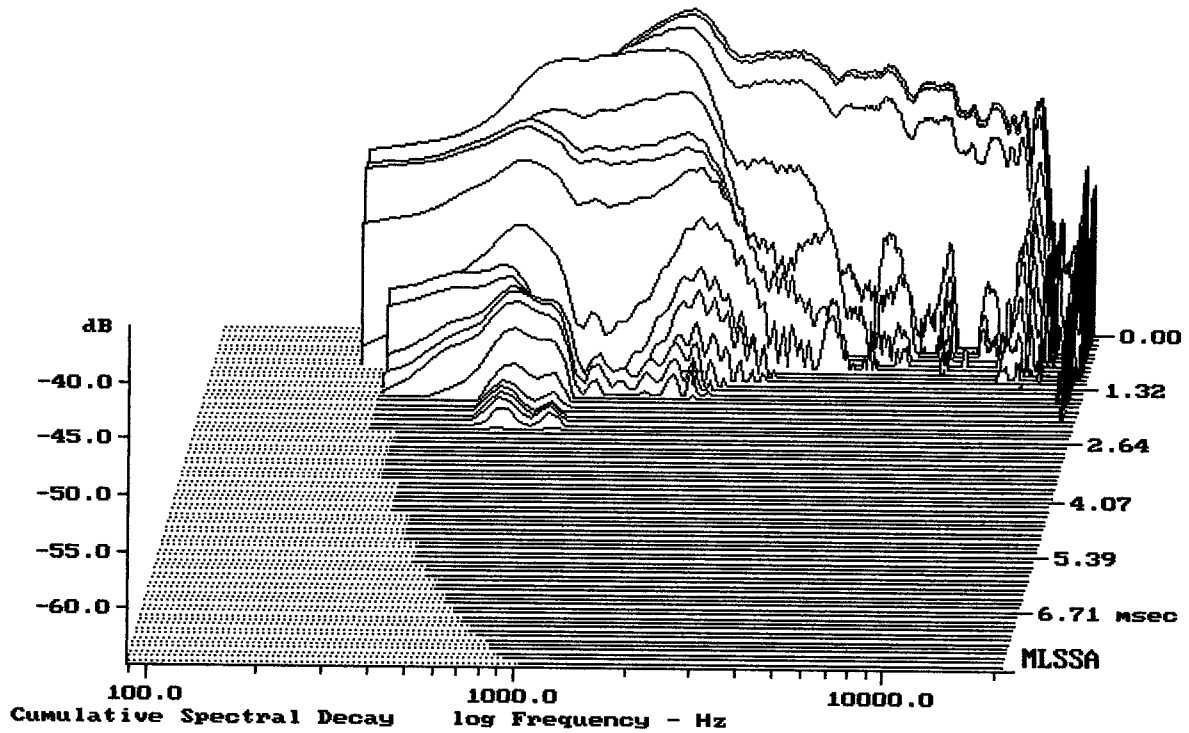


-62.92 dB, 1864 Hz (42), 1.540 msec (15)

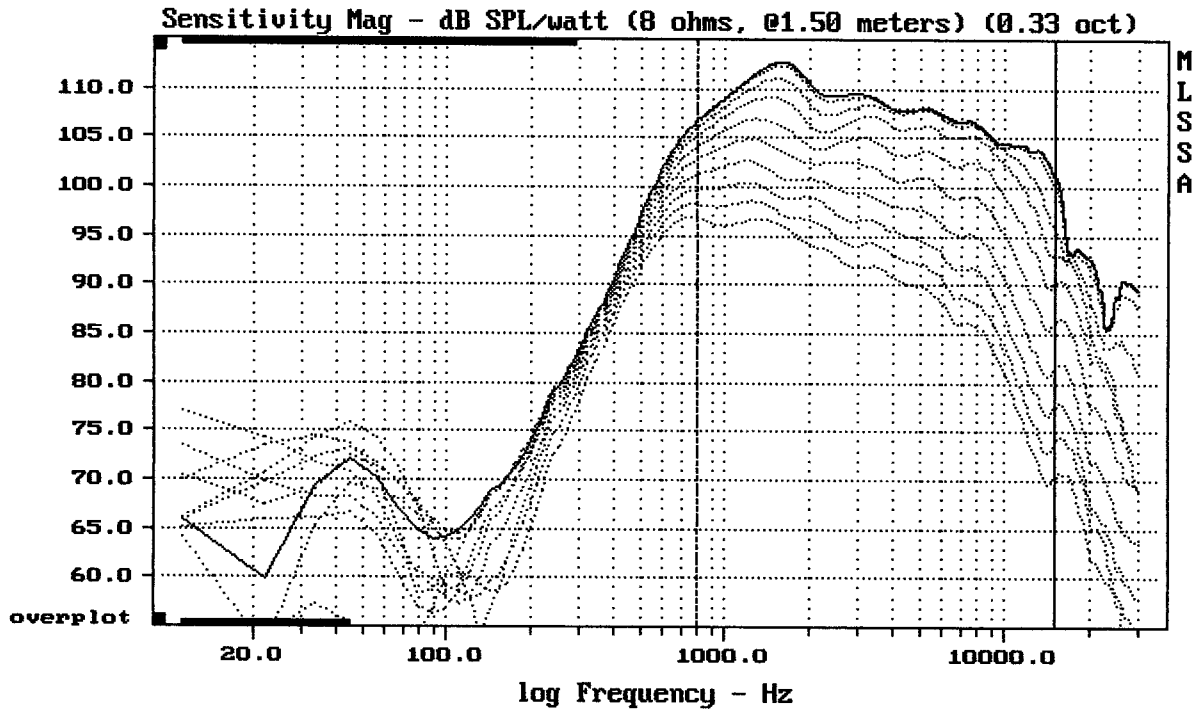

Overlay Compare: dev= +13/-10, std= 5.9, avg= -23


EAW 1.4" FROM NT59 + ME90

MLSSA: Frequency Domain

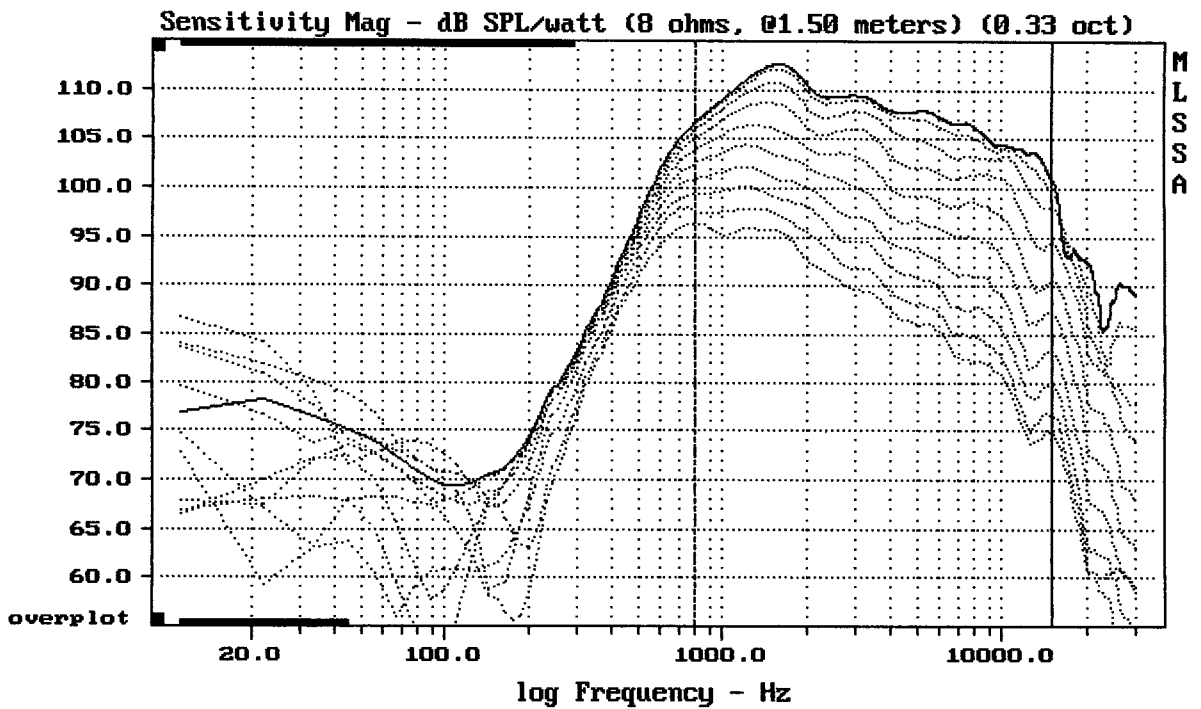

Overlay Compare: dev= +13/-6.7, std= 4, avg= -23


EAW 1.4" FROM NT59 + ME90

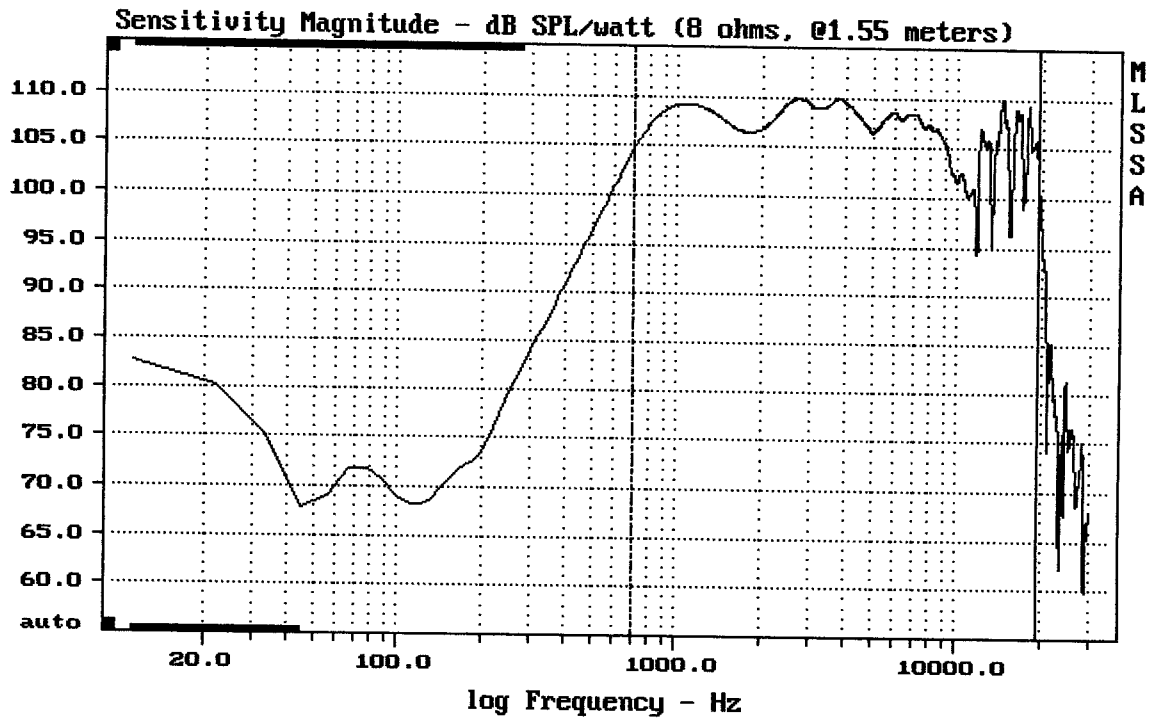


Level (699:19509 Hz) = 107.65 dB SPL/watt (8 ohms, @1.55 meters)

1.4" HORN FROM EAW NT59 + DE700

MLSSA: Frequency Domain

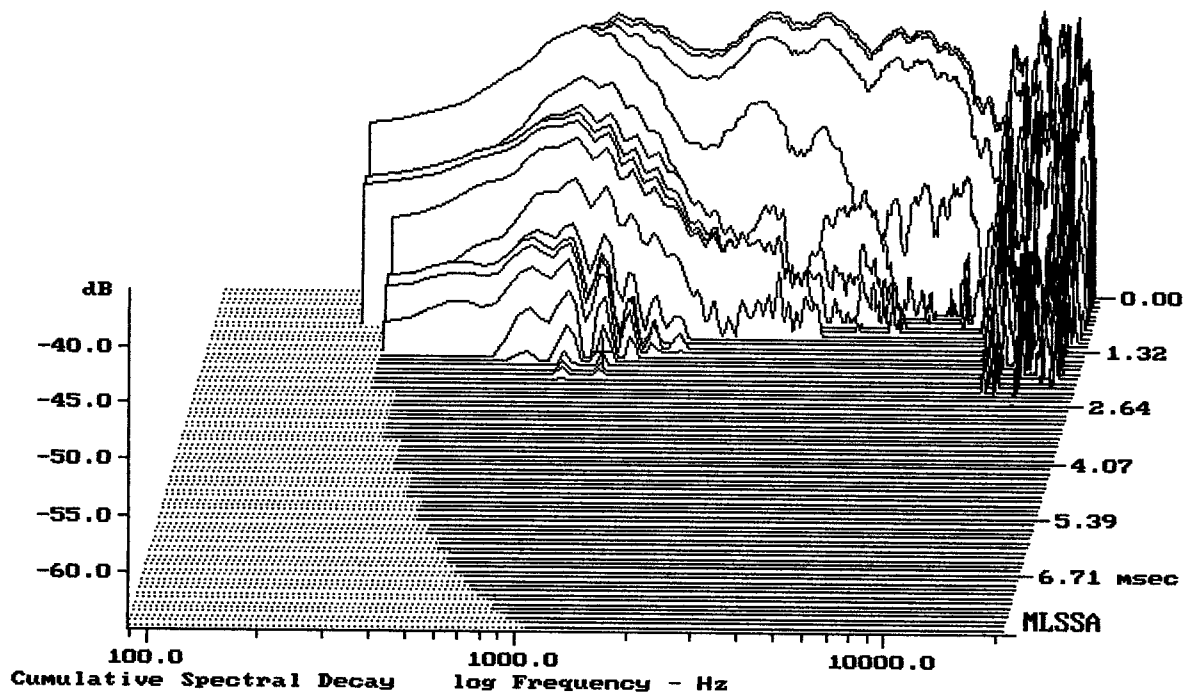


-63.77 dB, 1065 Hz (24), 1.760 msec (17)

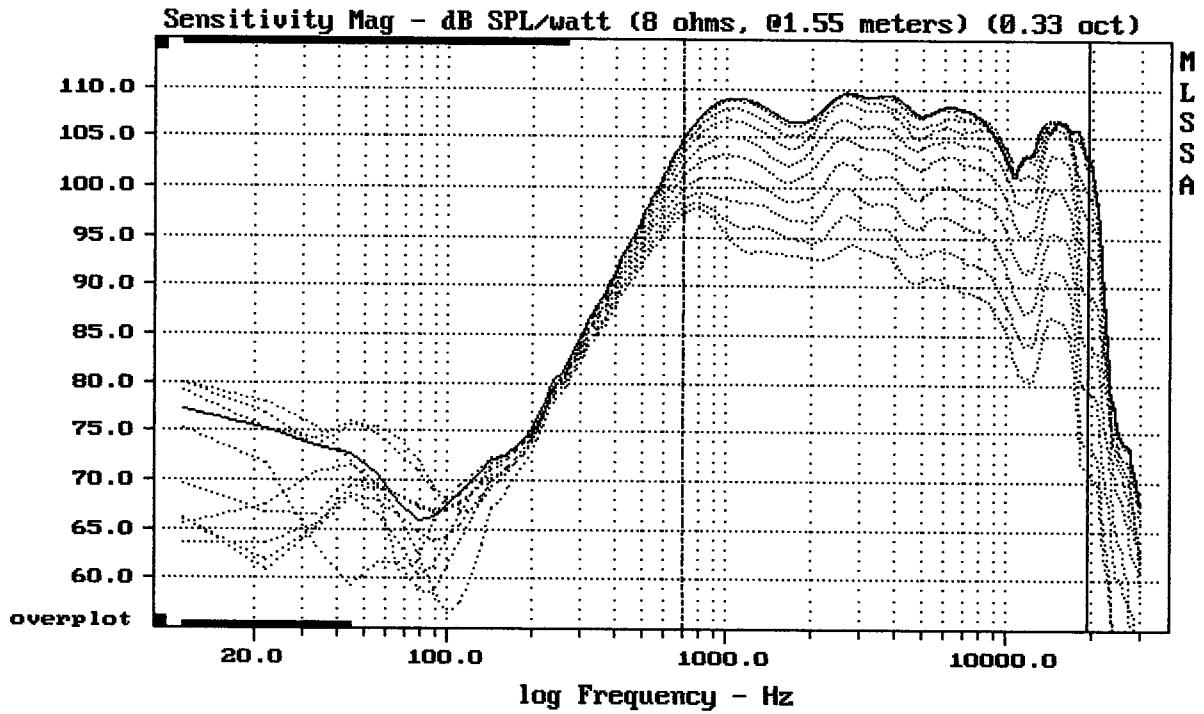

Overlay Compare: dev= +12/-13, std= 4.7, avg= -20


1.4" HORN FROM EAW NT59 + DE700

MLSSA: Frequency Domain

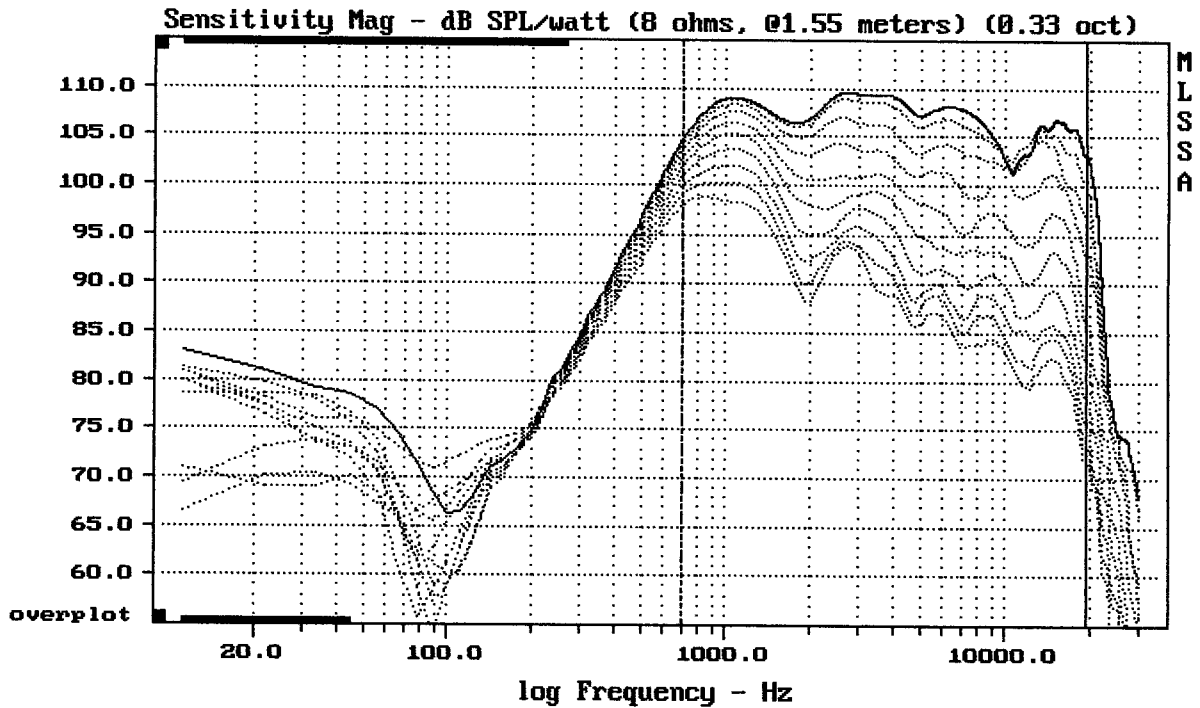

Overlay Compare: dev= +16/-8.8, std= 4.4, avg= -22


1.4" HORN FROM EAW NT59 + DE700

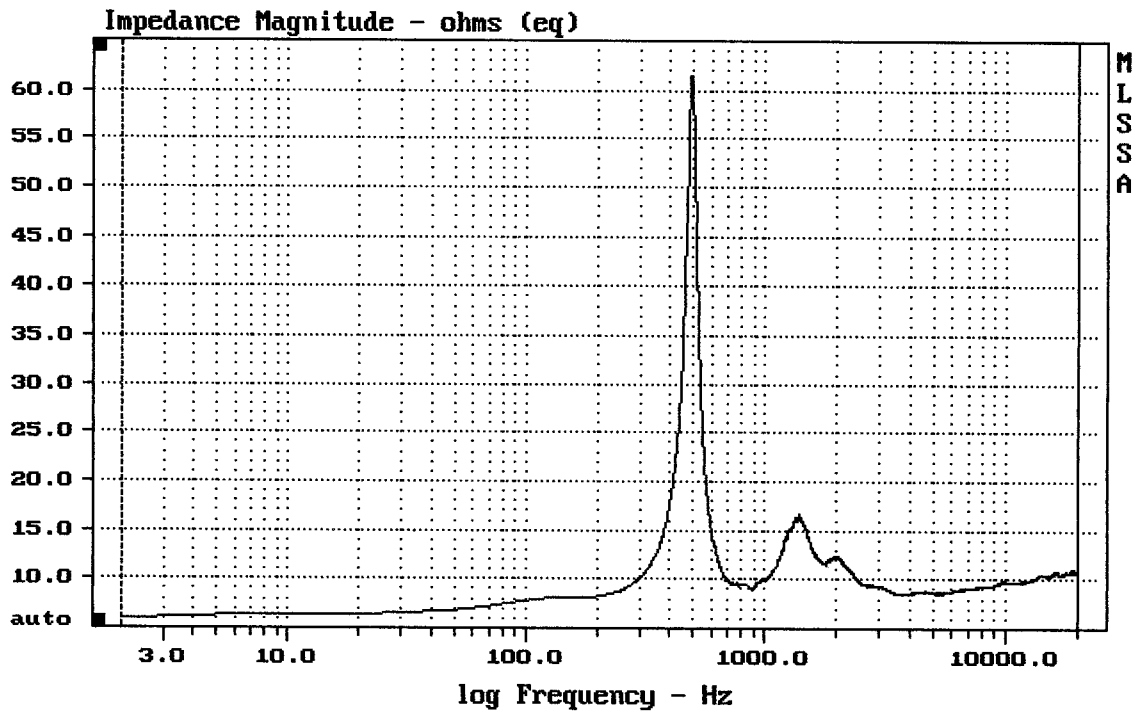

mean: 10.18, rms: 10.59, std: 2.929, max: 61.42, min: 6.018


EAW 1.4''+ HORN FROM NT59 P/N 0011626 DN14/3002-8

MLSSA: Frequency Domain

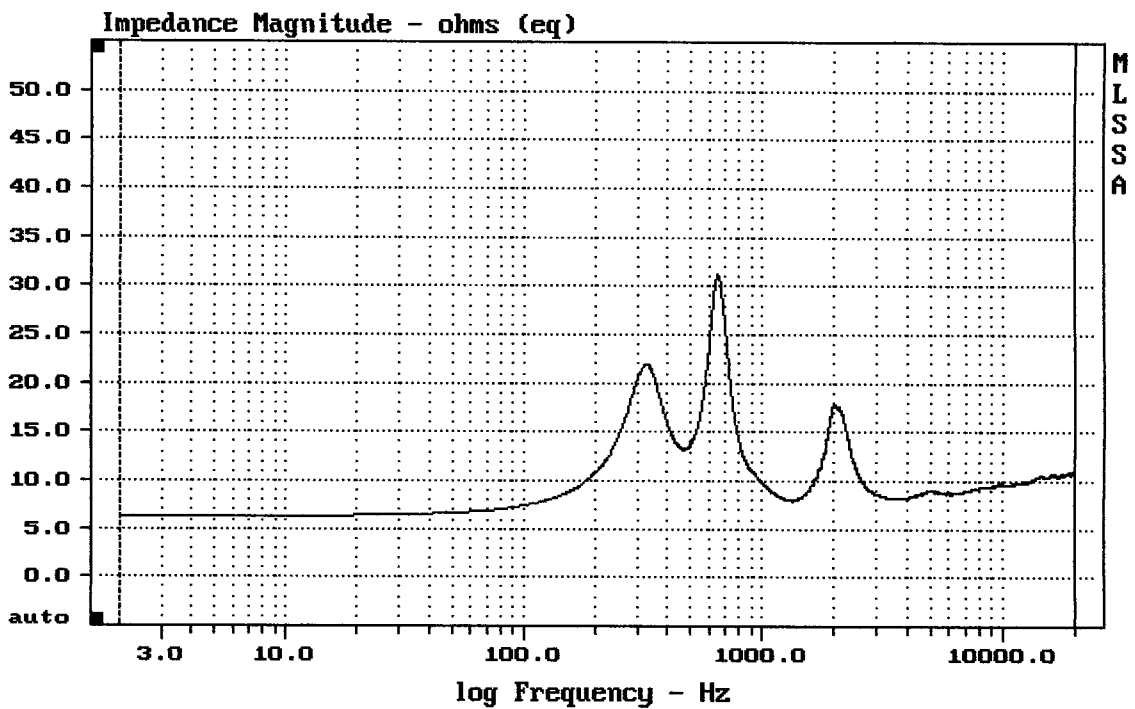

mean: 10.19, rms: 10.43, std: 2.25, max: 31.14, min: 6.219


DT10 W/O HORN

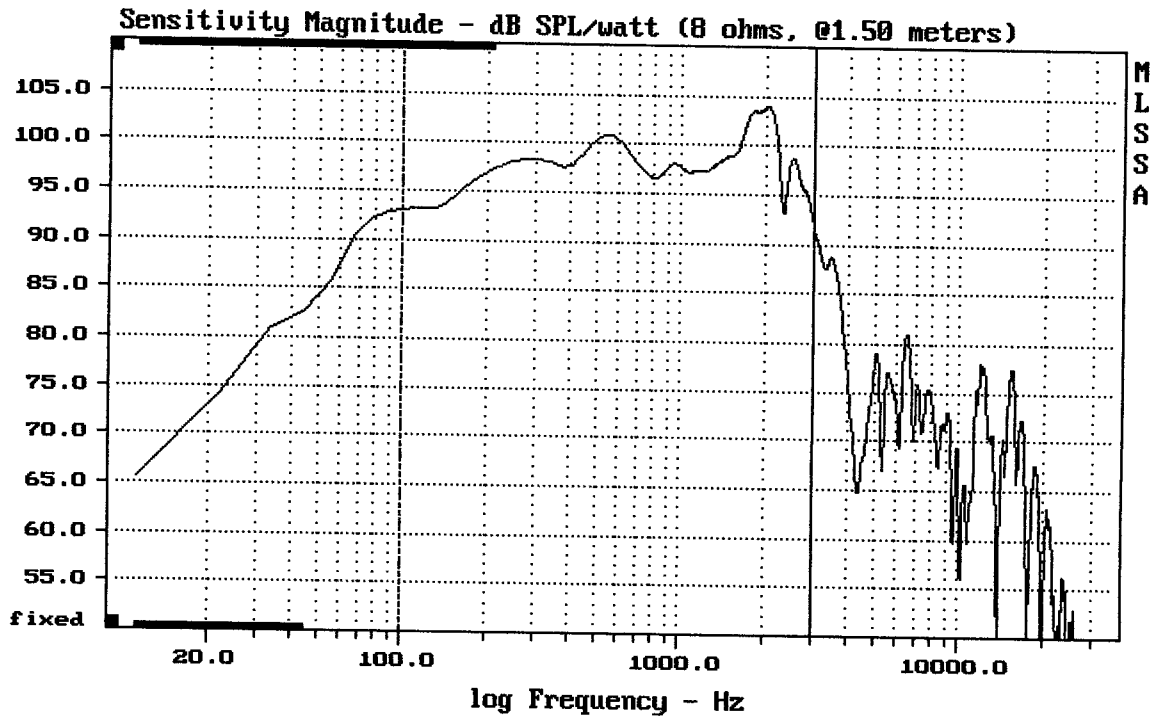

Level (100:2996 Hz) = 98.45 dB SPL/watt (8 ohms, @1.50 meters)

EAW 15" FROM NT59

MLSSA: Frequency Domain

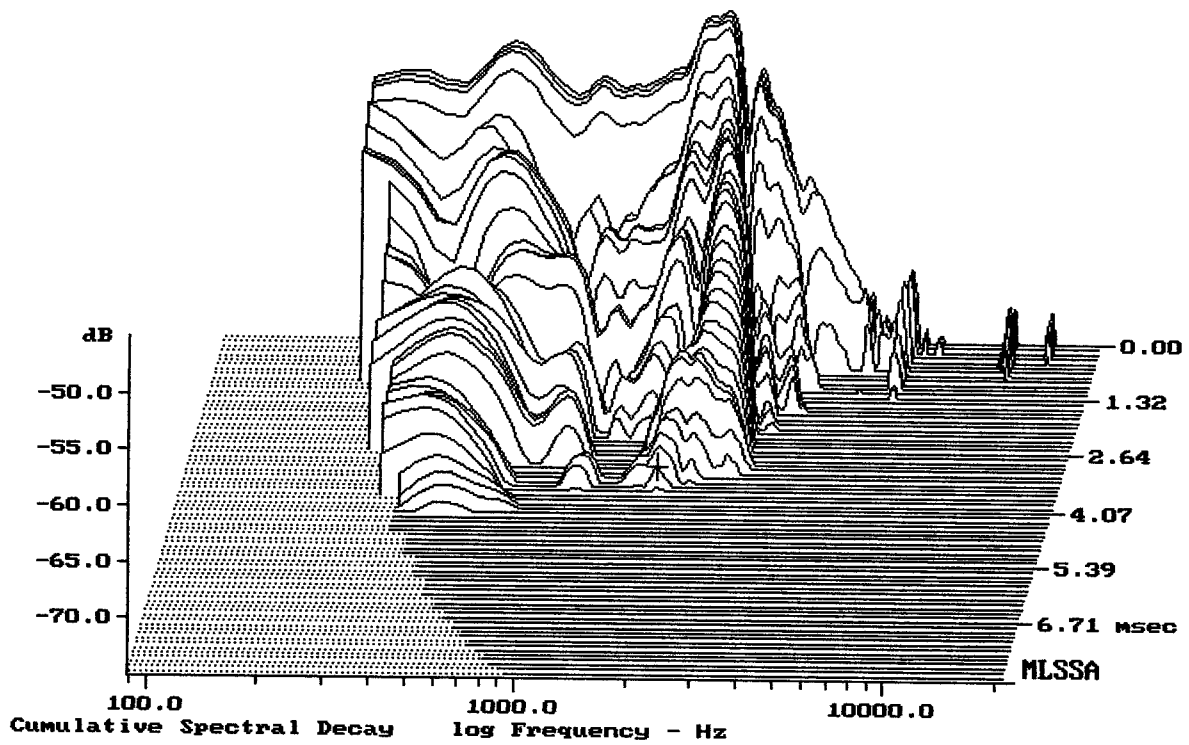

-73.17 dB, 1731 Hz (39), 3.520 msec (33)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.46	Ohms
2	Fs	52.38	Hz
3	Re	4.21	Ohms[dc]
4	Res	51.43	Ohms
5	Qms	4.85	
6	Qes	0.40	
7	Qts	0.37	
8	L1	0.70	mH
9	L2	1.47	mH
10	R2	5.06	Ohms
11	RMSE-load	0.87	Ohms
12	Vas(Sd)	137.91	liters
13	Mms	77.51	grams
14	Cms	119	μ M/Newton
15	B1	16.44	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.4% (-20% to -50% is recommended).

EAW 15" FROM NT59 P/N 0013277 LN15/4001-4

MLSSA: Parameters

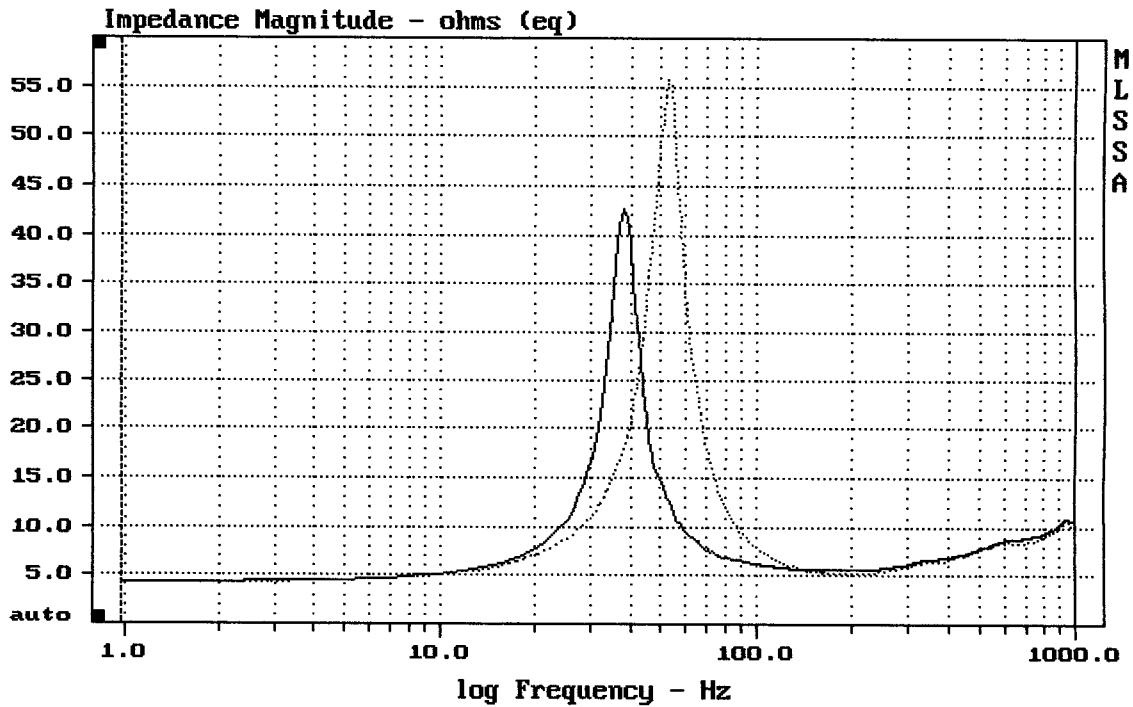

mean: 8.716, rms: 10.27, std: 5.437, max: 55.79, min: 4.285

MLSSA: Frequency Domain