


Level (55:2608 Hz) = 95.53 dB SPL/watt (8 ohms, @1.50 meters)

FANE COL18SB

MLSSA: Frequency Domain

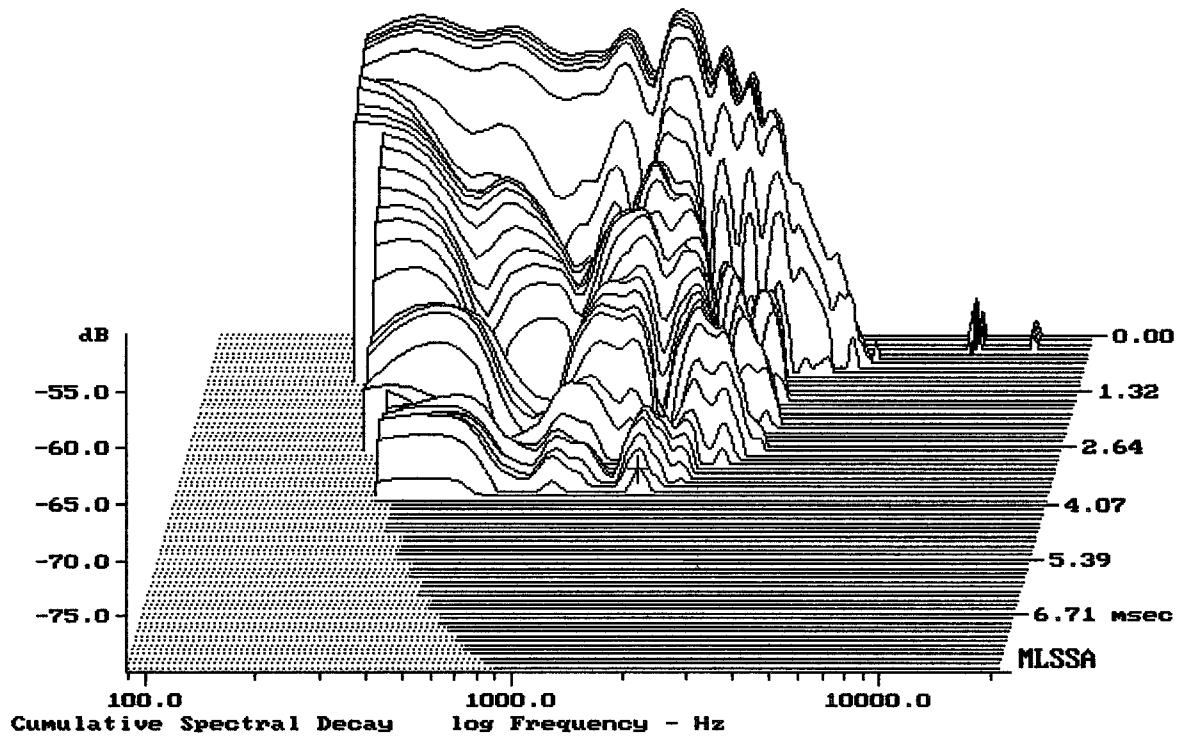

-78.03 dB, 1598 Hz (36), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.84	Ohms
2	Fs	45.88	Hz
3	Re	5.28	Ohms[dc]
4	Res	96.69	Ohms
5	Qms	9.48	
6	Qes	0.52	
7	Qts	0.49	
8	L1	1.16	mH
9	L2	1.88	mH
10	R2	6.42	Ohms
11	RMSE-load	0.73	Ohms
12	Vas(Sd)	150.16	liters
13	Mms	152.52	grams
14	Cms	79	$\mu\text{M}/\text{Newton}$
15	B1	21.18	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.0% (-20% to -50% is recommended).

FANE COL18SB

MLSSA: Parameters

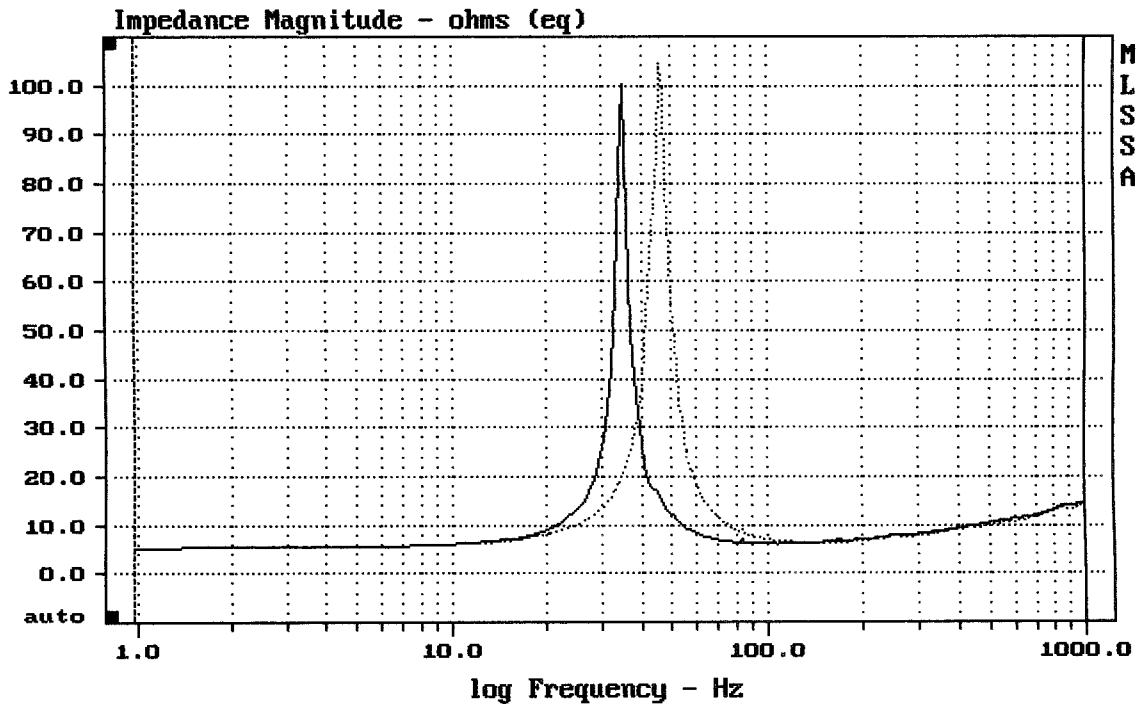

mean: 11.23, rms: 13.46, std: 7.413, max: 104.7, min: 5.314

MLSSA: Frequency Domain