


---

Level (44:244 Hz) = 101.32 dB SPL/watt (4 ohms, @1.50 meters)

---

RCF ACUSTICA S4022

MLSSA: Frequency Domain

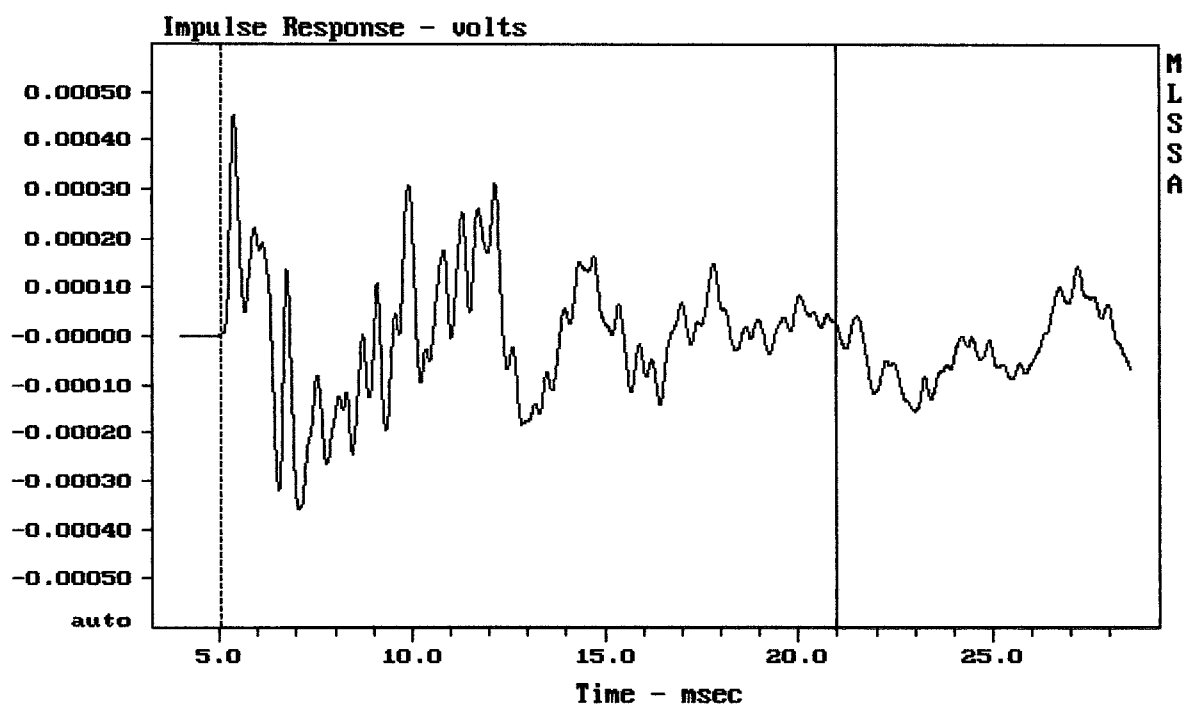


---

mean: 8.22e-006, rms: 0.000136, std: 0.0001358, max: 0.0004534, min: -0.0003603

---

RCF ACUSTICA S4022

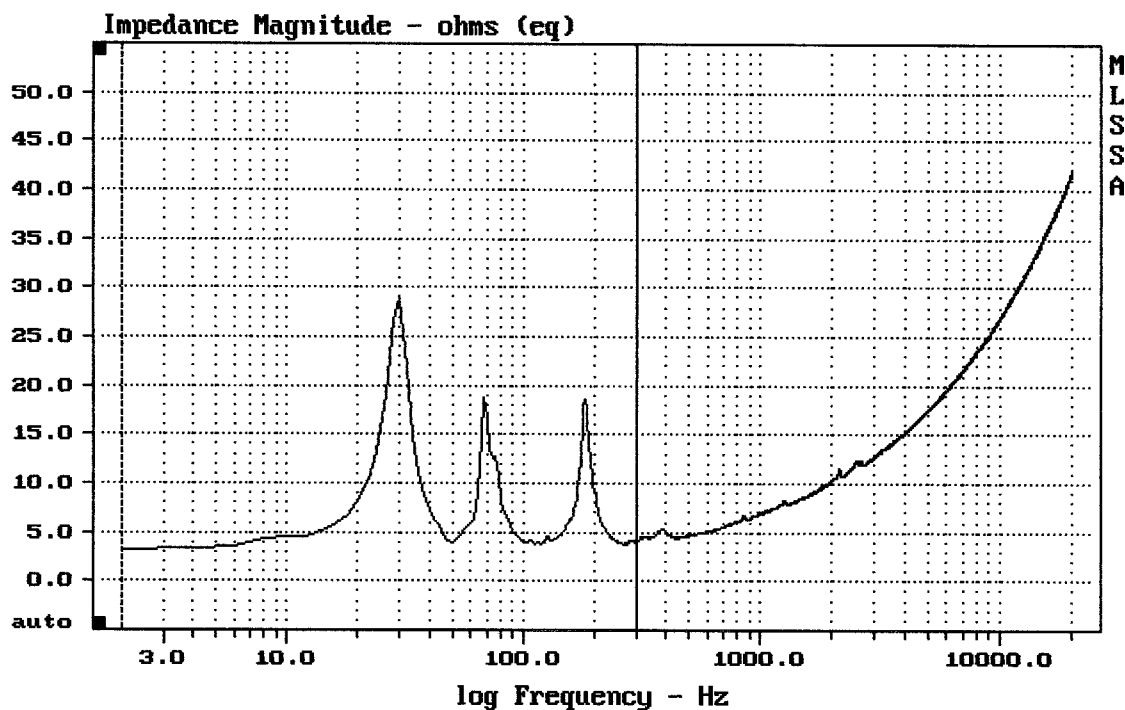


---

mean: 7.047, rms: 8.439, std: 4.643, max: 28.94, min: 3.109

---

RCF ACUSTICA S4022

MLSSA: Frequency Domain

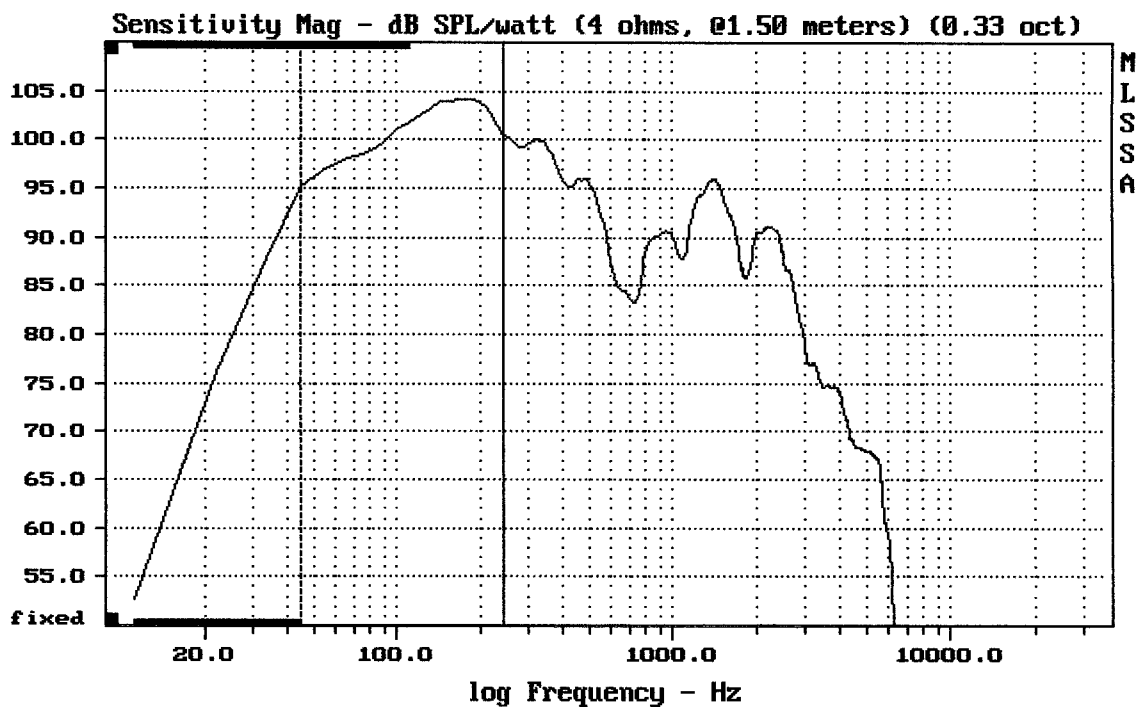


---

Level (44:244 Hz) = 101.22 dB SPL/watt (4 ohms, @1.50 meters) (0.33 oct)

---


RCF ACUSTICA S4022

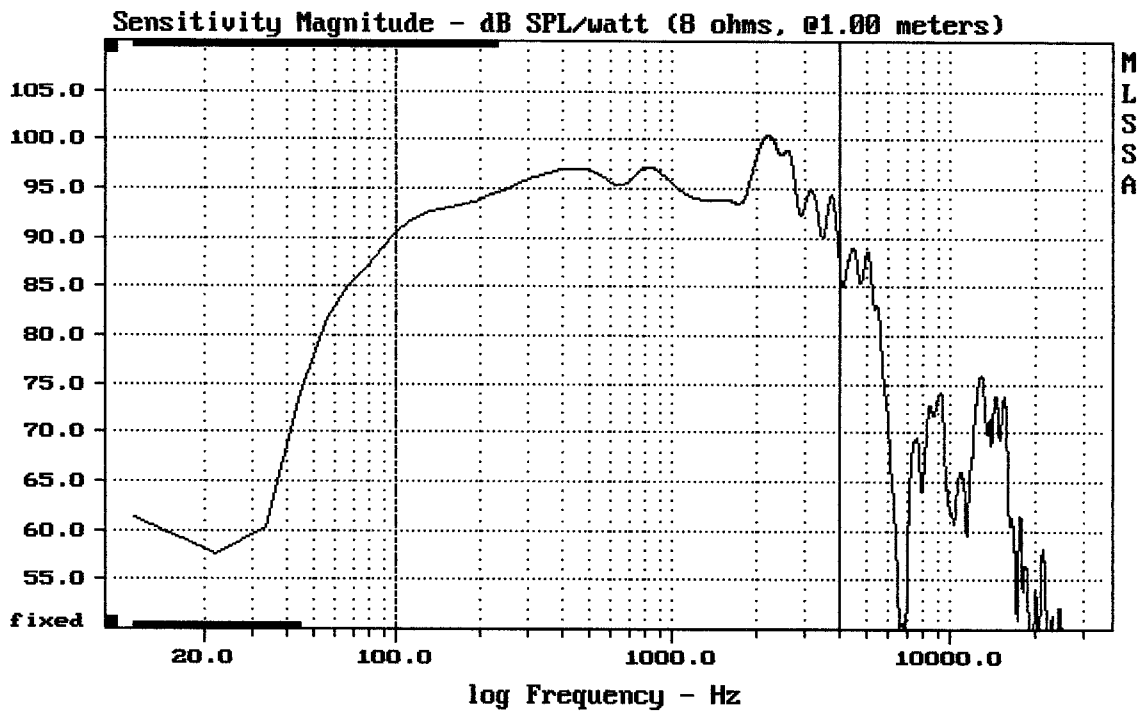

Level (100:3995 Hz) = 95.52 dB SPL/watt (8 ohms, @1.00 meters)

12" FROM RCF ACUSTICA S4022

MLSSA: Frequency Domain

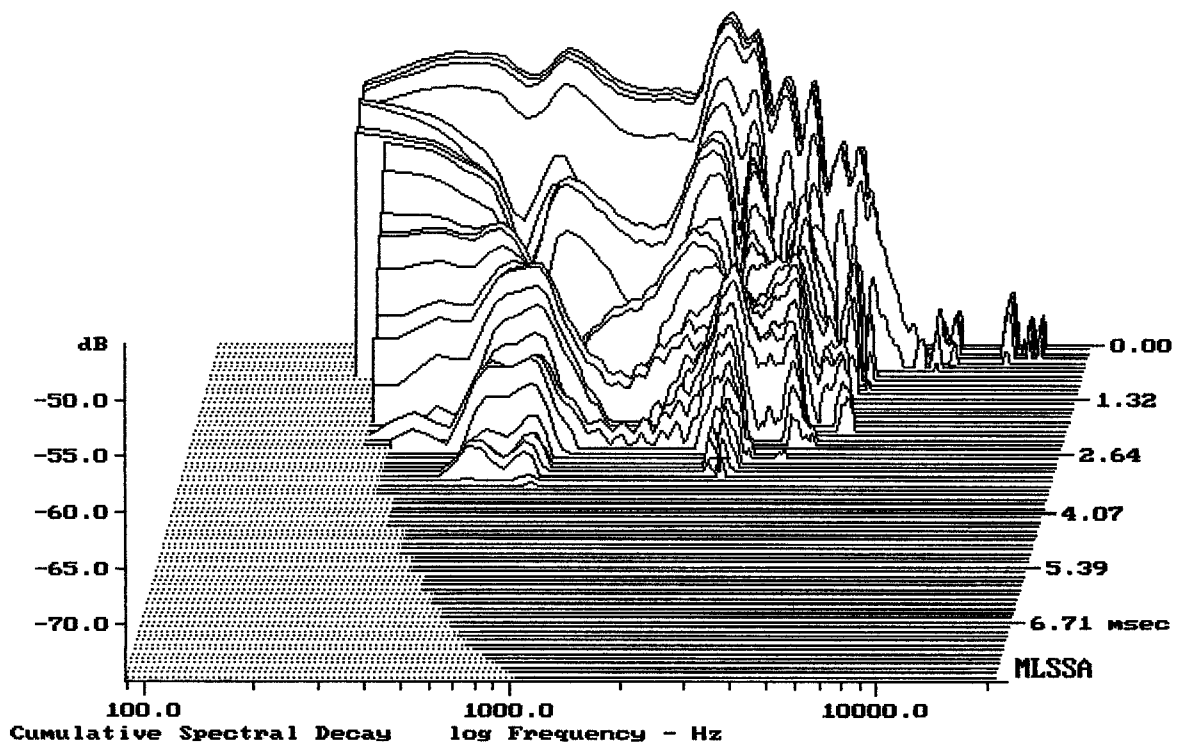

-73.44 dB, 2619 Hz (59), 3.190 msec (30)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	51.85	Hz
3	Re	5.79	Ohms[dc]
4	Res	126.61	Ohms
5	Qms	5.98	
6	Qes	0.27	
7	Qts	0.26	
8	L1	1.19	mH
9	L2	1.94	mH
10	R2	5.18	Ohms
11	RMSE-load	0.71	Ohms
12	Vas(Sd)	72.41	liters
13	Mms	51.52	grams
14	Cms	183	$\mu\text{M}/\text{Newton}$
15	B1	18.86	Tesla-M
16	SPLref(Sd)	97.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.8% (-20% to -50% is recommended).

12" FROM RCF ACUSTICA S4022

MLSSA: Parameters

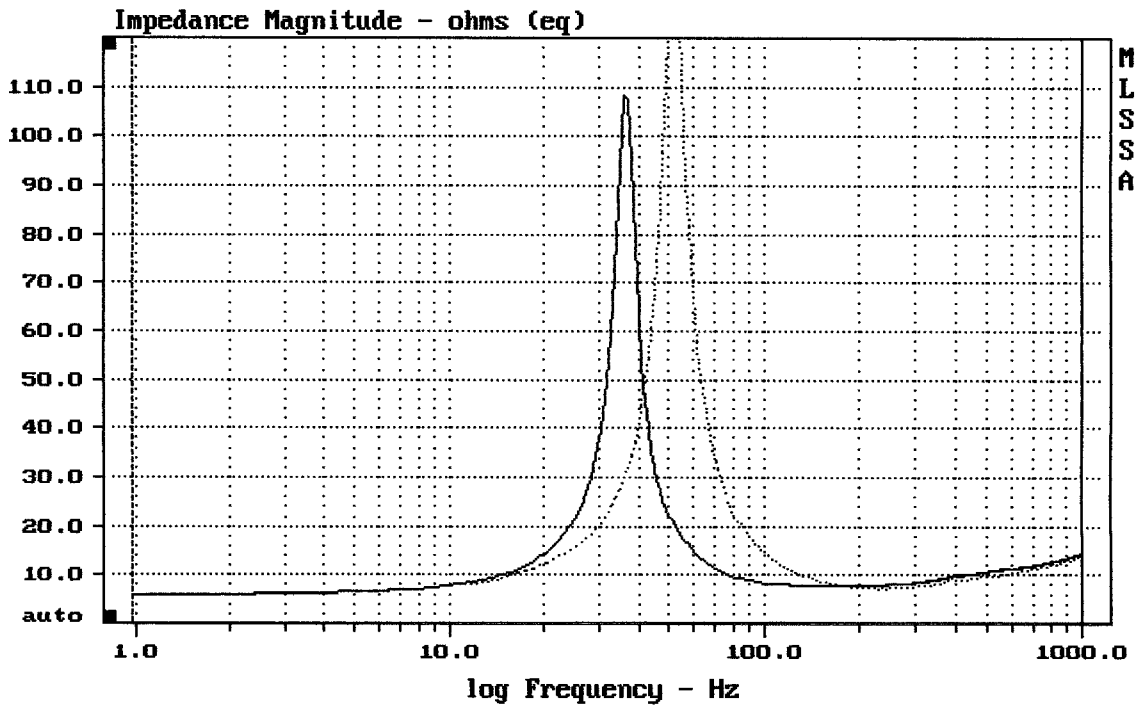

mean: 12.74, rms: 17.93, std: 12.61, max: 130.7, min: 5.874

MLSSA: Frequency Domain