



E-shop: <http://eshop.prodance.cz/ttl11ab/d-95914/>

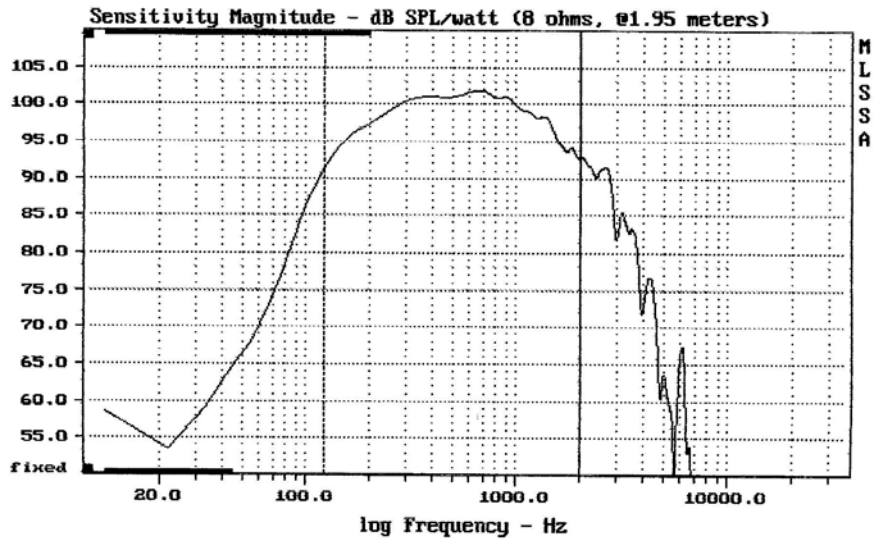

mean: 98.60, rms: 99.00, std: 2.34, max: 101.90, min: 91.24


TTL11A-B

MLSSA: Frequency Domain

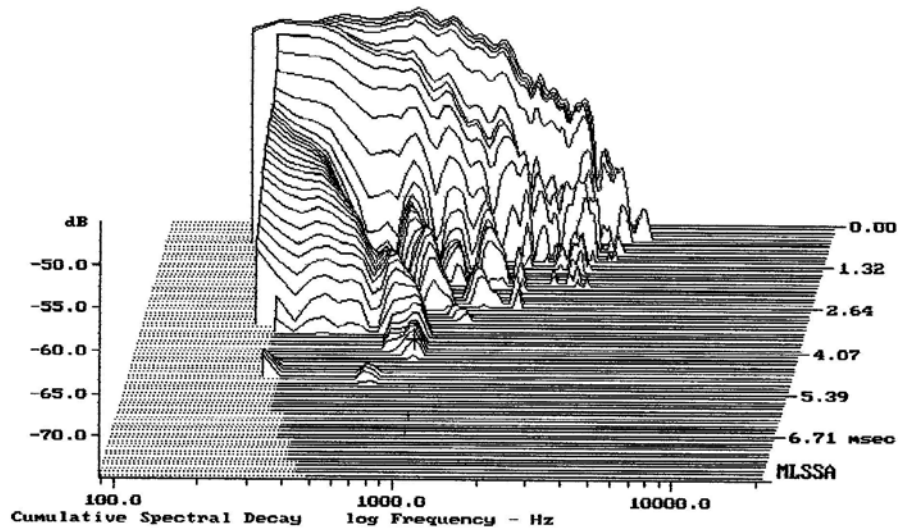

-73.06 dB, 888 Hz (20), 4.100 msec (39)


E-shop: <http://eshop.prodance.cz/ttl11ab/d-95914/>

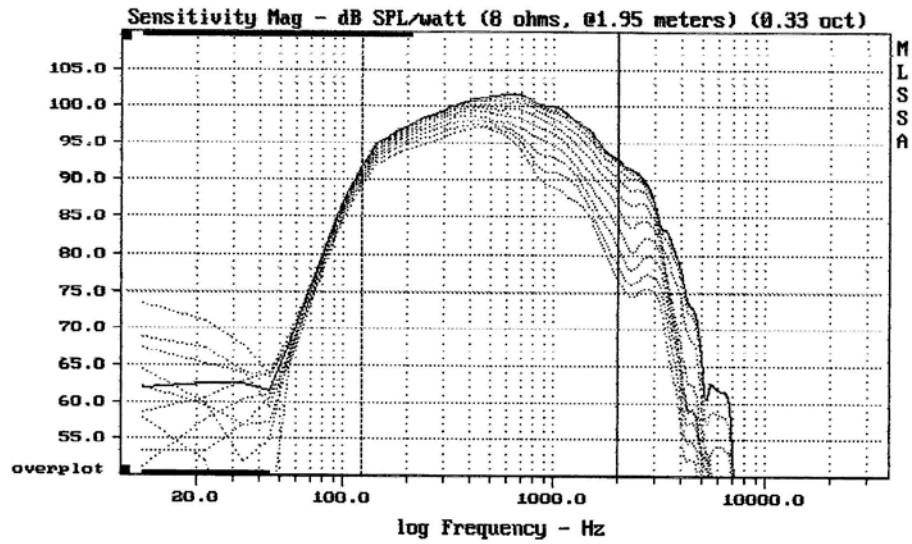

Overlay Compare: dev= +7.2/-6.4, std= 3.8, avg= -9.6

TTL11A-B


MLSSA: Frequency Domain

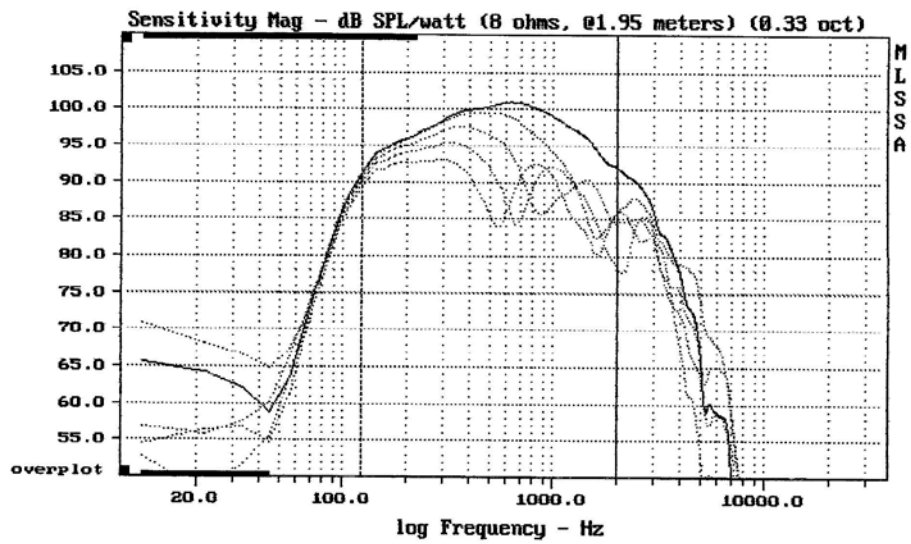

Overlay Compare: dev= +8.2/-6.5, std= 3.4, avg= -10

TTL11A-B


E-shop: <http://eshop.prodance.cz/ttl11ab/d-95914/>

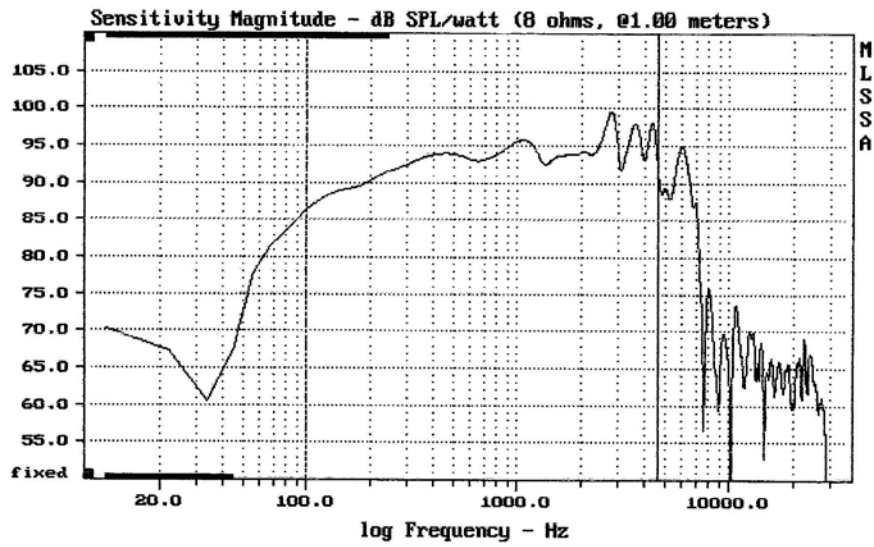

Level (100:4605 Hz) = 93.71 dB SPL/watt (8 ohms, 01.00 meters)

8" FROM TTL11A-B

MLSSA: Frequency Domain

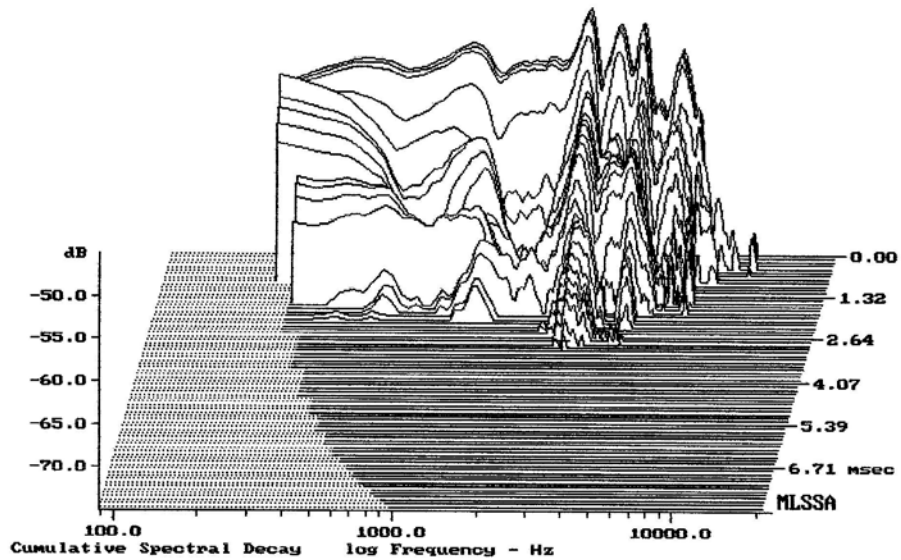

-74.10 dB, 2752 Hz (62), 2.970 msec (28)

E-shop: <http://eshop.prodance.cz/ttl11ab/d-95914/>

MLSSA SPO 4.0D #960903-3057-3075

Line	Parameter	Value	Units	QC Limits
1	RMSE-free	0.65	Ohms	
2	Fs	103.40	Hz	
3	Re	5.85	Ohms[dc]	
4	Res	135.00	Ohms	
5	Qms	11.73		
6	Qes	0.51		
7	Qts	0.49		
8	L1	0.56	mH	
9	L2	1.00	mH	
10	R2	3.82	Ohms	
11	RMSE-load	0.63	Ohms	
12	Vas(Sd)	8.45	liters	
13	Mms	20.29	grams	
14	Cms	117	$\mu\text{M}/\text{Newton}$	
15	B1	12.32	Tesla-M	
16	SPLref(Sd)	94.5	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (30.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.1% (-20% to -50% is recommended).

8" FROM TTL11A-B

MLSSA: Parameters

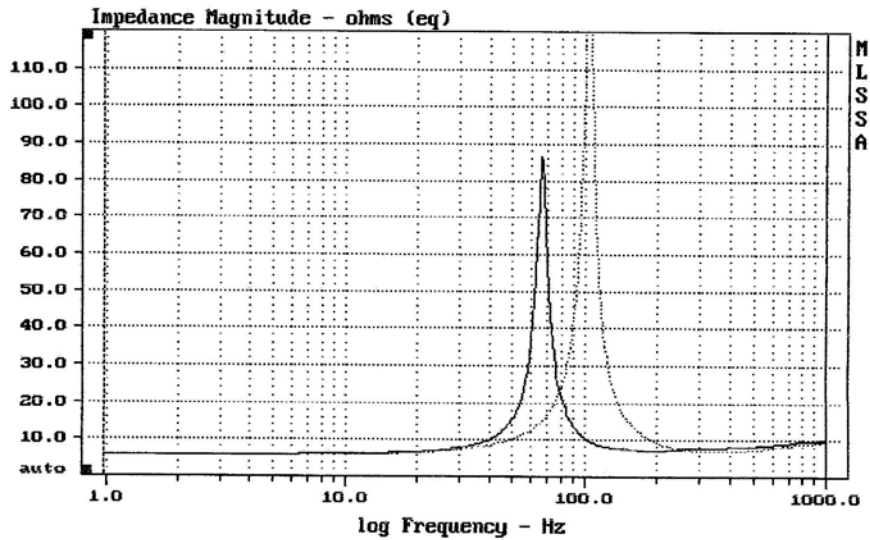

mean: 11.33, rms: 17.92, std: 13.89, max: 141.1, min: 5.911

MLSSA: Frequency Domain