


Level (100:3906 Hz) = 99.34 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 15W12P-Nd

MLSSA: Frequency Domain

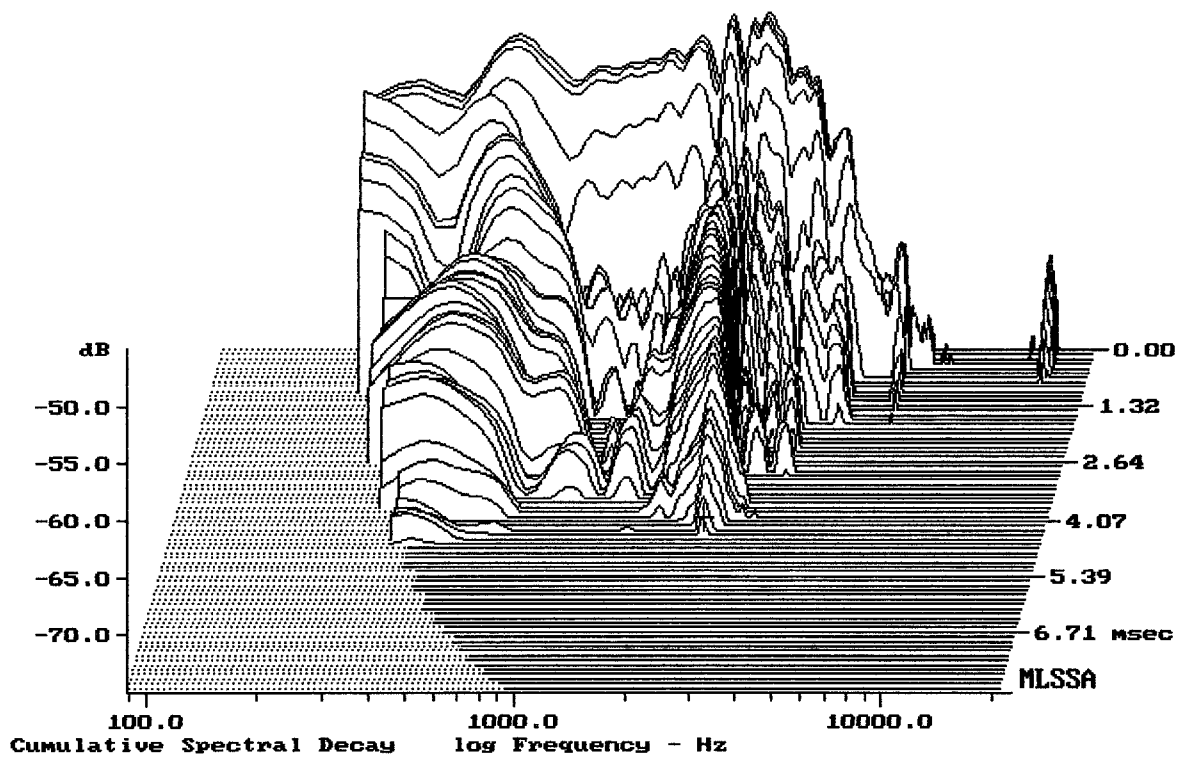

-73.50 dB, 2486 Hz (56), 4.400 msec (41)

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	41.25	Hz
3	Re	6.04	Ohms[dc]
4	Res	85.20	Ohms
5	Qms	10.22	
6	Qes	0.72	
7	Qts	0.68	
8	L1	0.48	mH
9	L2	0.76	mH
10	R2	5.09	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	230.89	liters
13	Mms	66.25	grams
14	Cms	225	$\mu\text{M}/\text{Newton}$
15	Bl	11.96	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.5% (-20% to -50% is recommended).

SELENIUM 15W12P-Nd

MLSSA: Parameters

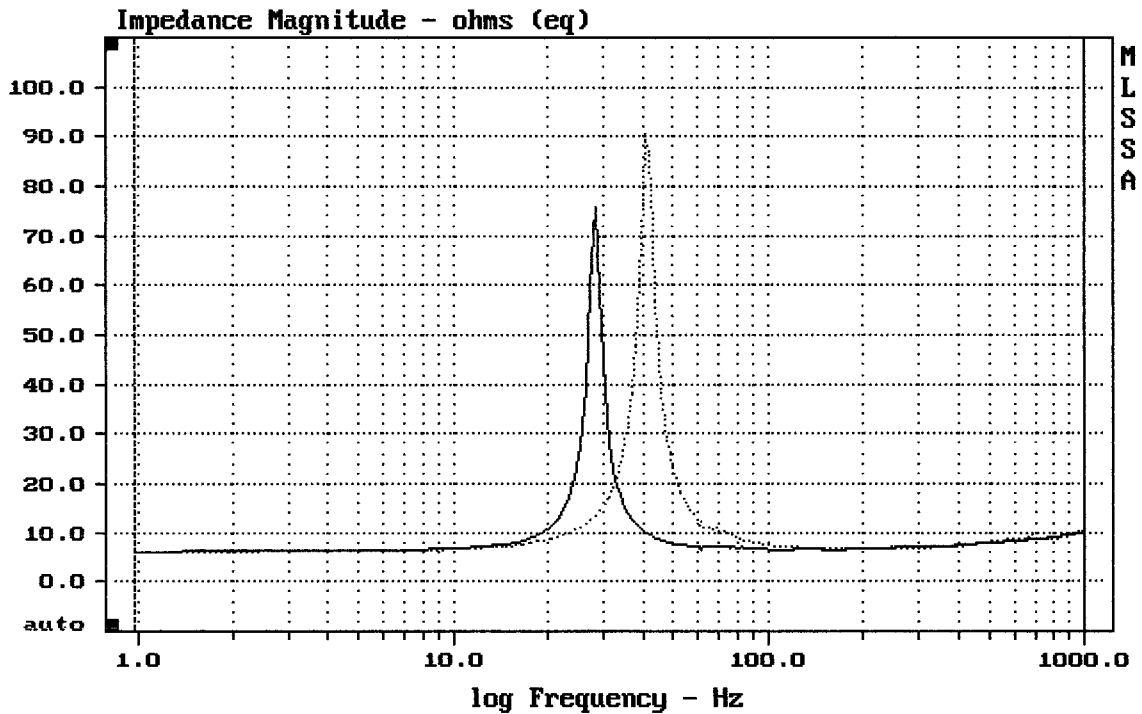

mean: 8.953, rms: 10.75, std: 5.955, max: 90.64, min: 6.114

MLSSA: Frequency Domain