


HORN HF66

Professional High Frequency Transducer

PART NUMBER **13133067**

Features

- 1-inch/1.4 inch Throat Adaptor
- 60° x 60° Constant Directivity Coverage
- Loading down to 500 Hz
- Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers
- Perfectly Controlled Dispersion


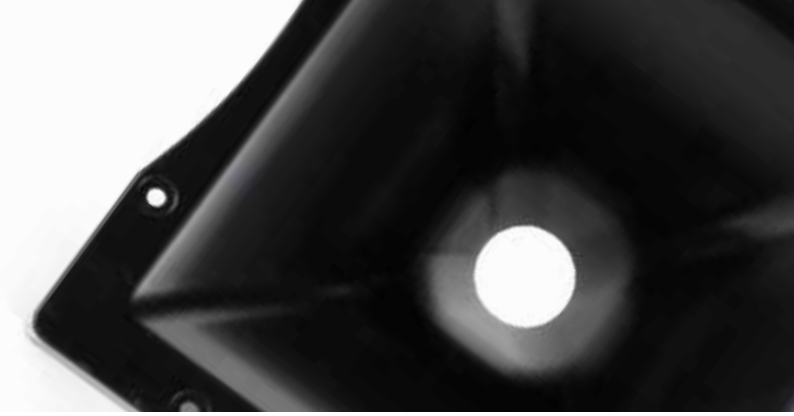


General Specifications



| | | |
|-------------------------|----------|---------|
| Throat Diameter | 36 / 1.4 | mm/inch |
| Nominal Coverage (-6dB) | 60x60 | |
| Cut-off Frequency | 500 | Hz |
| Material | Aluminum | |

Mounting Information


| | | |
|---------------------------|---------|----|
| Overall Dimensions | 250x250 | mm |
| Baffle Cut-out Dimensions | 200x200 | mm |
| Total Depth | 130 | mm |
| Driver Mounting | | |
| 4 x 6.5 mm holes | 101/76 | mm |
| Net Weight | 1.8 | kg |
| Shipping Weight | 2 | kg |

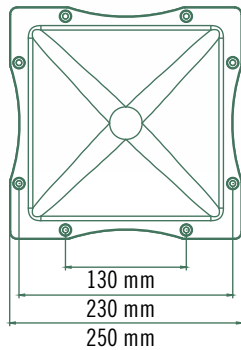


Response 1W/1m

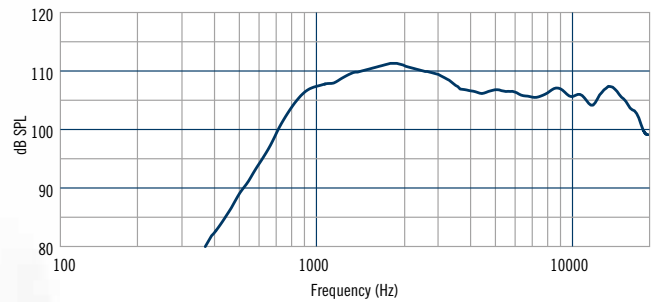


Horizontal 2000 Hz
1/3 Octave Polars




Horizontal 4000 Hz
1/3 Octave Polars




Horizontal 8000 Hz
1/3 Octave Polars




Vertical 2000 Hz
1/3 Octave Polars



Vertical 4000 Hz
1/3 Octave Polars



Vertical 8000 Hz
1/3 Octave Polars

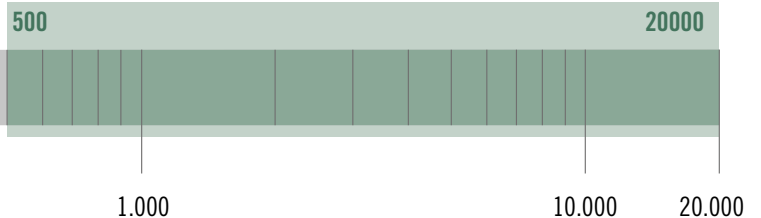

20

100

1.000

10.000

20.000