



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE
SPEAKER



Description

The KX 08-A is a compact, high-output 2-way active speaker system engineered for professional users, combining precise directivity, high SPL capability, and advanced system integration. The low-frequency section features an 8" neodymium driver in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 1.75" PKX dome, coupled to a 90° x 70° True Resistive Waveguide, rotatable by 90° to ensure flexible coverage options. An integrated two-channel 2000 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure with Quick Fit and M10 inserts supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

Features

- › 128 dB SPL Max
- › Rotatable 90° x 70° TRW horn
- › 8" neodymium woofer, 2.5" voice coil
- › 1,75" PKX dome, neodymium compression driver
- › Two-channel, 2000W Class-D amplifier
- › DSP Processing with FIRPHASE and BMC
- › RDNet Networked Management
- › powerCON TRUE1 TOP mains connectors

Part Number


13000895	KX 08-A	US	100-120 V	Black	EAN 8024530022907
13000900	KX 08-A	EU	220-240 V	Black	EAN 8024530022808
13000950	KX 08-A	UK	220-240 V	Black	EAN 8024530023355



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Line Art 2D

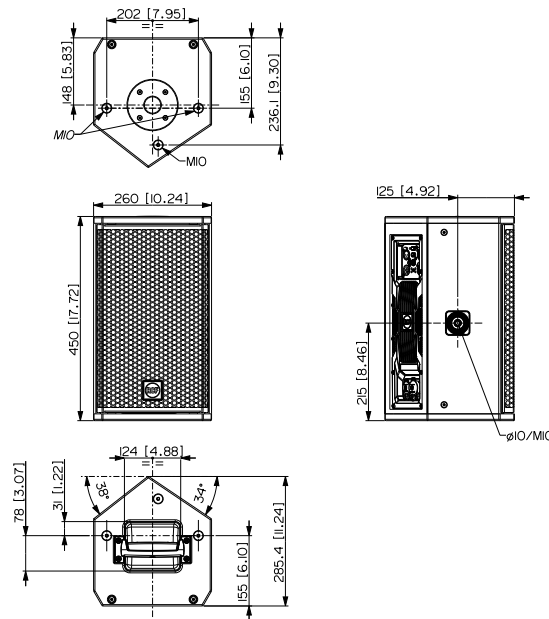

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	65 Hz - 20000 Hz
	Max SPL @ 1m	128 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	1 x 8" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1400Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume
Power section	RDNet	Onboard
	Total Power	2000 W Peak
	High frequencies	600 W Peak
	Mid frequencies	1400 W Peak
	Cooling	Convection
Standard compliance	Connections	Powercon TRUE1 TOP IN/OUT
	Safety agency	CE compliant



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	Baltic birch plywood			
	Hardware	3X M10 TOP AND BOTTOM 2X PIN D.10 AND M10 SIDE			
	Handles	1 TOP			
	Pole mount/Cap	35 mm insert			
	Grille	Steel with clothing			
	Color	Black			
	Size / Weight	Height	450 mm / 17.72 inches		
Width		260 mm / 10.24 inches			
Depth		285.4 mm / 11.24 inches			
Weight		11 kg / 24.25 lbs			
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	FLYING BRACKETS				
	13360031	AC EB 4X		EAN 8024530018870	
	HORIZONTAL BRACKETS				
	13360714	HBR60714	Black	EAN 8024530023171	
	POLE MOUNT KITS				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	VERTICAL BRACKETS				
	13360715	VBR60715	Black	EAN 8024530023188	
	Protections	COVERS			
		13360713	CVR60713	Black	EAN 8024530023164
		RAIN PROTECTIONS			
	Cables	13360689	RPR60689	Black	EAN 8024530022914
CABLES KIT					
13360102		AC XLR 3M3F		EAN 8024530006402	