



TT 515-A

PROFESSIONAL ACTIVE SPEAKER



Description	Flexibility, power, and compactness make the TT 515-A ideal for installed and portable professional applications where size and weight are critical factors. This approach combines the advantages of TT+ technology such as controlled dispersion, outstanding clarity and extreme power, multiple flexible rigging accessories, weatherproof protection, and RDNET real-time monitoring and management software with recallable presets. Its transducer configuration pairs two custom-loaded 5-inch cone drivers to a rotatable CMD waveguide surrounding a titanium 1.75-inch high-frequency compression driver. Whether it's used as a compact main system, as fills, or surrounds in a larger system, TT 515-A is quick to deploy and fast to tune.
--------------------	---

- | | |
|-----------------|---|
| Features | <ul style="list-style-type: none">› 127 dB max SPL› 100° x 70° coverage› LF 2 x 5" neodymium woofer, 2" voice coil› HF 1.75" titanium comp. driver› 2 x Class-D amplifiers, 1000 Watts RMS total power› 70 – 20.000 Hz frequency range› RDNet on board› FIRPHASE and Bass Motion Control |
|-----------------|---|


Part Number	13000686 TT 515-A	220-240 V	Black	EAN 8024530019471
	13000719 TT 515-A	115 V	Black	EAN 8024530019594



TT 515-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

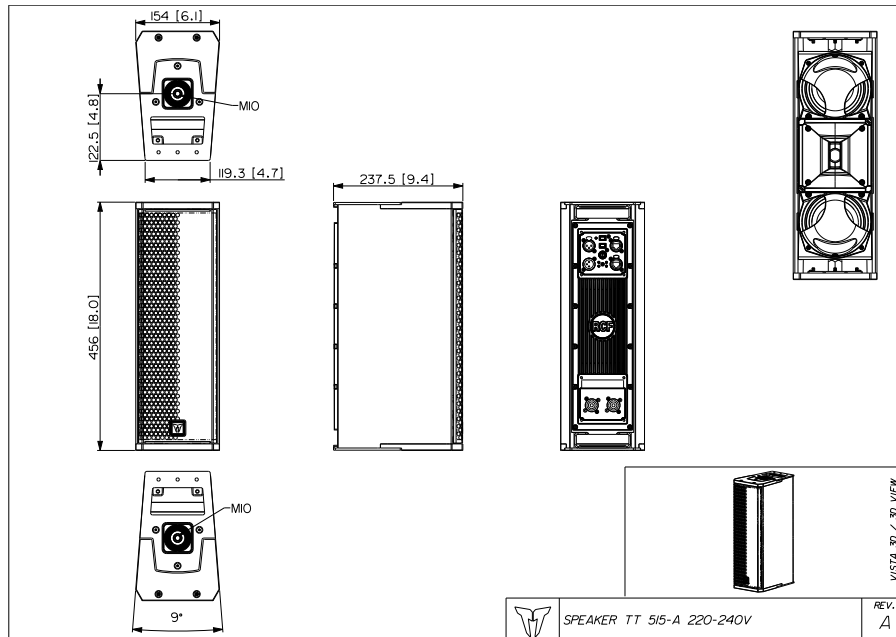

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	70 Hz - 20000 Hz
	Max SPL @ 1m	127 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	2 x 5.0" neo, 2.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1200
	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume, RDnet on board
Power section	RDNet	Onboard
	Total Power	2000 W Peak, 1000 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1400 W Peak, 700 W RMS
Standard compliance	Cooling	Convection
	Connections	Powercon IN/OUT
	Safety agency	CE compliant



TT 515-A

PROFESSIONAL ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material		Baltic birch plywood		
	Hardware		2X M10 TOP AND BOTTOM 2X PIN D.10		
	Handles		2 TOP AND BOTTOM		
	Grille		Steel		
	Color		Black		
Size / Weight	Height		456 mm / 17.95 inches		
	Width		154 mm / 6.06 inches		
	Depth		237.5 mm / 9.35 inches		
	Weight		9.8 kg / 21.61 lbs		
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	FLYING BRACKETS				
	13360691	FLB60691	Black	EAN 8024530022969	
	13360485	FL-BR TT 515	Black	EAN 8024530018924	
	HORIZONTAL BRACKETS				
	13360692	HBR60692	Black	EAN 8024530022976	
	LINK BARS				
	13360501	FL-B LINK TT 515		EAN 8024530019808	
	POLE MOUNT KITS				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360678	PMK60678	Black	EAN 8024530022563	
	13360679	PMK60679	White	EAN 8024530022570	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	VERTICAL BRACKETS				
	13360693	VBR60693	Black	EAN 8024530022983	
	Protections	RAIN PROTECTIONS			
		13360689	RPR60689	Black	EAN 8024530022914
Cables	CABLES KIT				
	13360102	AC XLR 3M3F		EAN 8024530006402	