


CSR Lamps

The GE CSR575/2/SE lamp is a single ended metal halide lamp with an outer jacket. It's small arc gap of 7 mm provides greater optical control and luminance. This lamp is compact, highly efficient, and at 7200K provides a white bright light. It is a cold start lamp with a maximum seal temperature of 350° C. The CSR575/2/SE is mainly used in event lighting.

Product Description CSR575/2/SE

Order Description	CSR575/2/SE
Product Code	15378
Pack Quantity	10
•Rated Wattage	575W
•Rated Voltage	97(+15-10)V
•Lamp Current (ECG/MCG)*	5.9A
• Ignition Voltage (cold/hot)	4.5
•Lumens	46,000 Lm
•Lumens per watt	80
•Ra	>65
•Chromaticity	x 0.302
coordinates	y 0.320
•Color temperature	7,200K
•Arc Length (C)	7.0±1.0mm
•Lamp length (A)	MAX125
Light center length (B)	65±1.0
•Lamp diameter	МАХф29
 Average rated life 	1,000hr
•Base	GX9.5

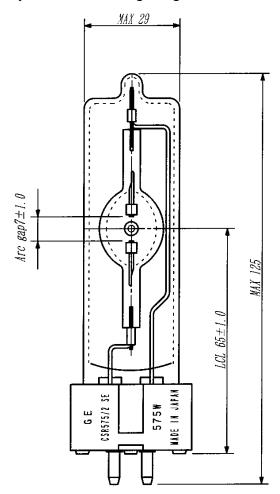

Lamp Operation

Burn Position Any Maximum Seal Temperature 350° C Cooling Forced Cooling/Fan Lamp can be used on electronic or AC magnetic Ballast/igniters

Application Information

- Do not exceed rated wattage or voltage
- •Replace lamp at or before rated life
- •Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts





GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product description in this brochure or intended so a general guide, and the wron, change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting control accept any liability orising from the reliance on such data to the extent permitted by low.

CSR575/2/SE - Data sheet - July 2006

^{*}ECG = electronic control gear/ MCG = Magnetic control gear